
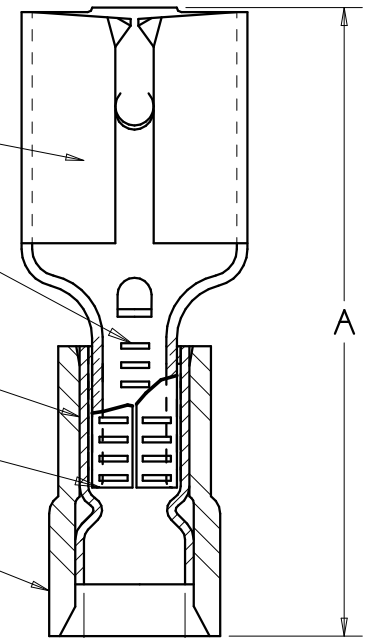


| PART NUMBER |          | TAB SIZE                            | WIRE RANGE<br>AWG<br>(mm <sup>2</sup> ) | HOUSING<br>COLOR | MAX<br>INSUL<br>DIA | DIMENSIONS in        |                      |                      |
|-------------|----------|-------------------------------------|-----------------------------------------|------------------|---------------------|----------------------|----------------------|----------------------|
| PREFIX      | PKG      |                                     |                                         |                  |                     | A $\pm .03$<br>(0.8) | B $\pm .01$<br>(0.3) | C $\pm .01$<br>(0.3) |
| DNF18-206   | -C<br>-M | .187/.205 X .020<br>(4.8/5.2 X 0.5) | 22-18<br>(.38-1.0)                      | RED              | .137<br>(3.48)      | .76<br>(19.3)        | .25<br>(6.4)         | .12<br>(3.0)         |
| DNF14-206   | -C<br>-M | .187/.205 X .020<br>(4.8/5.2 X 0.5) | 16-14<br>(1.5-2.5)                      | BLUE             | .162<br>(4.11)      | .76<br>(19.3)        | .25<br>(6.4)         | .12<br>(3.0)         |

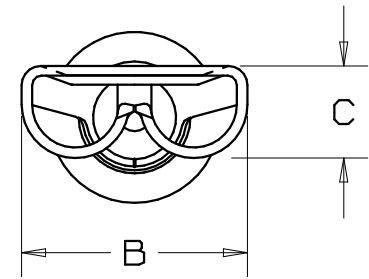

MAX WIRE  
INSUL DIA

## NOTES:

- UL LISTED AND CSA CERTIFIED FOR:
  - 300V. MAX. VOLTAGE RATING
  - STRANDED COPPER WIRE ONLY
  - 194° F (90° C) MAX. TEMP. RATING
- PACKAGE QTY: STD. PKG. -C= 100  
BULK PKG. -M= 1000
- MATERIAL:
  - STAMPING: .016 (0.41) THK BRASS, TIN PLATED
  - SLEEVE: BRASS, TIN PLATED
  - HOUSING: NYLON
- WIRE STRIP LENGTH  $9/32^{+1/32}_{-0}$  (7.1  $^{+0.8}_{-0}$ )
- INITIAL INSERTION FORCE - 12 LB. (53 N) MAX  
INITIAL WITHDRAWAL FORCE - 12 LB. (53 N) MAX  
6 LB. (27 N) MIN
- INSTALLATION TOOLS:
  - UL LISTED AND CSA CERTIFIED: CT-500
  - PANDUIT APPROVED: CT-100, CT-160, CT-260, CT-400, CT-460 (DNF14-187 ONLY), CT-550, CT-1550, CT-1551.
- DIMENSIONS IN BRACKETS ARE IN MILLIMETERS OR mm<sup>2</sup>



LISTED  
20H3  
E78522



CERTIFIED  
LR31212

A41586\_03

|     |      |      |     |                                          |         |      |     |                                                                         |                                                 |
|-----|------|------|-----|------------------------------------------|---------|------|-----|-------------------------------------------------------------------------|-------------------------------------------------|
| 03  | 2/07 | DAW  | DAW | ADDED DUAL TAB SIZE INFORMATION          | TRO0210 | LCA  | TRO |                                                                         |                                                 |
| 02  | 7/03 | KLFU | SKB | ADD INTERNAL SERRATIONS<br>REMOVED SLOTS | 12453   | SKB  | TRO |                                                                         |                                                 |
| 01  | 1/01 | RM   | SKB | FILESPEC WAS N41586AA_PCD_00             | 08933   | JAC  | CCH | NYLON INSULATED FEMALE DISCONNECT,<br>FUNNELED WIRE ENTRY (.206 SERIES) |                                                 |
| 00  | 1/96 | ED   |     | RELEASED                                 | 03871   |      |     |                                                                         |                                                 |
| REV | DATE | BY   | CHK | DESCRIPTION                              | ECN #   | CUST | PM  | DRAWN BY<br>EJD                                                         | CHK'D<br>SCALE<br>NONE<br>DRAWING NO.<br>A41586 |