

APPROVED: _____


DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	8/14/09	
A		ADDED DIM.	4/6/11	
B		ADDED CONTACTS TOLERANCES	11/5/15	AY/RT
C		UPDATE DRAWING	5/16/18	AY/MY

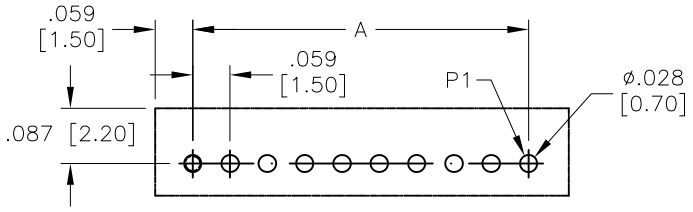


RECOMMENDED PCB LAYOUT

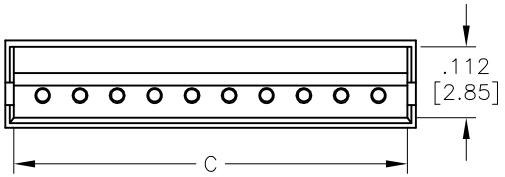




RECOMMENDED ASSEMBLY DIM.

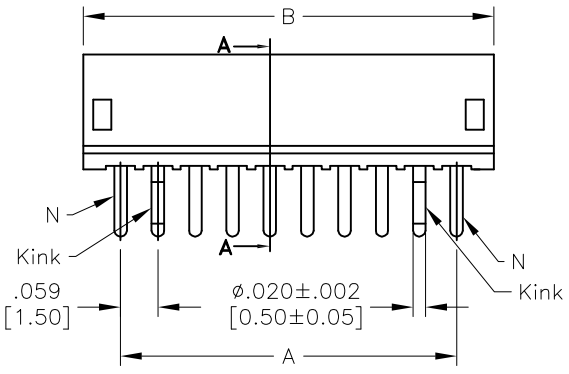

5~13P

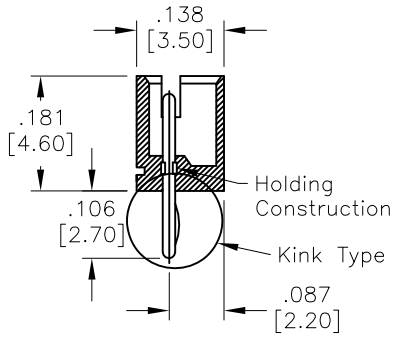

SECTION A–A

Circuit	KinK Circuit No.					
	1	2	3	4	5	6~13
2	KinK	KinK	—	—	—	—
3	KinK	—	KinK	—	—	—
4	KinK	—	—	KinK	—	—
5~13	N	KinK	—	—	KinK	N

SPECIFICATIONS:

Material:
Insulator: Nylon 66, rated UL 94V–0
Insulator color: Beige
Contacts: Brass

Plating:
Tin over Nickel underplate overall

Electrical:
Voltage rating: 50 V AC/DC
Current rating: 1 A AC/DC
Contact resistance: 20 mohms max
Insulation resistance: 500 Mohms min
Dielectric withstanding voltage: 500 VAC for 1 minute

Temperature Rating:
Operating temperature: –25°C to +85°C

Environmental:
Lead free, RoHS compliant.

RoHS COMPLIANT

Positions: 2 thru 13
A=.059 [1.50] X No. of Spaces
B=.059 [1.50] X No. of Positions + .059 [1.50]
c=.059 [1.50] X No. of Positions + .024 [0.60]

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	DY	8/14/09
CHECKED		
APPROVED		

ADAM TECH INTERCONNECTS
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE
.059 [1.50] VERTICAL HEADER

SIZE	PART NO.	REV.
X	15SH-A-XX-TS	C

REF: S00124T | SCALE: NTS | SHEET 1 OF 1