



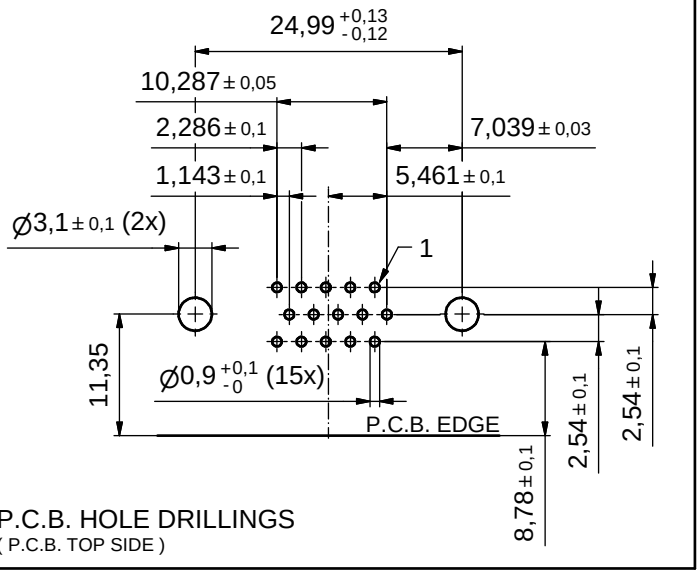


P.C.B. HOLE DRILLINGS
(P.C.B. TOP SIDE)

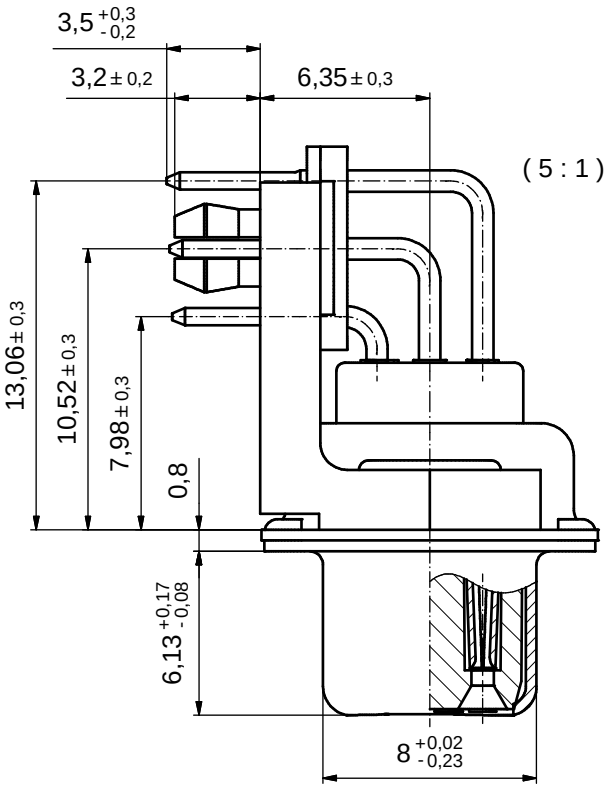

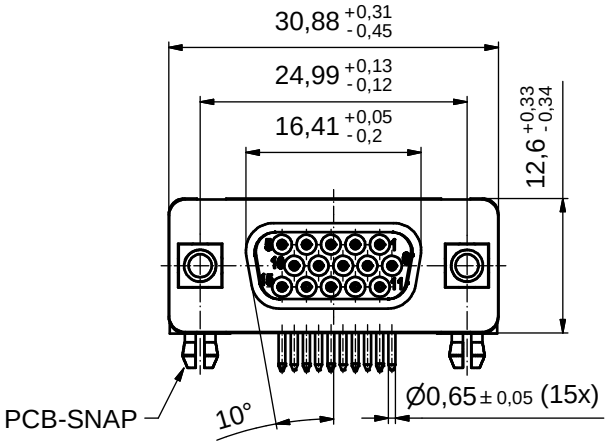

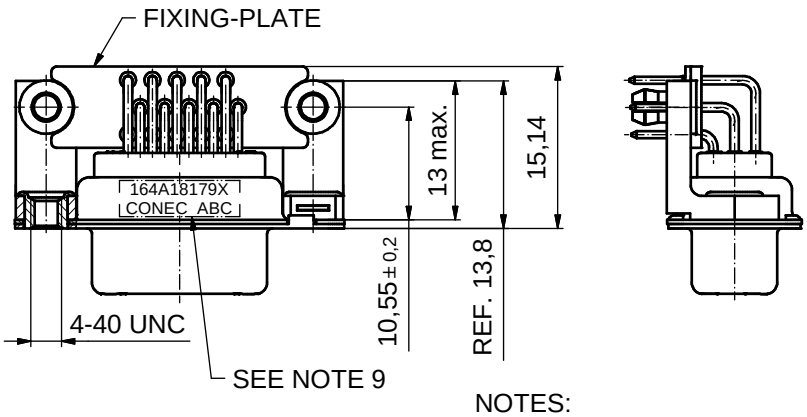



Directive 2002/95/EC „RoHS" Compliant

NOTES:

1. METALSHELLS: STEEL; min. 315µin TIN over 40-80µin NICKEL
2. INSULATORS: PBT GF UL 94 V-0; BLACK
3. CONTACTS: COPPER ALLOY
   PLATING: 8µin HARD GOLD over min. 50µin NICKEL
4. METAL BRACKETS: ZINC DIE CAST; 300µin COPPER/40-120µin NICKEL/120-200µin TIN
5. THREADED INSERTS: COPPER ALLOY; min. 200µin TIN over 80µin NICKEL
6. PCB-SNAPS: COPPER ALLOY; min. 200µin TIN over 80µin NICKEL
   PCB-HOLE: ø3,1± 0,1mm; PCB-THICKNESS: 1,6mm
7. FIXING-PLATE: PBT GF UL 94 V-0; BLACK
8. MAXIMUM TORQUE VALUE FOR THREAD: 6 in.LB
9. CONNECTOR IS PART MARKED: 164A18179X CONEC ABC

APPROVAL # FREIGABE # DEBLOCAGE # AUTORIZACION # APPROVAL

CUSTOMER APPROVAL DATE:

NAME: TITLE:

COMPANY NAME:

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH

DO NOT ALTER CAD DRAWING BY HAND

rev.	description	date	name
a	Origin		

tolerance: dim. in mm

	date	name
drawn	14.01.10	Lehmenkühler
appd.	14.01.10	Fischer
norm		
d-old		

scale: 2:1 (5:1)
material: SEE NOTES

title:
D-SUB HD FEMALE 90°
15pos. 0.350inch
thread insert, metal bracket, fixing-plate, snap

dwg no: 16K1A2595 | Inventor 10 | DIN-A3 | sh: 1

part no: 164A18179X

Downloaded from Arrow.com.