

WTS 2450


External Two-Way Radio Antenna

FEATURES

- Covers 2.4 to 2.5 GHz for 802.11b, and 4.9 to 6 GHz for 802.11a and all US, European, and Japanese WLAN applications
- Omni-directional patterns at all frequencies with increased gain in upper bands for optimal coverage


PARAMETER	SPECIFICATIONS
Frequency	2.4 - 2.5 GHz 4.9 - 5.875 GHz
Gain	2.1 dBi (2.45 GHz) 2.4 dBi (4.9 GHz) 2.6 dBi (5.25 GHz) 3.4 dBi (5.875 GHz)
Polarization	Vertical, Omni-directional
Nominal Impedance	50 ohms
VSWR	2:1 max across all bands
Size	95.9 mm (180° straight) or 75.4 mm (90° bent) x 9.3 mm dia.

VSWR

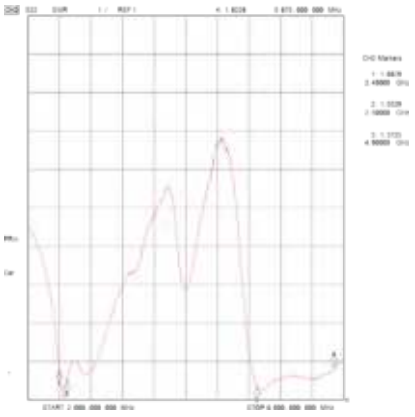


FREQUENCIES AND CONNECTOR


MODEL #	PART #	COLOR	CONNECTOR
WTSB2450- RPSMA	MAF94051	Black	RP-SMA
WTSB2450-SMA	MAF94271	Black	SMA




Azimuth
2.45 GHz



Azimuth
4.9 GHz



Azimuth
5.25 GHz



Azimuth
5.75 GHz

TE TECHNICAL SUPPORT CENTER

USA:	+1 (800) 522-6752
Canada:	+1 (905) 475-6222
Mexico:	+52 (0) 55-1106-0800
Latin/S. America:	+54 (0) 11-4733-2200
Germany:	+49 (0) 6251-133-1999
UK:	+44 (0) 800-267666
France:	+33 (0) 1-3420-8686
Netherlands:	+31 (0) 73-6246-999
China:	+86 (0) 400-820-6015

te.com

TE, TE Connectivity, TE connectivity (logo), and EVERY CONNECTION COUNTS are trademarks owned or licensed by the TE Connectivity plc family of companies. Other product names, logos, and company names mentioned herein may be trademarks of their respective owners.

While TE has made every reasonable effort to ensure the accuracy of the information in this document, TE does not guarantee that it is error-free, nor does TE make any other representation, warranty or guarantee that the information is accurate, complete, correct, reliable or current. TE reserves the right to make any adjustments to the information contained herein at any time without notice. TE EXPRESSLY DISCLAIMS ALL IMPLIED WARRANTIES REGARDING THE INFORMATION CONTAINED HEREIN, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. In no event will TE be liable for any direct, indirect, incidental, special or consequential damages arising from or related to recipient's use of the information. It is the sole responsibility of recipient of this information to verify the results of this information using their engineering and product environment. Recipient assumes any and all risks associated with the use of the information. Antenna performance may vary. TE is a component manufacturer, and customer and/or end-user is responsible for all end-use compliance and regulatory requirements.

©2025 TE Connectivity. All Rights Reserved.

06/25 **Original**