ATS19580

Large Air Gap, GMR Transmission Speed and Direction Sensor IC for Gear Tooth Sensing

FEATURES AND BENEFITS

- Fully integrated solution has GMR IC, protection capacitor, and back-bias magnet in a single in-line overmolded package
- Innovative GMR technology provides large operational air-gap sensing on ferromagnetic targets
- Advanced algorithms for flexible design-in and system compensation
  - Advanced vibration algorithms guarantee valid direction data
  - Automatically adapts to extreme mechanical changes (air gap) and thermal drifts
- Measures differentially to reject common-mode stray magnetic fields
- Orientation compatible with Hall-effect technology
- ASIL Compliant: ASIL B SEooC developed in accordance with ISO26262, when used as specified in the safety manual
- Integrated ASIL diagnostics and certified safety design process (optional fault reporting)

ISO 26262 ASIL Compliant

SOLIDSPEED DIGITAL ARCHITECTURE

BY ALLEGRO xMR

PACKAGE: 3-pin SIP (suffix SN)

Not to scale




DESCRIPTION

The ATS19580 is a giant-magnetoresistance (GMR) integrated circuit (IC) that provides a user-friendly two-wire solution for applications where speed and direction data is required using ferromagnetic gear-tooth targets. The fully integrated package includes the GMR IC, a protection capacitor for electromagnetic compatibility (EMC) robustness, and a back-bias magnet in a single in-line package (SIP).

The GMR-based IC is designed for use with ferromagnetic gear tooth targets and is orientation-compatible with Hall-effect technology. The fully integrated solution senses at large operating air gaps and over a large air-gap range. State-of-the-art GMR technology on a monolithic IC with industry-leading signal processing provides accurate speed and direction data in response to low-level differential magnetic signals. The differential sensing offers inherent rejection of interfering common-mode magnetic fields.

ATS19580 was developed in accordance with ISO 26262 as a hardware safety element out-of-context with ASIL B capability for use in automotive safety-related systems when integrated and used in the manner prescribed in the applicable safety manual and datasheet. Integrated diagnostics are used to detect an IC failure that would impact output protocol accuracy, providing coverage compatible with ASIL B. Built-in EEPROM scratch memory offers traceability of the device throughout the IC product lifecycle. ASIL reporting can be enabled or disabled as a product offering, depending on application needs.

The ATS19580 is provided in a lead (Pb) free 3-pin SIP package with tin leadframe plating. The SN package includes a GMR IC, a magnet, and capacitor integrated into a single overmold, with an additional molded lead-stabilizing bar for robust shipping and ease of assembly.

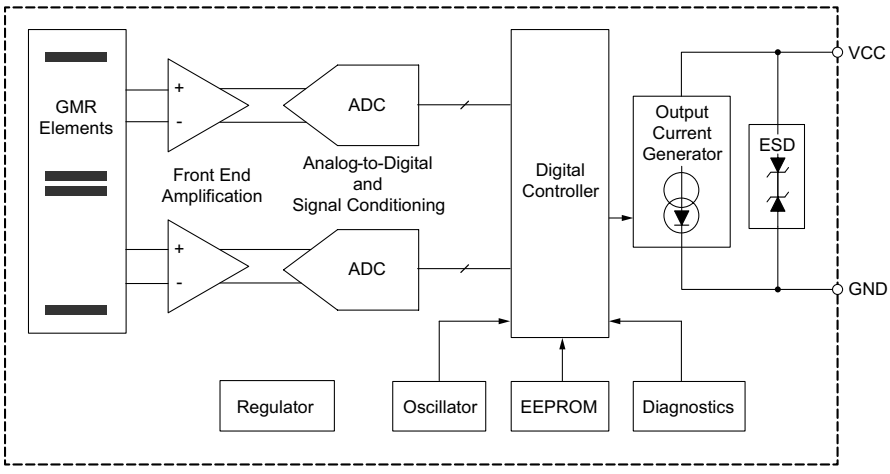


Functional Block Diagram

SELECTION GUIDE [1]

Part Number	Packing	Fault Detection Mode
ATS19580LSNBTN-FSNHPO-A	Tape and reel, 13-in. reel, 800 pieces per reel	Enabled
ATS19580LSNBTN-RSNHPO-A	Tape and reel, 13-in. reel, 800 pieces per reel	Enabled

[1] Not all combinations are available. For availability and pricing of custom programming options, contact Allegro sales.

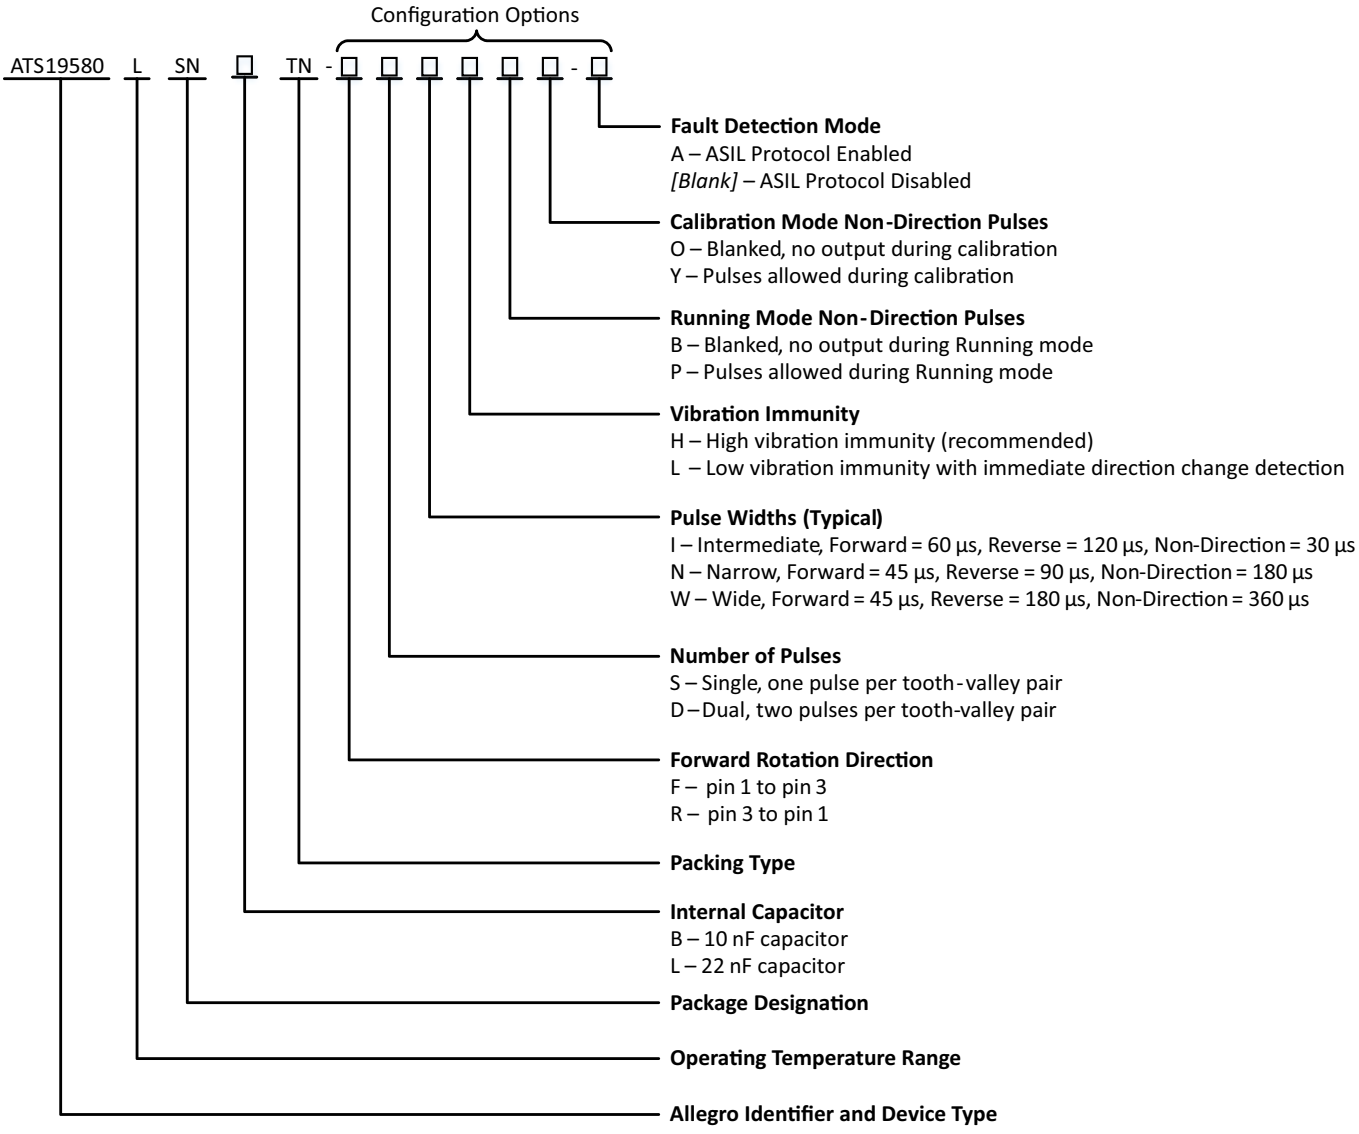


Allegro MicroSystems
955 Perimeter Road
Manchester, NH 03103-3353 U.S.A.
www.allegromicro.com

ABSOLUTE MAXIMUM RATINGS

Characteristic	Symbol	Notes	Rating	Units
Supply Voltage	V_{CC}	Refer to Power Derating section	28	V
Reverse Supply Voltage	V_{RCC}		–18	V
Operating Ambient Temperature	T_A	Range L	–40 to 150	°C
Maximum Junction Temperature	$T_{J(max)}$		165	°C
Storage Temperature	T_{stg}		–65 to 170	°C
Externally Applied Magnetic Flux Density	B	In any direction	500	G

PINOUT DIAGRAM AND TABLE



Package SN, 3-Pin SIP Pinout Diagram

Pinout List

Number	Name	Function
1	VCC	Supply Voltage
2	VCC	Supply Voltage
3	GND	Ground

Internal Components

Characteristic	Symbol	Notes		Rating	Units
Nominal Capacitance	C_{SUPPLY}	Connected between VCC and GND; refer to Figure 1	B	10	nF
			L	22	nF

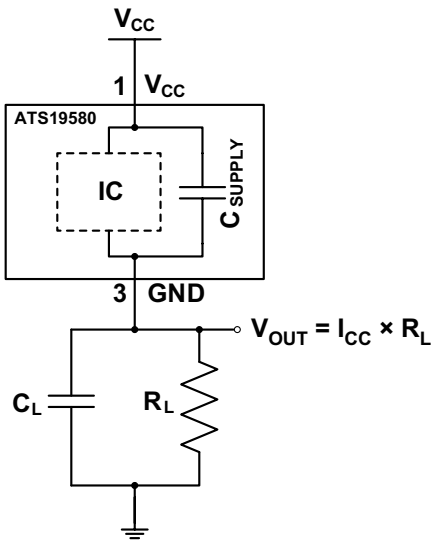


Figure 1: Typical Application Circuit

Allegro MicroSystems
955 Perimeter Road
Manchester, NH 03103-3353 U.S.A.
www.allegromicro.com

OPERATING CHARACTERISTICS: Valid throughout full operating and temperature ranges, unless otherwise specified

Characteristic	Symbol	Test Conditions		Min.	Typ. [1]	Max.	Unit
ELECTRICAL SUPPLY CHARACTERISTICS							
Supply Voltage [2]	V_{CC}	Voltage across pin 1 and pin 3; does not include voltage across R_L		4	–	24	V
Undervoltage Lockout	$V_{CC(UV)}$			–	–	3.95	V
Reverse Supply Current [3]	I_{RCC}	V_{CC} = –18 V		–10	–	–	mA
Supply Current	$I_{CC(LOW)}$	Low-current state		5.9	–	8	mA
	$I_{CC(HIGH)}$	High-current state		12	–	16	mA
Supply Current Transient	$I_{CC(STEP)}$	See Functional Description		5.9	–	8.5	mA
Supply Current Ratio	$I_{CC(HIGH)}$ / $I_{CC(LOW)}$	Ratio of high current to low current (isothermal)		1.9	–	–	–
ASIL Safety Current	I_{FAULT}	V_{CC} ≤ 14 V, A (ASIL) variant		1.5	–	3.9	mA
ELECTRICAL PROTECTION CHARACTERISTICS							
Supply Zener Clamp Voltage	$V_{Zsupply}$	I_{CC} = 19 mA		28	–	–	V
Reverse Supply Zener Clamp Voltage	$V_{RZSUPPLY}$	I_{CC} = –3 mA		–	–	–18	V
POWER-ON STATE CHARACTERISTICS							
Power-On State	POS	$V_{CC} > V_{CC(min)}$		$I_{CC(LOW)}$			–
Power-On Time [4]	t_{PO}	Time from $V_{CC} > V_{CC(min)}$, until device is in calibration mode		–	–	1	ms
OUTPUT CHARACTERISTICS							
Output Rise Time	t_r	Voltage measured at pin 3 (see Figure 1), R_L = 100 Ω, C_L = 10 pF, measured between 10% and 90% of signal	Capacitor L variant	0	4.5	8.8	µs
			Capacitor B variant	0	2	4	µs
Output Fall Time	t_r	Voltage measured at pin 3 (see Figure 1), R_L = 100 Ω, C_L = 10 pF, measured between 10% and 90% of signal	Capacitor L variant	0	4.5	8.8	µs
			Capacitor B variant	0	2	4	µs
Pulse Width, Fault	$t_{w(FAULT)}$	R_L = 100 Ω, C_L = 10 pF, pulse duration measured at threshold of ($I_{CC(LOW)}$ + I_{FAULT}) / 2	A (ASIL) variant	4	–	8	ms

Continued on next page...

Allegro MicroSystems
955 Perimeter Road
Manchester, NH 03103-3353 U.S.A.
www.allegromicro.com

OPERATING CHARACTERISTICS (continued): Valid throughout full operating and temperature ranges, unless otherwise specified

Characteristic	Symbol	Test Conditions	Min.	Typ. [1]	Max.	Unit
NARROW PULSE WIDTH OPTION (-xSNxxx variants) [5]						
Pulse Width, Forward Rotation	$t_{w(FWD)}$		38	45	52	µs
Pulse Width, Reverse Rotation	$t_{w(REV)}$		76	90	104	µs
Pulse Width, Nondirectional	$t_{w(ND)}$		153	180	207	µs
Operating Frequency, Forward Rotation	f_{FWD}		0	–	12	kHz
Operating Frequency, Reverse Rotation [6]	f_{REV}		0	–	7	kHz
Operating Frequency, Nondirectional Pulses [6]	f_{ND}		0	–	4	kHz
WIDE PULSE WIDTH OPTION (-xSWxxx variants) [5]						
Pulse Width, Forward Rotation	$t_{w(FWD)}$		38	45	52	µs
Pulse Width, Reverse Rotation	$t_{w(REV)}$		153	180	207	µs
Pulse Width, Nondirectional	$t_{w(ND)}$		306	360	414	µs
Operating Frequency, Forward Rotation	f_{FWD}		0	–	12	kHz
Operating Frequency, Reverse Rotation [6]	f_{REV}		0	–	4	kHz
Operating Frequency, Nondirectional Pulses [6]	f_{ND}		0	–	2.2	kHz
INTERMEDIATE PULSE WIDTH OPTION (-xSIxxx variants) [5][7]						
Threshold to Enter High-Speed Mode	f_{HIGH}	Increasing T_{CYCLE} frequency	0.935	1.1	1.265	kHz
Threshold to Exit High-Speed Mode	f_{LOW}	Decreasing T_{CYCLE} frequency	0.85	1	1.15	kHz
Pulse Pre-Low Length	$t_{W(PRE)}$		25	30	35	µs
Pulse Width, Forward Rotation	$t_{W(FWD)}$	T_{CYCLE} frequency < f_{LOW}	51	60	69	µs
Pulse Width, Reverse Rotation	$t_{W(REV)}$	T_{CYCLE} frequency < f_{LOW}	102	120	138	µs
Pulse Width, Nondirectional	$t_{W(ND)}$		25	30	35	µs
Pulse Width, High Speed	$t_{W(HS)}$	T_{CYCLE} frequency > f_{HIGH}	25	30	35	µs
Operating Frequency, Forward Rotation	f_{FWD}	Direction data is not available when frequency > f_{HIGH}	0	–	12	kHz
Operating Frequency, Reverse Rotation	f_{REV}	Direction data is not available when frequency > f_{HIGH}	0	–	12	kHz
Operating Frequency, Nondirectional Pulses	f_{ND}	Direction data is not available when frequency > f_{HIGH}	0	–	12	kHz


Continued on next page...

Allegro MicroSystems
955 Perimeter Road
Manchester, NH 03103-3353 U.S.A.
www.allegromicro.com

OPERATING CHARACTERISTICS (continued): Valid throughout full operating and temperature ranges, unless otherwise specified

Characteristic	Symbol	Test Conditions	Min.	Typ. [1]	Max.	Unit
Operational Air Gap Range [8]	AG	Using Allegro Reference Target 60-0, tested at 1000 rpm	1.5	–	4.5	mm
Operate Point	B_{OP}	Percentage of IC-processed magnetic signals; see Figure 3	–	70	–	%
Release Point	B_{RP}	Percentage of IC-processed magnetic signals; see Figure 3	–	30	–	%
PERFORMANCE CHARACTERISTICS						
Initial Calibration	T_{CAL}	Amount of target rotation (constant direction) after t_{PO} to first valid speed and direction output; see Figure 2	–	3	4	T_{CYCLE}
Vibration Immunity (Startup)		Refer to Functional Description section	1	–	–	T_{CYCLE}
Vibration Immunity (Running Mode)		Refer to Functional Description section	1	–	–	T_{CYCLE}
First Direction-Pulse Output Following Direction Change		High Vibration (-xxxHxxxx variant)	_	–	3	T_{CYCLE}
		Low Vibration (-xxxLxxxx variant)	_	–	1.5	T_{CYCLE}
First Direction-Pulse Output Following Running Mode Vibration			_	–	3.5	T_{CYCLE}
Tooth-to-Tooth Variation over 1 T_{CYCLE}		Using Allegro Reference Target 60-0, [9] correct output sequence	–	0.25	–	mm
Total Air Gap Variation During Operation		Momentary interruptions in output sequence permitted; operation within air-gap range	–3	–	3	mm
THERMAL CHARACTERISTICS						
Package Thermal Resistance [10]	$R_{\theta JA}$	Single-layer PCB with copper limited to solder pads	–	150	–	°C/W

[1] Typical values are at V_{CC} = 5 V and T_A = 25°C, unless otherwise specified. Performance might vary for individual units, within the maximum and minimum limits.
[2] Maximum voltage must be adjusted for power dissipation and junction temperature; see Power Derating section.
[3] Negative current is defined as conventional current coming out of (sourced from) the specified device terminal.
[4] Output transients prior to t_{PO} should be ignored.
[5] R_L = 100 Ω and C_L = 10 pF. Pulse duration measured at threshold of $(I_{CC(HIGH)} + I_{CC(LOW)}) / 2$.
[6] Maximum operating frequency is determined by satisfactory separation of output pulses. If shorter low-state durations can be resolved, the maximum f_{REV} and f_{ND} might be higher.
[7] For the intermediate pulse-width variant, direction data is not available in high-speed mode.
[8] Operating air gap is dependent on the available magnetic field. The available field is dependent on target geometry and material, and it should be independently characterized.
[9] To determine IC tolerance to air-gap variations on other targets, the complete magnetic system must be analyzed. Due to the nature of the GMR system, contact Allegro for assistance in assessing other targets for use with ATS19580.
[10] Additional thermal information is available on the Allegro website.

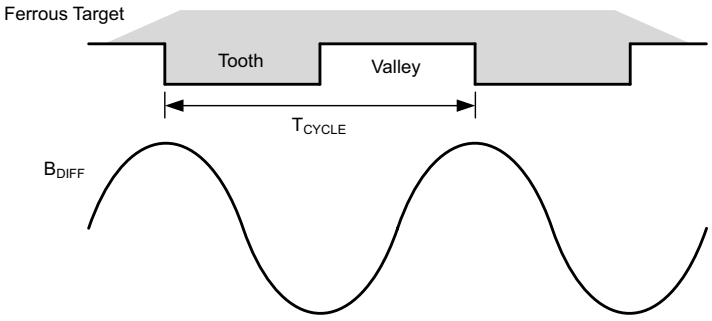


T_{CYCLE} = Target Cycle; the amount of rotation that moves one tooth and valley across the sensor.


B_{DIFF} = The differential magnetic flux density sensed by the sensor.

Figure 2: Definition of T_{CYCLE}

Allegro MicroSystems
955 Perimeter Road
Manchester, NH 03103-3353 U.S.A.
www.allegromicro.com


ALLEGRO REFERENCE TARGET 60-0 (60-TOOTH TARGET)

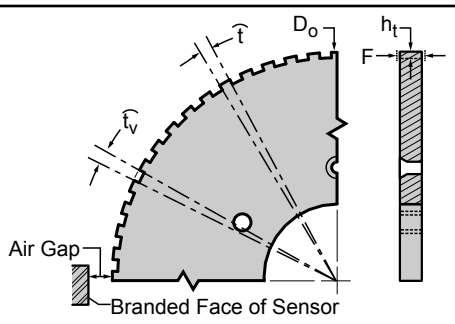
Characteristics	Symbol	Test Conditions	Typ.	Units	Symbol Key
Outside Diameter	D_o	Outside diameter of target	120	mm	
Face Width	F	Breadth of tooth, with respect to branded face	6	mm	
Circular Tooth Length	t	Length of tooth, with respect to branded face	3	degrees	
Circular Valley Width	t_v	Length of valley, with respect to branded face	3	degrees	
Tooth Whole Depth	h_t		3	mm	
Material		Low-carbon steel	–	–	

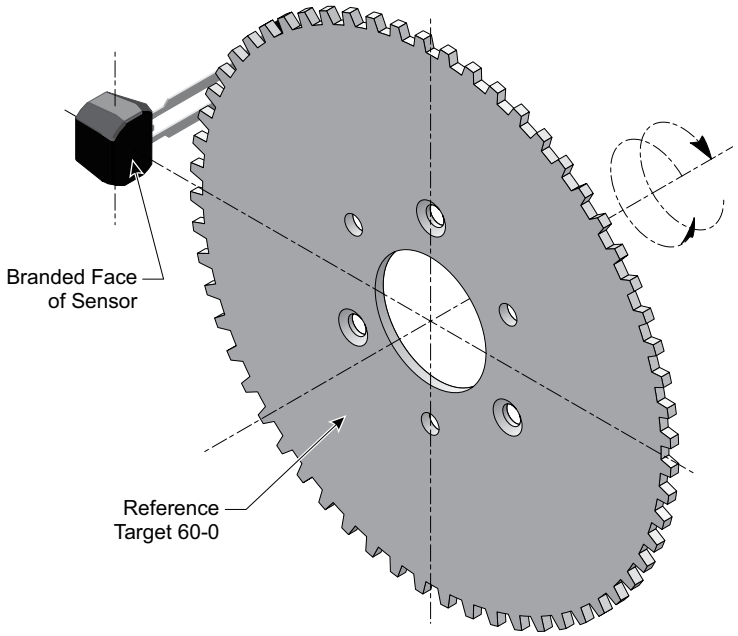



Allegro MicroSystems
955 Perimeter Road
Manchester, NH 03103-3353 U.S.A.
www.allegromicro.com


CHARACTERISTIC PLOTS

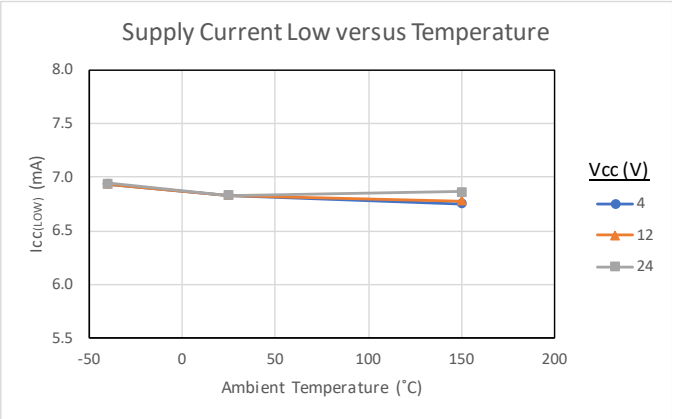


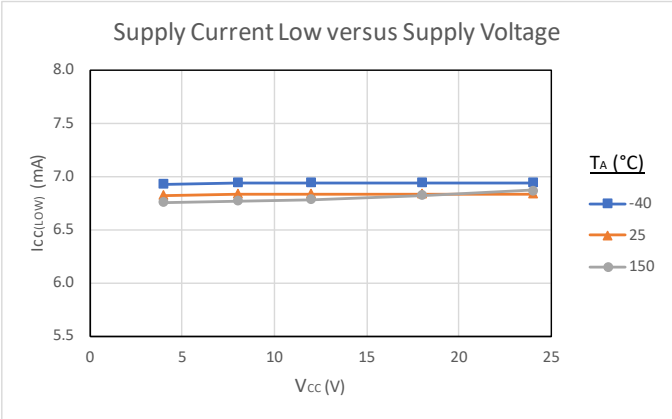

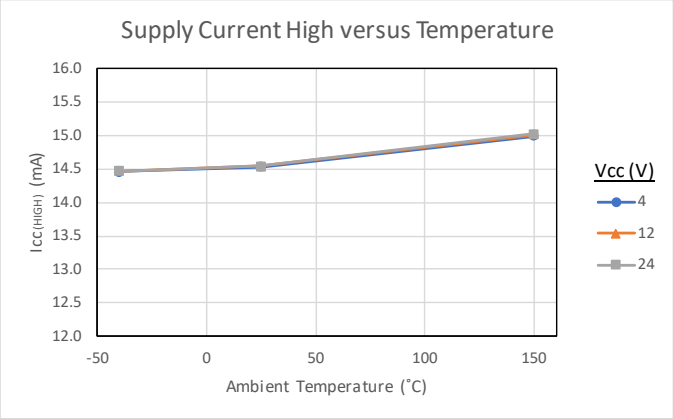

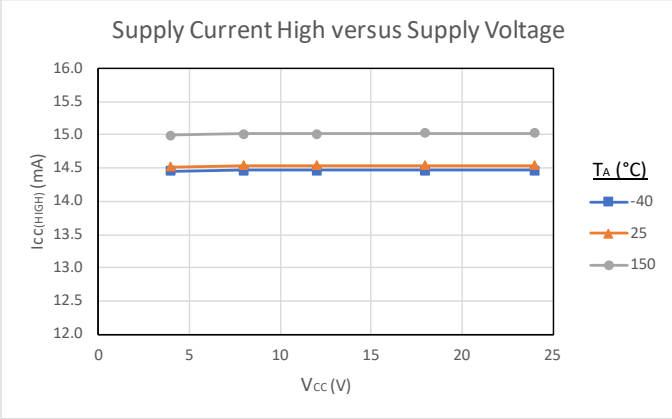


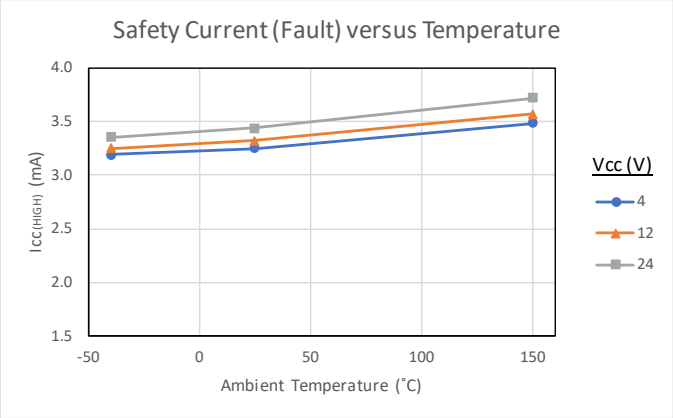


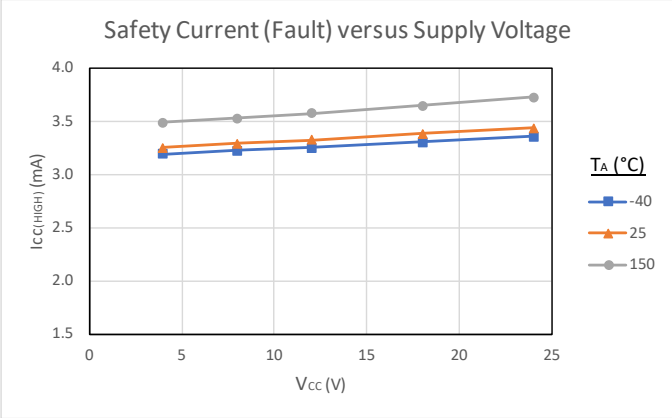


Allegro MicroSystems
955 Perimeter Road
Manchester, NH 03103-3353 U.S.A.
www.allegromicro.com

CHARACTERISTIC PLOTS (continued)

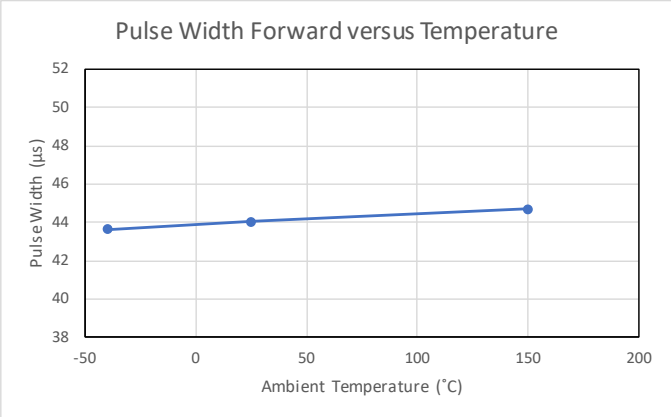

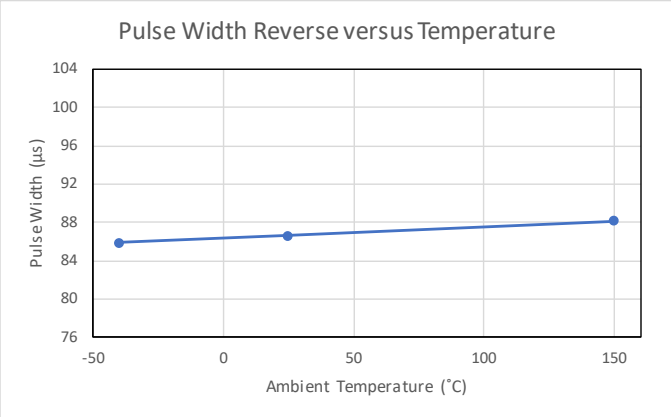

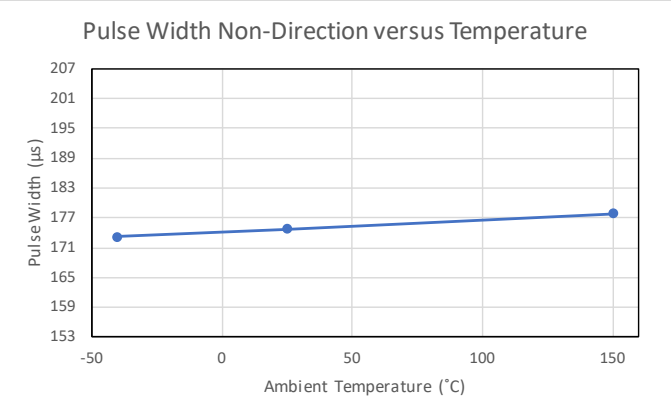

Allegro MicroSystems
955 Perimeter Road
Manchester, NH 03103-3353 U.S.A.
www.allegromicro.com

FUNCTIONAL DESCRIPTION

Sensing Technology

The sensor IC contains on-chip GMR elements that are used to detect magnetic signals created by an adjacent target. These transducers provide electrical signals that contain data regarding the edge position and direction of target rotation. The ATS19580 is intended for use with ferromagnetic targets.

After proper power is applied to the sensor IC, it is capable of providing digital data that is representative of the features of a rotating target. The waveform diagrams in Figure 3 present the automatic translation of the target profiles, through their induced magnetic profiles, to the digital output signal of the sensor IC.

Data Protocol Description

When a target passes in front of the device (opposite the branded face of the package case), the ATS19580 S variant generates an output pulse for each tooth-valley pair of the target. Speed data is provided by the output pulse rate, while direction of target rotation data is provided by the duration of the output pulse. The sensor IC can sense target movement in both the forward and reverse directions.

VARIANTS

Forward and reverse rotation for the F variant of the sensor IC is shown in Figure 4, where forward is defined as target motion from pin 1 to 3. The sensor IC can also be factory-programmed for the opposite definition (R variant), where forward is defined as target motion from pin 3 to 1.

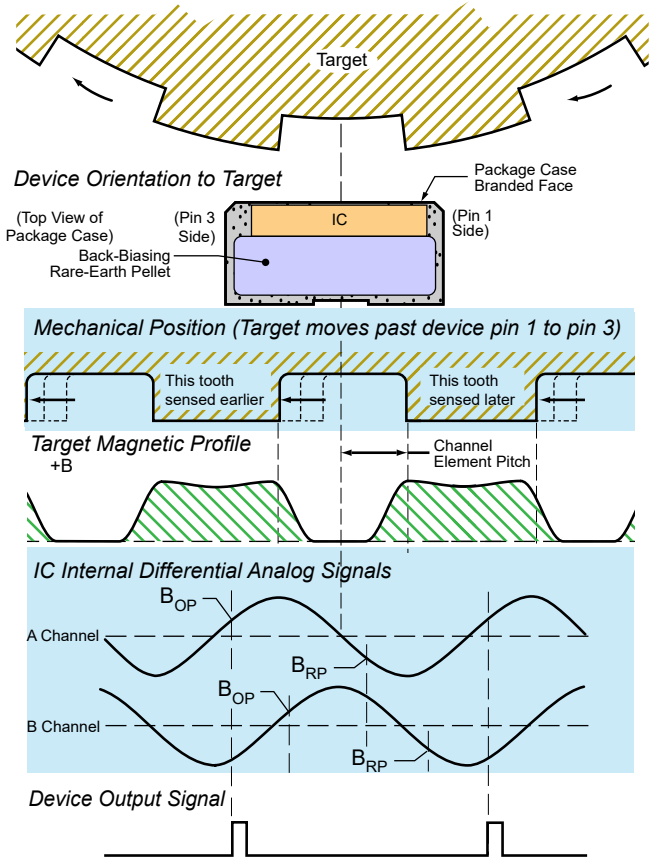


Figure 3: Magnetic Profile

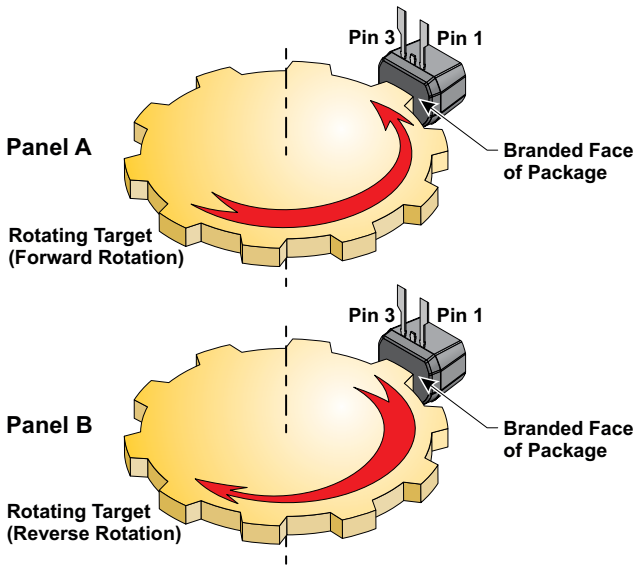


Figure 4: Target Rotation (F Variant Shown)

Allegro MicroSystems
955 Perimeter Road
Manchester, NH 03103-3353 U.S.A.
www.allegromicro.com

Target Design

The ATS19580 is designed to work with a variety of target shapes and sizes in addition to the Allegro Reference Target 60-0 design presented in this datasheet. To determine the operating air-gap range for each target, as well as the suitability for proper direction and vibration detection, the magnetic profile of each must be analyzed.

Power-On (Calibration)

After power is applied to the sensor IC, the IC internally detects the magnetic profile of the target. Operation begins with a calibration period, during which the sensor IC does not provide direction data; direction pulses are provided once constant direction of rotation is determined. During calibration, nondirectional pulses ($t_{W(ND)}$) are either provided or not provided depending on the selected variant.

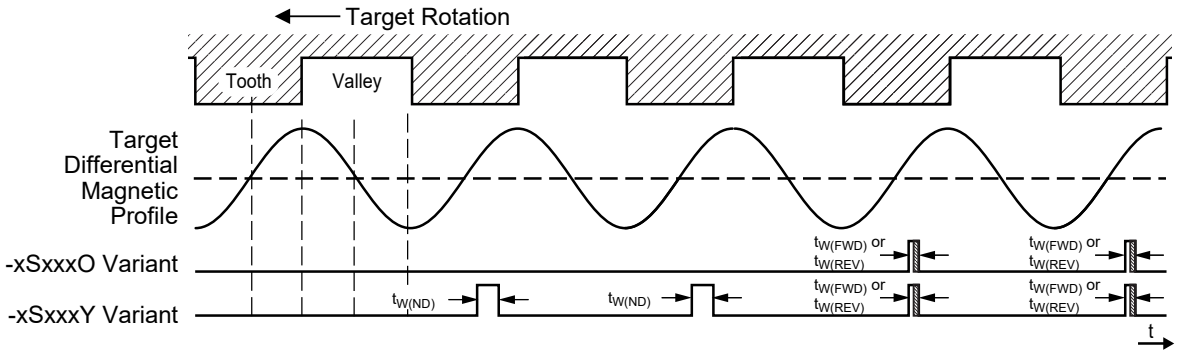


Figure 5: Output Options After Power-On

Allegro MicroSystems
955 Perimeter Road
Manchester, NH 03103-3353 U.S.A.
www.allegromicro.com

Vibration

The IC has vibration detection ability, where vibration is defined as multiple changes in target direction within the vibration immunity specification. Two vibration output protocols are available, where the first change in direction is either provided to the output or suppressed. Options are also available such that nondirectional pulses are provided during the vibration event until constant target rotation is validated. If the nondirectional option is selected, output pulses of $t_{w(ND)}$ might or might not occur, depending on the amplitude and phase of the vibration.

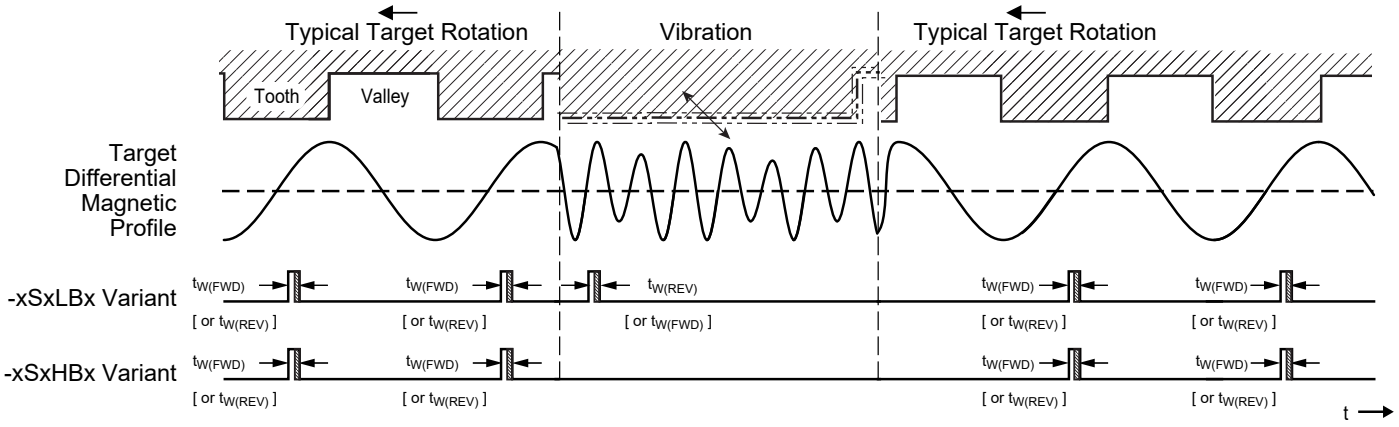


Figure 6: Output Functionality in the Presence of Running-Mode Target Vibration

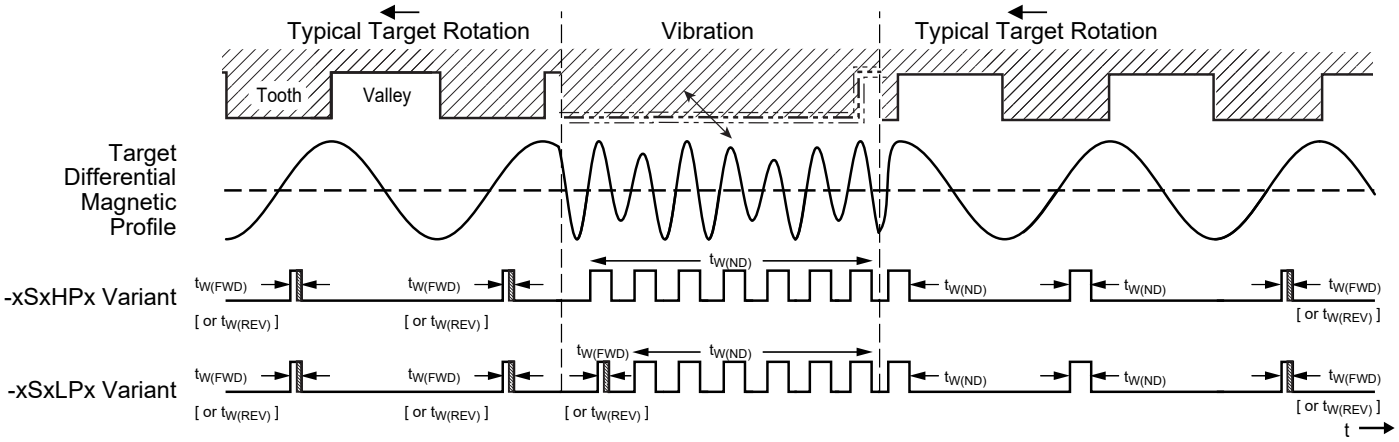


Figure 7: Output Functionality in the Presence of Running-Mode Target Vibration with Nondirectional Pulses

Allegro MicroSystems
955 Perimeter Road
Manchester, NH 03103-3353 U.S.A.
www.allegromicro.com

ASIL Safe State

The A19580 sensor IC contains diagnostic circuitry that continuously monitors occurrences of failure defects within the IC. For the output protocol of the ASIL safe state, refer to Figure 8. For additional details, refer to the ATS19580 Safety Manual.

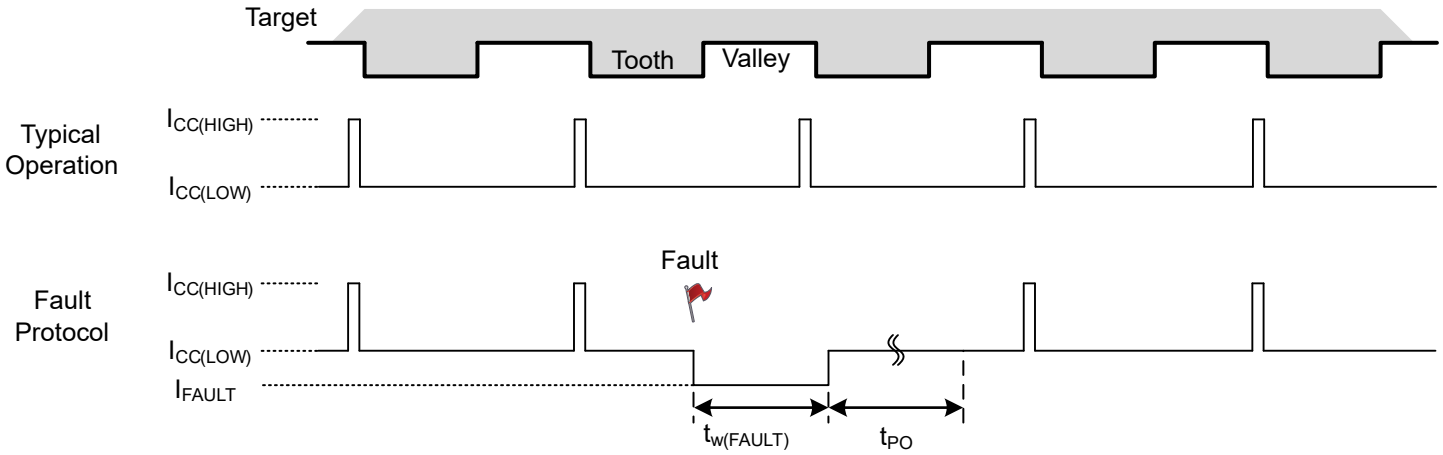


Figure 8: Output Protocol (ASIL Safe State)

Allegro MicroSystems
955 Perimeter Road
Manchester, NH 03103-3353 U.S.A.
www.allegromicro.com

POWER DERATING

The device must be operated at less than the maximum junction temperature of the device ($T_{J(max)}$). Under certain combinations of peak conditions, reliable operation might require derating supplied power or improving the heat dissipation properties of the application. This section presents a procedure for correlating factors affecting operating T_J. (Thermal data is also available on the Allegro website.)

The package thermal resistance ($R_{\theta JA}$) is a figure of merit summarizing the ability of the application and the device to dissipate heat from the junction (die), through all paths to the ambient air. Its primary component is the effective thermal conductivity (K) of the printed circuit board, including adjacent devices and traces. Radiation from the die through the device case ($R_{\theta JC}$) is a relatively small component of $R_{\theta JA}$. Ambient air temperature (T_A) and air motion are significant external factors, damped by overmolding.

The effect of varying power levels (power dissipation, P_D), can be estimated. The following formulas represent the fundamental relationships used to estimate T_J, at P_D.

Equation 1 $\quad P_D = V_{IN} \times I_{IN}$

Equation 2: $\quad \Delta T = P_D \times R_{\theta JA}$

Equation 3: $\quad T_J = T_A + \Delta T$

For example, given common conditions such as: T_A= 25°C, V_{CC} = 12 V, I_{CC} = 7 mA, and $R_{\theta JA}$ = 150°C/W, then:

$$P_D = V_{CC} \times I_{CC} = 12\ V \times 7.0\ mA = 84\ mW$$

$$\Delta T = P_D \times R_{\theta JA} = 84\ mW \times 150°C/W = 12.6°C$$

$$T_J = T_A + \Delta T = 25°C + 12.6°C = 37.6°C$$

A worst-case estimate, $P_{D(max)}$, represents the maximum allowable power level ($V_{CC(max)}$, $I_{CC(max)}$), without exceeding $T_{J(max)}$, at a selected $R_{\theta JA}$ and T_A

Example: Reliability for V_{CC} at T_A=150°C, package SN, using a single-layer PCB.

Observe the worst-case ratings for the device, specifically: $R_{\theta JA}$ =150°C/W, $T_{J(max)}$ =165°C, $V_{CC(max)}$ = 24 V, and $I_{CC(avg)}$ = 14.6 mA. $I_{CC(avg)}$ is computed using $I_{CC(LOW)(max)}$ and $I_{CC(HIGH)(max)}$, with a duty cycle of 83% computed from $t_{w(REV)(max)}$ on-time at 4 kHz maximum operating frequency.

Calculate the maximum allowable power level, $P_{D(max)}$. First, invert Equation 3:

$$\Delta T_{max} = T_{J(max)} - T_A = 165°C - 150°C = 15°C$$

This provides the allowable increase to T_J resulting from internal power dissipation. Then, invert Equation 2:


$$P_{D(max)} = \Delta T_{max} \div R_{\theta JA} = 15°C \div 150°C/W = 100\ mW$$


Finally, invert Equation 1 with respect to voltage:

$$V_{CC(est)} = P_{D(max)} \div I_{CC(avg)} = 100\ mW \div 14.6\ mA = 6.8\ V$$

The result indicates that, at T_A, the application and device cannot dissipate adequate amounts of heat at operating voltages greater than 6.8 V at 150°C.

Compare $V_{CC(est)}$ to $V_{CC(max)}$. If $V_{CC(est)} \leq V_{CC(max)}$, then reliable operation between $V_{CC(est)}$ and $V_{CC(max)}$ requires enhanced $R_{\theta JA}$. If $V_{CC(est)} \geq V_{CC(max)}$, then operation between $V_{CC(est)}$ and $V_{CC(max)}$ is reliable under these conditions.

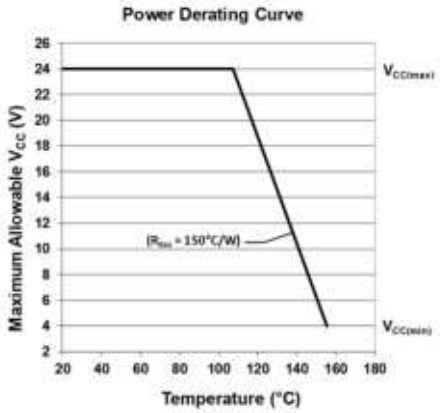

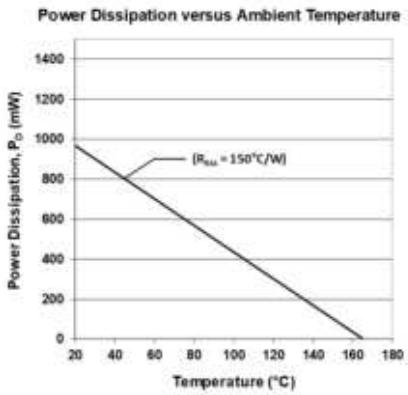


Allegro MicroSystems
955 Perimeter Road
Manchester, NH 03103-3353 U.S.A.
www.allegromicro.com

PACKAGE OUTLINE DRAWING

For Reference Only – Not for Tooling Use

(Reference Allegro DWG-0000429, Rev. 5)
Dimensions in millimeters – NOT TO SCALE
Dimensions exclusive of mold flash, gate burs, and dambar protrusions
Exact case and lead configuration at supplier discretion within limits shown

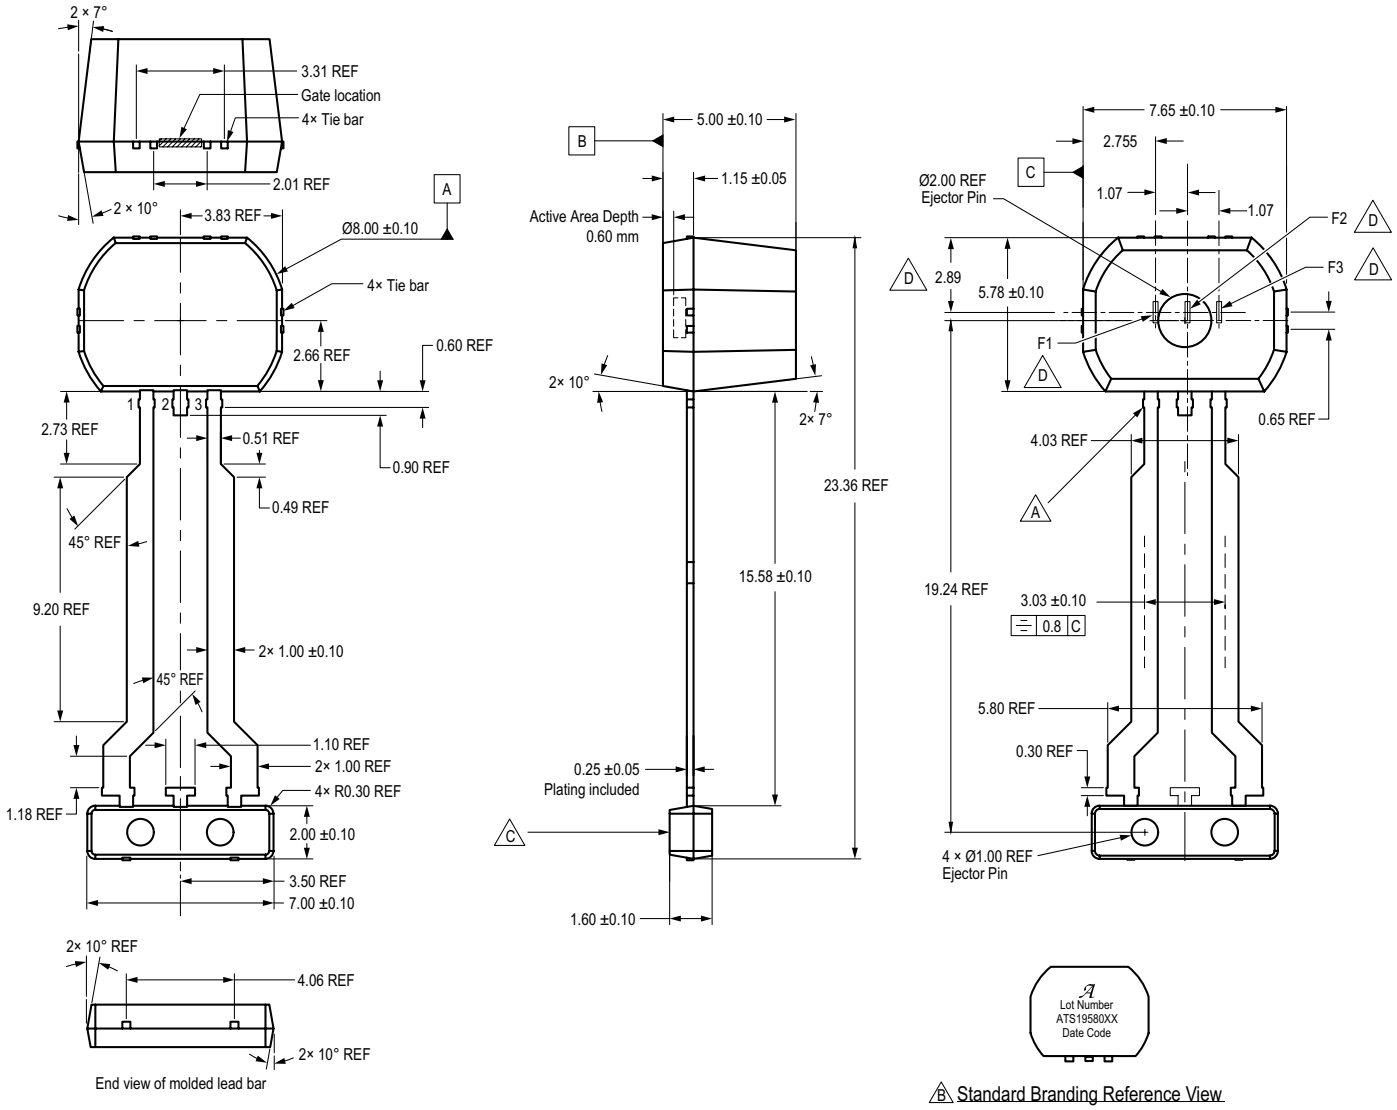

A Dambar removal protrusion (24×)

B Branding scale and appearance at supplier discretion

C Molded lead bar for preventing damage to leads during shipment

D GMR elements (F1, F2, F3); not to scale

B Standard Branding Reference View

Lines 1, 2, 3, 4: Max. 10 characters per line

Line 1: Logo A
Line 2: Characters 5, 6, 7, 8, 9, 10, 11 of Assembly Lot Number
Line 3: 3-character Prefix (ATS), 5-digit Part Number (19580), 0-2 character Package Variant (XX).
Line 4: 4-digit Date Code

Figure 9: Package SN, 3-Pin SIP

Allegro MicroSystems
955 Perimeter Road
Manchester, NH 03103-3353 U.S.A.
www.allegromicro.com

Revision History

Number	Date	Description
–	February 12, 2020	Advance information release
1	July 24, 2020	Updated Externally Applied Magnetic Flux Density (p. 2), ASIL Safety Current test conditions (p. 4); added Pulse Pre-Low Length characteristic (p. 5); updated Performance Characteristics (p. 6); added Characteristic Plots (p. 8-9); updated Target Design section (p. 11), Figure 8 (p. 13), and Active Area Depth (p. 15).
2	November 18, 2020	Updated status from advance to final release; updated Selection Guide (page 2), Initial Calibration and Tooth-to-Tooth Variation over 1 T_{CYCLE} values (page 6)
3	February 16, 2021	Removed “(pending assessment)” from page 1, due to approved status (effective Jan 2021).
4	March 9, 2023	Added Supply Current Transient characteristic (page 4) and Supply Current Transient section (page 14); updated package drawing (page 16)
5	August 29, 2025	Modified Features and Benefits (page 1), added first direction-pulse output characteristic (page 6), modified Power-On Calibration section (page 11), modified Vibration section (page 12), removed Supply Current Transient section (formerly page 14); and made minor editorial modifications throughout (all pages)

Copyright 2025, Allegro MicroSystems.

Allegro MicroSystems reserves the right to make, from time to time, such departures from the detail specifications as may be required to permit improvements in the performance, reliability, or manufacturability of its products. Before placing an order, the user is cautioned to verify that the information being relied upon is current.

Allegro’s products are not to be used in any devices or systems, including but not limited to life support devices or systems, in which a failure of Allegro’s product can reasonably be expected to cause bodily harm.

The information included herein is believed to be accurate and reliable. However, Allegro MicroSystems assumes no responsibility for its use; nor for any infringement of patents or other rights of third parties which may result from its use.

Copies of this document are considered uncontrolled documents.

For the latest version of this document, visit our website:
www.allegromicro.com

Allegro MicroSystems
955 Perimeter Road
Manchester, NH 03103-3353 U.S.A.
www.allegromicro.com