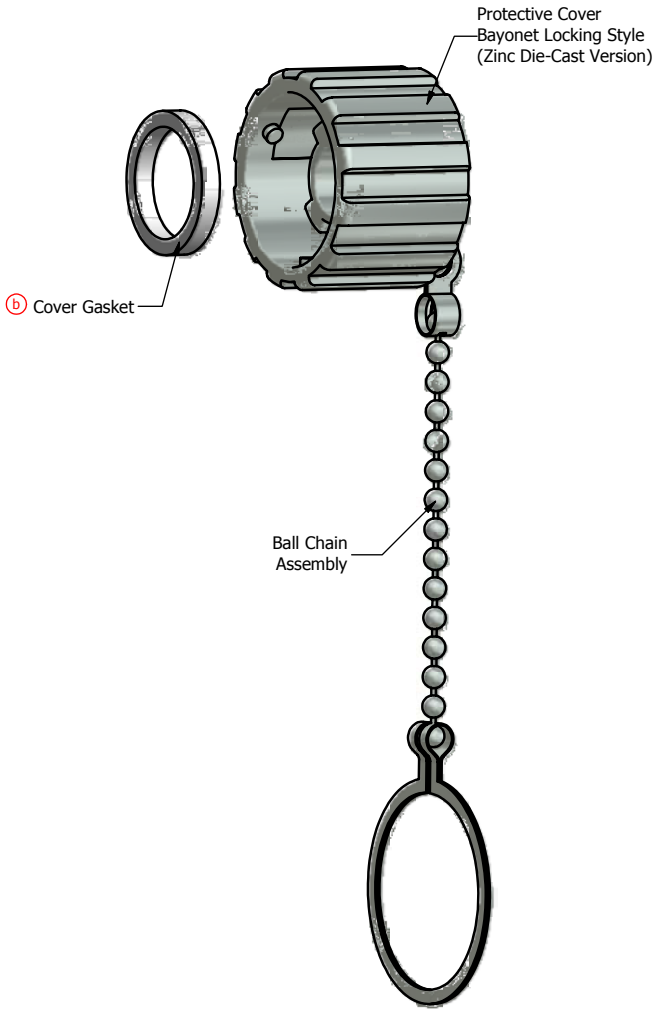

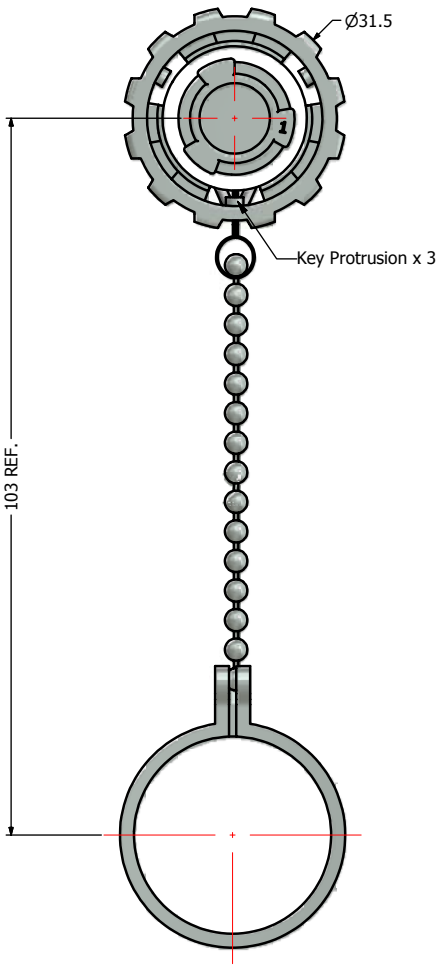

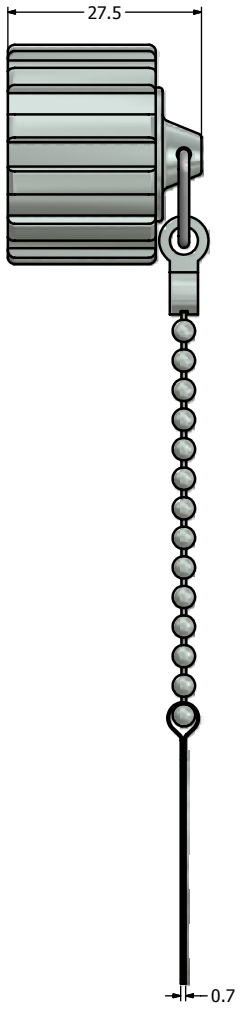

Notes:

1. Material and Finish:
   - Protective Cover: Zinc Die-Cast, Nickel Plated
   - Cover Gasket: Silcon, Color: White
   - Ball Chain Assembly, Copper Alloy and Stainless steel, Nickel Plated
2. Operating Temperature: -40˚C to +85˚C
3. IP67 rated when fully mated with the appropriate connector
4. RoHS compliant

Directive 2002/95/EC RoHS Compliant

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC CORPORATION

DO NOT ALTER CAD DRAWING BY HAND

Rev.	Changes	Date	Name
d	1 x d	Mar/02/2011	Vincent ke
c	3 x c	Dec/16/2010	Vincent ke
b	1 x b	Jan/28/2010	Vincent ke
a	original		

Customer:

Name	Title	Approval Date

Tolerance
Unless otherwise specified
0 PLC ±0.50
1 PLC ±0.38
2 PLC ±0.25
3 PLC ±0.10
ANGLES ±3˚

Autodesk Inventor

	Date	Name
2009		
Draw.	Dec. 07	Vincent Ke
Appd.	Dec. 07	J. Chaudry
Norm		
D-old		

CONEC®

Scale: NTS | Dim. in mm

Material: See Notes

Title: Protective Cover Assembly Kit
with metal ball Chain
Nickel Plated Zinc Die-Cast Version

Drawing No.: 17K1A148 ⓓ | DIN A3

Part No.: 17-101800 | Sheet 1/1