


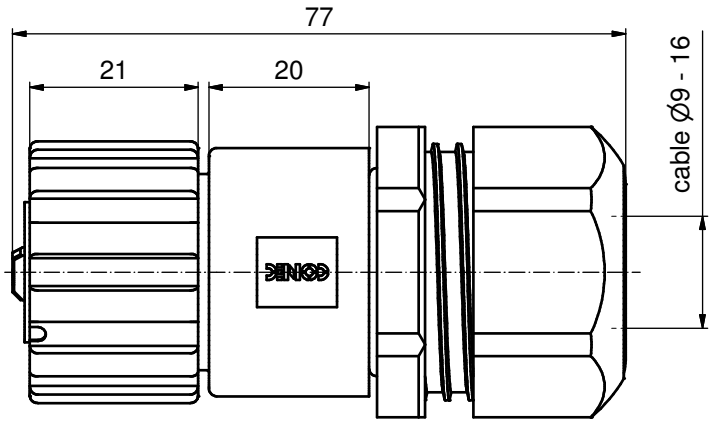





3 CONTACTS WILL BE SUPPLIED LOOSE



STRIPPING DIMENSIONS



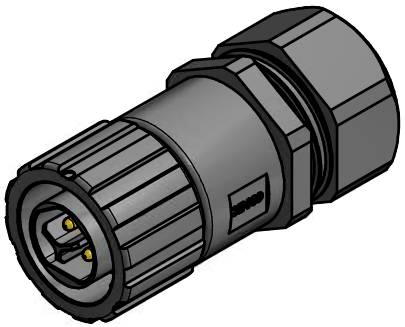

NOTES:

1. MATERIAL AND FINISH:
   - COUPLER RING: PA GF (BLACK); UL94 V-0; UL (f1) RATED
   - SOCKET HOUSING: PA GF (BLACK); UL94 V-0; UL (f1) RATED
   - CABLE GLAND: PA (BLACK), UL94 V-0; UL (f1) RATED
   - CABLE GLAND RUBBER RING: NBR; COLOR: BLACK
   - CABLE FITTING: PA (BLACK); UL94 V-0; UL (f1) RATED
   - INTERFACIAL SEAL: SILICONE; COLOR: WHITE
   - RETAINING RING: STAINLESS STEEL
2. HIGH POWER CONTACTS; CRIMP; 20A
   - FOR USE WITH CABLE AWG 12 - 14
   - MATERIAL: COPPER ALLOY
   - PLATING, MATING AREA: GOLD FLASH OVER NICKEL
   - PLATING, TERMINATION SIDE: 160 - 240µin TIN OVER 80µin NICKEL
     PROTECTION SLEEVE: NICKEL PLATED
   - CONTACTS WILL BE SUPPLIED LOOSE
   - CRIMPING: USE CRIMP TOOL 360X21079X
     WITH TOOL INSERT 36-000430
     TURRET POSITION: 12
     SELECTOR SITTINGS: 8 FOR AWG 12, 7 FOR AWG 14
3. OPERATING TEMPERATURE: -40℃ to +100℃
4. WORKING VOLTAGE: max. 300V AC/DC
5. IP67 RATED WHEN COVERED OR FULLY MATED WITH
   THE APPROPIATE MATING CONNECTOR

RoHS compliant

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH
DO NOT ALTER CAD DRAWING BY HAND

rev.	description	date	name
a	Original		

dim. in mm

	date	name
drawn	30.06.15	Henneboel
appd.	30.06.15	Strakerjahn
norm		
d-old		

scale: 1,5:1
material: see notes

title:
IP67 POWER BAYONET 3pos.
PLUG KIT / CRIMP
cable mount Ø 9-16mm

dwg no: 17K1A469
DIN-A3
sh: 1

part no: 17-400463