TS187x, TS187xA

1.8 V input/output, rail-to-rail, low power operational amplifiers

Datasheet — production data

Features

- Operating range from V_{CC} = 1.8 to 6 V
- Rail-to-rail input and output
- Extended V_{icm} (V_{CC-} - 0.2 V to V_{CC+} + 0.2 V)
- Low supply current (400 µA)
- Gain bandwidth product (1.6 MHz)
- High unity gain stability
- ESD tolerance (2 kV)
- Latch-up immunity
- Available in
  - SOT23-5 micropackage
  - MiniSO-8, SO-8, SO-14
  - TSSOP8, TSSOP14 package

Applications

- Battery powered applications (toys)
- Portable communication devices (cell phones)
- Audio drivers (headphone drivers)
- Laptop/notebook computers


Description

The TS187x (single, dual and quad) device can operate with voltages as low as 1.8 V. They feature both input and output rail-to-rail.


The common mode input voltage extends 200 mV beyond the supply voltages at 25 °C, while the output voltage swing is within 100 mV of each rail with a 600 Ω load resistor. The devices consume typically 400 µA per channel while offering 1.6 MHz of gain bandwidth product. The amplifiers provide a high output drive capability at typically 65 mA loads.

These features make the TS187x family ideal for sensor interface, battery supplied and portable applications.


TS1871ILT



TS1871ID/IDT

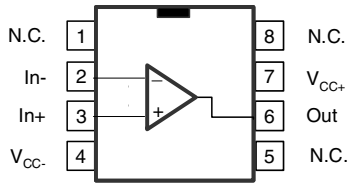

TS1872ID/IDT-TS1872IST-TS1872IPT



TS1874ID/IDT-TS1874IPT




Table 1. Device summary

Reference	Single version	Dual version	Quad version
TS187x	TS1871	TS1872	TS1874
TS187xA	TS1871A	TS1872A	TS1874A

This is information on a product in full production. www.st.com

Contents

1 Absolute maximum ratings and operating conditions 3

2 Electrical characteristics 5

3 Package information 16

3.1 SO-8 package information 17

3.2 TSSOP8 package information 18

3.3 MiniSO-8 package information 19

3.4 SO-14 package information 20

3.5 TSSOP14 package information 21

3.6 SOT23-5 package information 22

4 Ordering information 23

5 Revision history 24

1 Absolute maximum ratings and operating conditions

Table 2. Absolute maximum ratings

Symbol	Parameter	Value	Unit
V_{CC}	Supply voltage(1)	7	V
V_{id}	Differential input voltage(2)	±1	V
V_{in}	Input voltage	V_{CC-} -0.3 to V_{CC+} +0.3	V
T_{stg}	Storage temperature	-65 to +150	°C
T_j	Maximum junction temperature	150	°C
R_{thja}	Thermal resistance junction-to-ambient(3) SOT23-5 MiniSO-8 SO-8 SO-14 TSSOP8 TSSOP14	 250 190 125 103 120 100	°C/W
R_{thjc}	Thermal resistance junction-to-case SOT23-5 MiniSO-8 SO-8 SO-14 TSSOP8 TSSOP14	 81 39 40 31 37 32	°C/W
ESD	HBM: human body model(4)	2	kV
	MM: machine model(5)	200	V
	CDM: charged device model(6)	1.5	kV
	Latch-up immunity	200	mA
	Lead temperature (soldering, 10 sec.)	250	°C
	Output short-circuit duration	See(7)	

1. All voltage values, except differential voltage, are with respect to network terminal.
2. Differential voltages are the non-inverting input terminal with respect to the inverting input terminal. If V_{id} > ±1 V, the maximum input current must not exceed ±1 mA. When V_{id} > ±1 V, add an input series resistor to limit the input current.
3. Short-circuits can cause excessive heating. Destructive dissipation can result from simultaneous short-circuits on all amplifiers.
4. Human body model: a 100 pF capacitor is charged to the specified voltage, then discharged through a 1.5 kΩ resistor between two pins of the device. This is done for all couples of connected pin combinations while the other pins are floating.
5. Machine model: a 200 pF capacitor is charged to the specified voltage, then discharged directly between two pins of the device with no external series resistor (internal resistor < 5 Ω). This is done for all couples of connected pin combinations while the other pins are floating.
6. Charged device model: all pins and package are charged together to the specified voltage and then discharged directly to ground through only one pin. This is done for all pins.
7. Short-circuits from the output to V_{CC} can cause excessive heating. The maximum output current is approximately 80 mA, independent of the magnitude of V_{CC}. Destructive dissipation can result from simultaneous short-circuits on all amplifiers.

Table 3. Operating conditions

Symbol	Parameter	Value	Unit
V_{CC}	Supply voltage	1.8 to 6	V
V_{icm}	Common-mode input voltage range T_{oper} = 25 °C, 1.8 ≤ V_{CC} ≤ 6 V T_{min} < T_{oper} < T_{max}, 1.8 ≤ V_{CC} ≤ 6 V	V_{CC-} - 0.2 to V_{CC+} + 0.2 V_{CC-} to V_{CC+}	V
T_{oper}	Operating free air temperature range	-40 to + 125	°C

2 Electrical characteristics

Table 4. Electrical characteristics measured at V_{CC+} = +1.8 V with V_{CC-} = 0 V, C_L and R_L connected to $V_{CC}/2$, and T_{amb} = 25 °C (unless otherwise specified)(1)

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
V_{io}	Input offset voltage	$V_{icm} = V_{out} = V_{CC}/2$ TS1871A/2A/4A $T_{min} \le T_{amb} \le T_{max}$ TS1871/2/4 $T_{min} \le T_{amb} \le T_{max}$		 0.1	 1 1.5 3 6	mV
ΔV_{io}	Input offset voltage drift			2		µV/°C
I_{io}	Input offset current	$V_{icm} = V_{out} = V_{CC}/2$(2) $T_{min} \le T_{amb} \le T_{max}$		3	30 60	nA
I_{ib}	Input bias current	$V_{icm} = V_{out} = V_{CC}/2$(2) $T_{min} \le T_{amb} \le T_{max}$		40	125 150	nA
CMR	Common mode rejection ratio 20 log ($\Delta V_{ic}/\Delta V_{io}$)	$0 \le V_{icm} \le V_{CC}$, $V_{out} = V_{CC}/2$ $T_{min} \le T_{amb} \le T_{max}$	55 52	77		dB
A_{vd}	Large signal voltage gain	V_{out} = 0.5 to 1.3 V R_L = 2 kΩ R_L = 600 Ω	 77 70	 91 84		dB
V_{OH}	High level output voltage	V_{id} = 100 mV R_L = 2 kΩ R_L = 600 Ω $T_{min} \le T_{amb} \le T_{max}$, R_L = 2 kΩ $T_{min} \le T_{amb} \le T_{max}$, R_L = 600 Ω	 1.65 1.62 1.65 1.62	 1.77 1.74		V
V_{OL}	Low level output voltage	V_{id} = -100 mV R_L = 2 kΩ R_L = 600 Ω $T_{min} \le T_{amb} \le T_{max}$, R_L = 2 kΩ $T_{min} \le T_{amb} \le T_{max}$, R_L = 600 Ω		 30 46	 100 150 100 150	mV
I_o	Output source current	V_{id} = 100 mV, $V_O = V_{CC-}$	20	58		mA
	Output sink current	V_{id} = -100 mV, $V_O = V_{CC+}$	20	68		
I_{CC}	Supply current (per amplifier)	$V_{out} = V_{CC}/2$ A_{VCL} = 1, no load $T_{min} \le T_{amb} \le T_{max}$		400	560 600	µA
GBP	Gain bandwidth product	R_L = 10 kΩ, C_L = 100 pF, f = 100 kHz	0.9	1.6		MHz
SR	Slew rate	R_L = 10 kΩ, C_L = 100 pF, A_V = 1	0.38	0.54		V/µs
ϕm	Phase margin	C_L = 100 pF		53		Degrees
e_n	Input voltage noise	f = 1 kHz		27		nV/√Hz
THD	Total harmonic distortion			0.01		%

1. All parameter limits at temperatures different from 25 °C are guaranteed by correlation.
2. Maximum values include unavoidable inaccuracies of the industrial tests.

Table 5. Electrical characteristics measured at V_{CC} = +3 V with V_{CC-} = 0 V, C_L and R_L connected to $V_{CC}/2$, and T_{amb} = 25 °C (unless otherwise specified)(1)

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
V_{io}	Input offset voltage	$V_{icm} = V_{out} = V_{CC}/2$ TS1871A/2A/4A $T_{min} \le T_{amb} \le T_{max}$ TS1871/2/4 $T_{min} \le T_{amb} \le T_{max}$		0.1	1 1.5 3 6	mV
ΔV_{io}	Input offset voltage drift			2		µV/°C
I_{io}	Input offset current	$V_{icm} = V_{out} = V_{CC}/2$(2) $T_{min} \le T_{amb} \le T_{max}$		3	30 60	nA
I_{ib}	Input bias current	$V_{icm} = V_{out} = V_{CC}/2$(2) $T_{min} \le T_{amb} \le T_{max}$		4	125 150	nA
CMR	Common mode rejection ratio 20 log ($\Delta V_{ic}/\Delta V_{io}$)	$0 \le V_{icm} \le V_{CC}$, $V_{out} = V_{CC}/2$ $T_{min} \le T_{amb} \le T_{max}$	60 57	80		dB
A_{vd}	Large signal voltage gain	V_{out} = 0.5 to 2.5 V R_L = 2 kΩ R_L = 600 Ω	80 74	94 88		dB
V_{OH}	High level output voltage	V_{id} = 100 mV R_L = 2 kΩ R_L = 600 Ω $T_{min} \le T_{amb} \le T_{max}$, R_L = 2 kΩ $T_{min} \le T_{amb} \le T_{max}$, R_L = 600 Ω	2.82 2.80 2.82 2.80	2.95 2.95		V
V_{OL}	Low level output voltage	V_{id} = -100 mV R_L = 2 kΩ R_L = 600 Ω $T_{min} \le T_{amb} \le T_{max}$, R_L = 2 kΩ $T_{min} \le T_{amb} \le T_{max}$, R_L = 600 Ω		39 58	120 160 120 160	mV
I_o	Output source current	V_{id} = 100 mV, $V_O = V_{CC-}$	20	60		mA
	Output sink current	V_{id} = -100 mV, $V_O = V_{CC+}$	20	70		
I_{CC}	Supply current (per amplifier)	$V_{out} = V_{CC}/2$ A_{VCL} = 1, no load $T_{min} \le T_{amb} \le T_{max}$		450	650 690	µA
GBP	Gain bandwidth product	R_L = 10 kΩ, C_L = 100 pF, f = 100 kHz	1	1.7		MHz
SR	Slew rate	R_L = 10 kΩ, C_L = 100 pF, A_V = 1	0.42	0.6		V/µs
ϕm	Phase margin	C_L = 100 pF		53		Degrees
e_n	Input voltage noise	f = 1 kHz		27		nV/√Hz
THD	Total harmonic distortion			0.01		%

1. All parameter limits at temperatures different from 25 °C are guaranteed by correlation.
2. Maximum values include unavoidable inaccuracies of the industrial tests.

Table 6. Electrical characteristics measured at V_{CC} = +5 V with V_{CC-} = 0 V, C_L and R_L connected to $V_{CC}/2$, and T_{amb} = 25 °C (unless otherwise specified)(1)

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
V_{io}	Input offset voltage	$V_{icm} = V_{out} = V_{CC}/2$ TS1871A/2A/4A $T_{min} \le T_{amb} \le T_{max}$ TS1871/2/4 $T_{min} \le T_{amb} \le T_{max}$		 0.1	1 1.5 3 6	mV
ΔV_{io}	Input offset voltage drift			2		µV/°C
I_{io}	Input offset current	$V_{icm} = V_{out} = V_{CC}/2$(2) $T_{min} \le T_{amb} \le T_{max}$		3	30 60	nA
I_{ib}	Input bias current	$V_{icm} = V_{out} = V_{CC}/2$(2) $T_{min} \le T_{amb} \le T_{max}$		70	130 150	nA
CMR	Common mode rejection ratio 20 log ($\Delta V_{ic}/\Delta V_{io}$)	$0 \le V_{icm} \le V_{CC}$, V_{out} not equal to $V_{CC}/2$ $T_{min} \le T_{amb} \le T_{max}$	65 62	85		dB
SVR	Supply voltage rejection ratio 20 log ($\Delta V_{cc}/\Delta V_{io}$)	V_{CC} = 1.8 to 5 V	70	90		dB
A_{vd}	Large signal voltage gain	V_{out} = 1 to 4 V R_L = 2 kΩ R_L = 600 Ω	 83 77	 97 91		dB
V_{OH}	High level output voltage	V_{id} = 100 mV R_L = 2 kΩ R_L = 600 Ω $T_{min} \le T_{amb} \le T_{max}$, R_L = 2 kΩ $T_{min} \le T_{amb} \le T_{max}$, R_L = 600 Ω	 4.80 4.75 4.80 4.75	 4.95 4.90		V
V_{OL}	Low level output voltage	V_{id} = -100 mV R_L = 2 kΩ R_L = 600 Ω $T_{min} \le T_{amb} \le T_{max}$, R_L = 2 kΩ $T_{min} \le T_{amb} \le T_{max}$, R_L = 600 Ω		 52 70	 130 188 130 188	mV
I_o	Output source current	V_{id} = 100 mV, $V_O = V_{CC-}$	20	65		mA
	Output sink current	V_{id} = -100 mV, $V_O = V_{CC+}$	20	80		
I_{CC}	Supply current (per amplifier)	$V_{out} = V_{CC}/2$ A_{VCL} = 1, no load $T_{min} \le T_{amb} \le T_{max}$		500	835 875	µA
GBP	Gain bandwidth product	R_L = 10 kΩ, C_L = 100 pF, f = 100 kHz	1	1.8		MHz
SR	Slew rate	R_L = 10 kΩ, C_L = 100 pF, A_V = 1	0.42	0.6		V/µs
ϕm	Phase margin	C_L = 100 pF		55		Degrees
e_n	Input voltage noise	f = 1 kHz		27		nV/√Hz
THD	Total harmonic distortion			0.01		%

1. All parameter limits at temperatures different from 25 °C are guaranteed by correlation.
2. Maximum values include unavoidable inaccuracies of the industrial tests.

Figure 1. Input offset voltage distribution

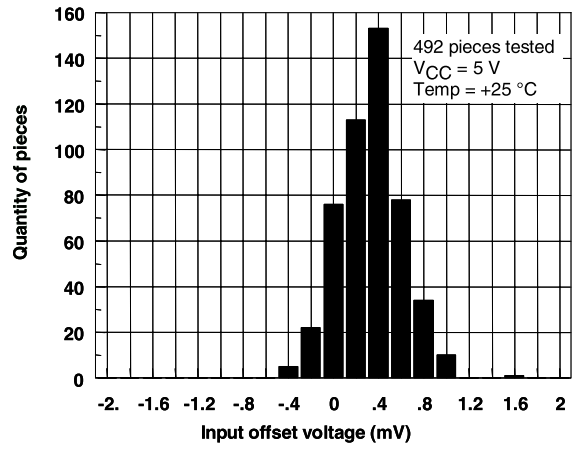


Figure 2. Input offset voltage vs. temperature

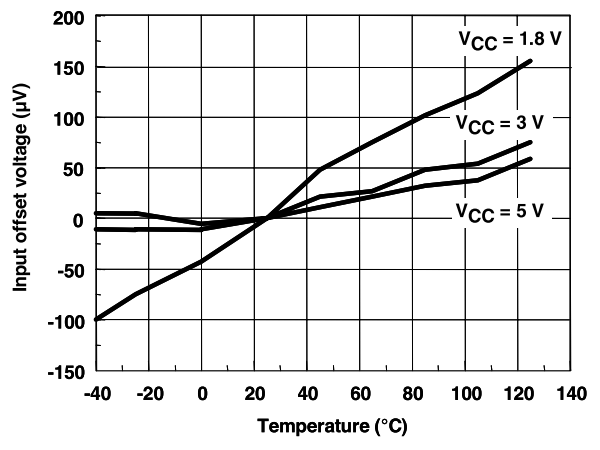


Figure 3. Input bias current vs. temperature at V_{CC} = 1.8 V

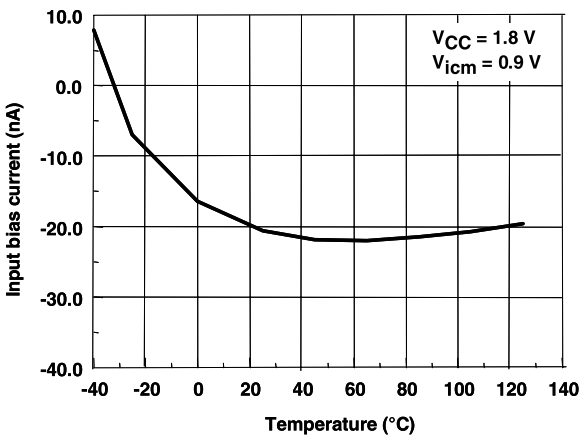


Figure 4. Input bias current vs. temperature at V_{CC} = 3 V

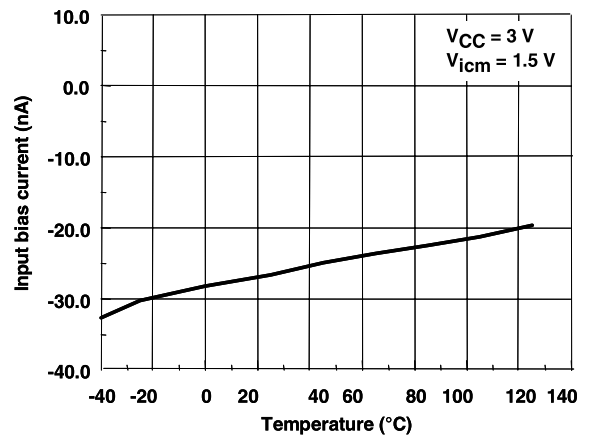


Figure 5. Supply current/amplifier vs. supply voltage

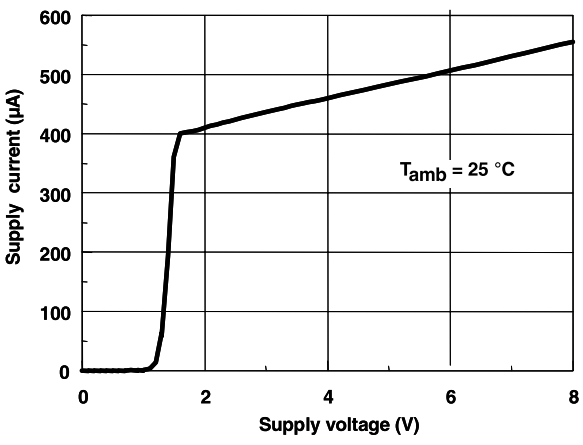


Figure 6. Supply current/amplifier vs. temperature

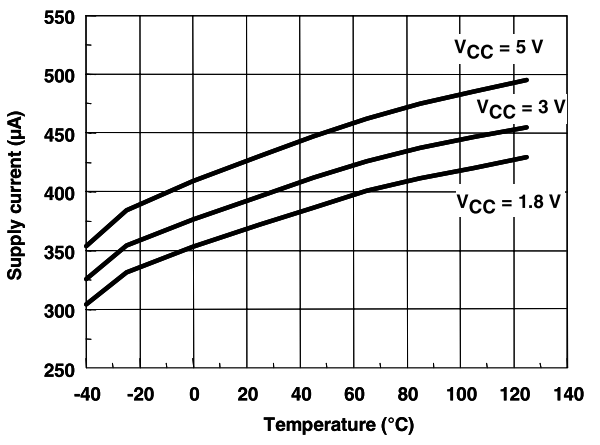


Figure 7. Common mode rejection vs. temperature

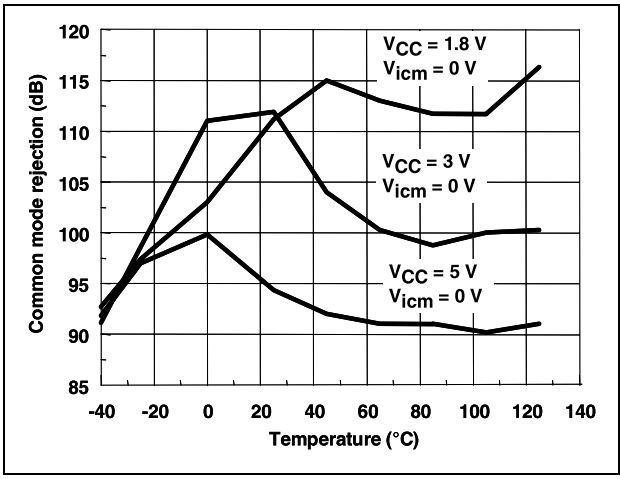


Figure 8. Supply voltage rejection vs. temperature at V_{CC} = 1.8 V

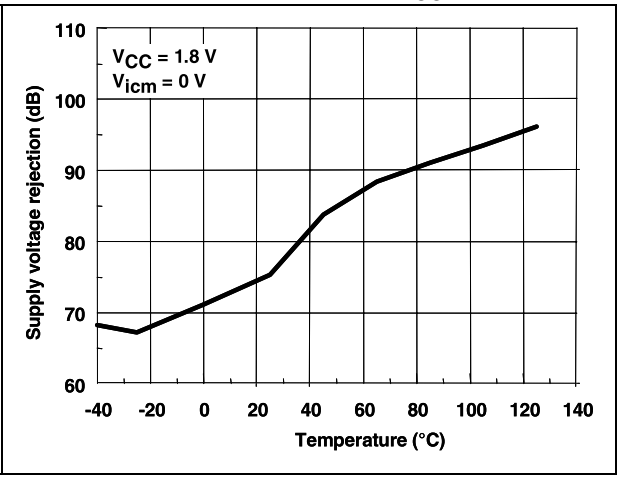


Figure 9. Supply voltage rejection vs. temperature at V_{CC} = 3 V

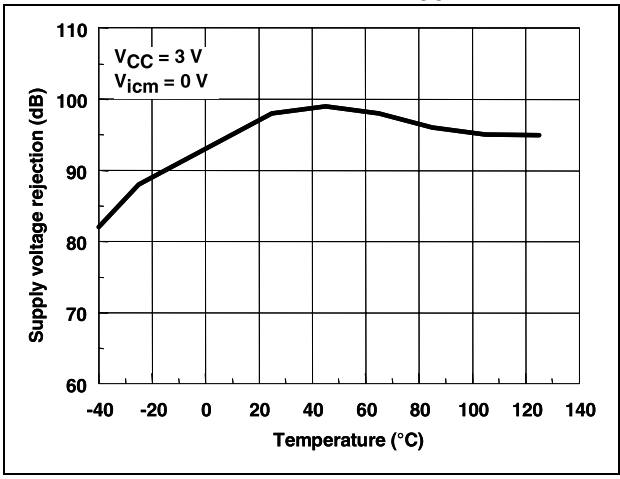


Figure 10. Supply voltage rejection vs. temperature at V_{CC} = 5 V

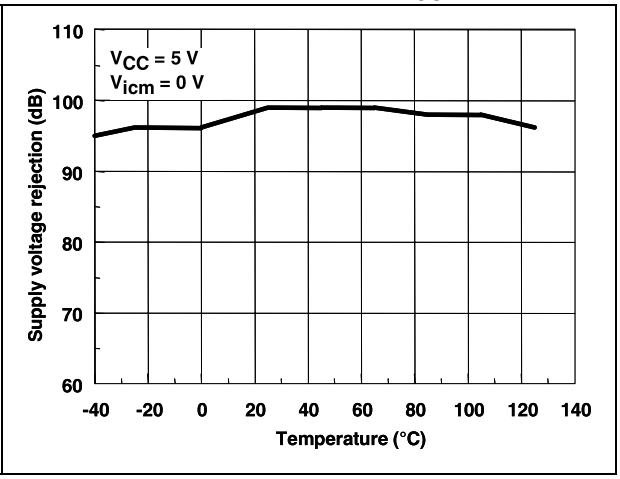


Figure 11. Power supply voltage rejection vs. frequency

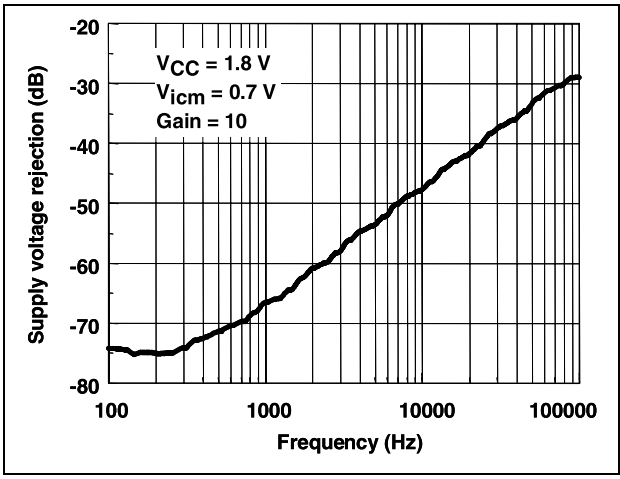


Figure 12. Open loop gain vs. temperature at V_{CC} = 1.8 V

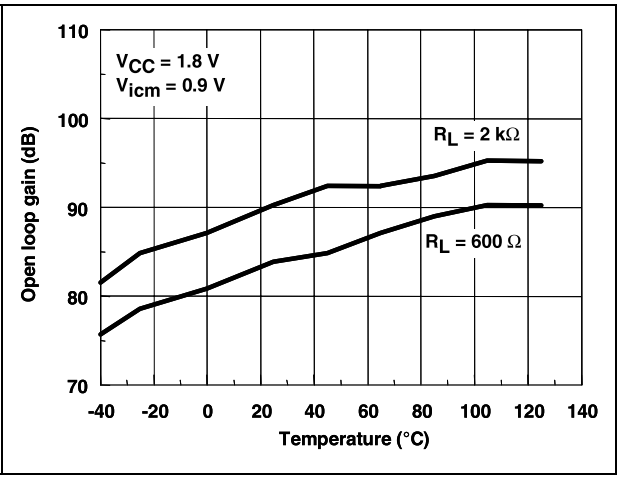


Figure 13. Open loop gain vs. temperature at V_{CC} = 3 V

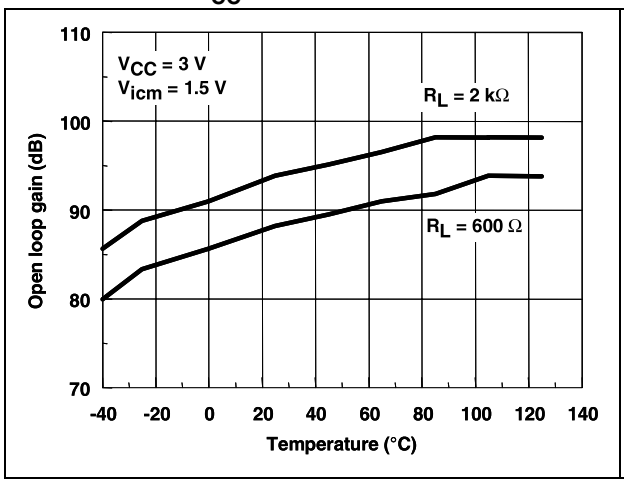


Figure 14. Open loop gain vs. temperature at V_{CC} = 5 V

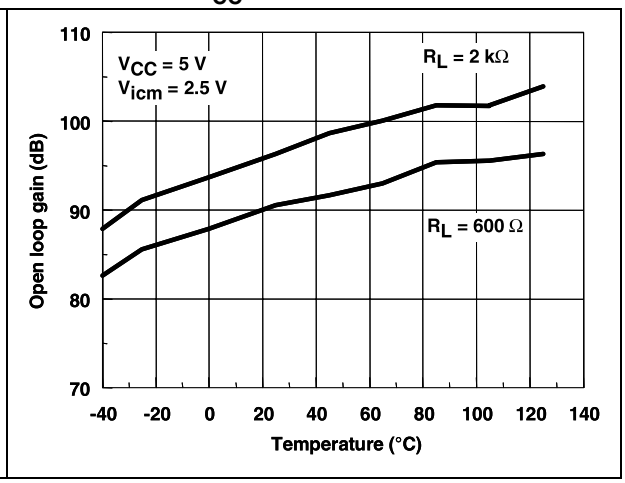


Figure 15. High level output voltage vs. temperature, R_L = 600 Ω

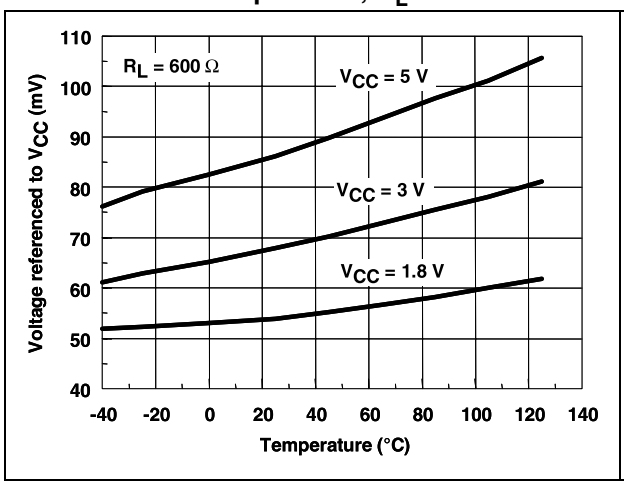


Figure 16. Low level output voltage vs. temperature, R_L = 600 Ω

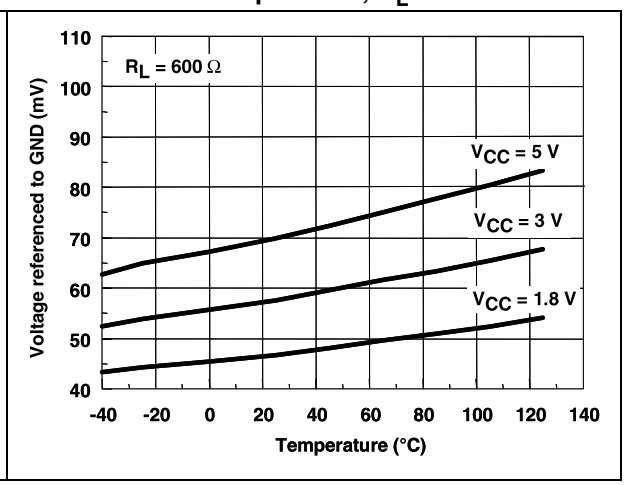


Figure 17. High level output voltage vs. temperature, R_L = 2 kΩ

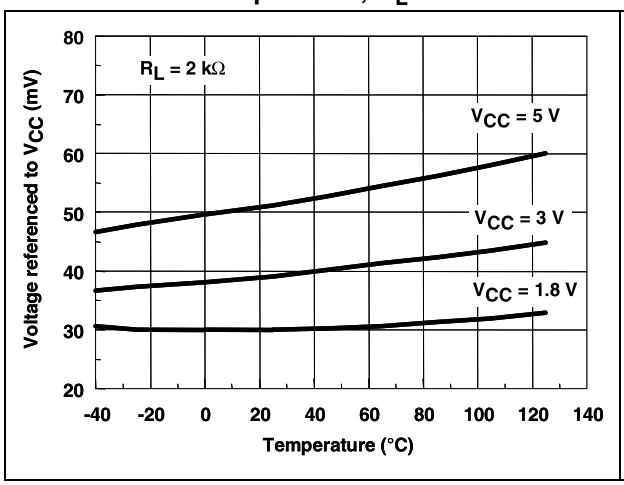


Figure 18. Low level output voltage vs. temperature, R_L = 2 kΩ

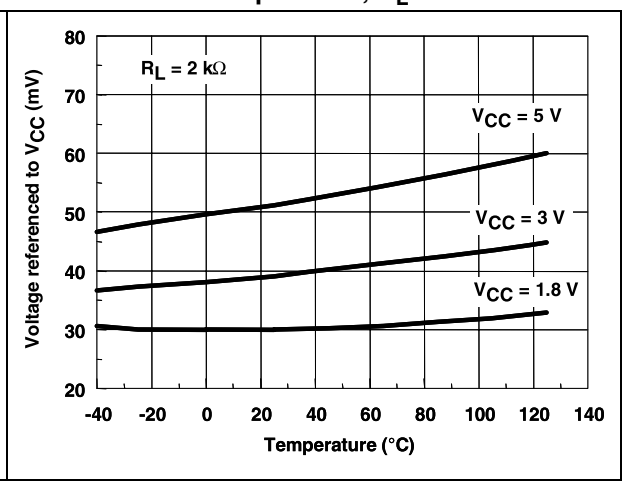


Figure 19. Output current vs. temperature at V_{CC} = 1.8 V

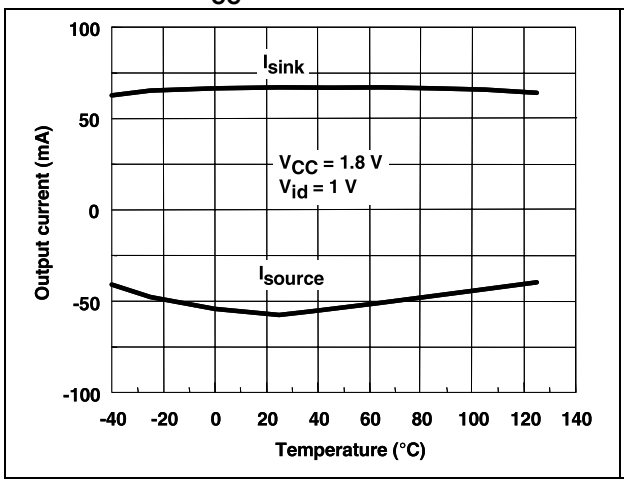


Figure 20. Output current vs. temperature at V_{CC} = 3 V

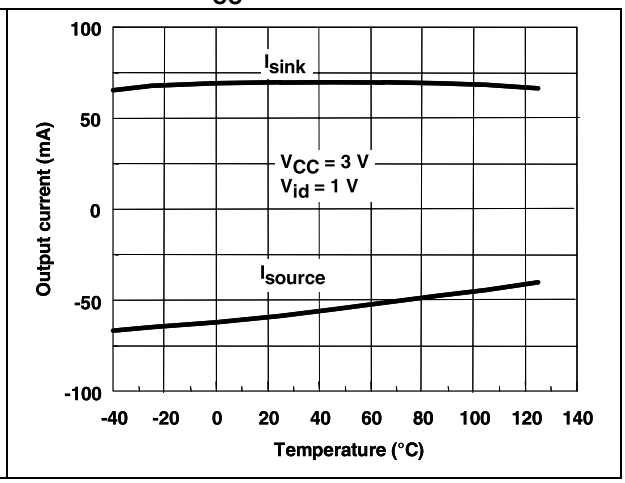


Figure 21. Output current vs. temperature at V_{CC} = 5 V

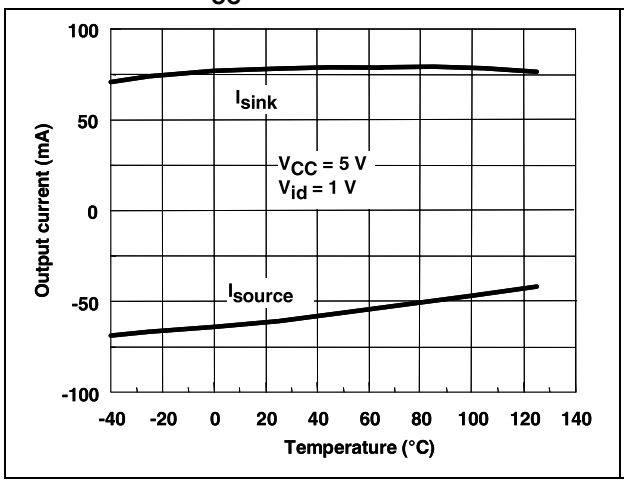


Figure 22. Output current vs. output voltage at V_{CC} = 1.8 V

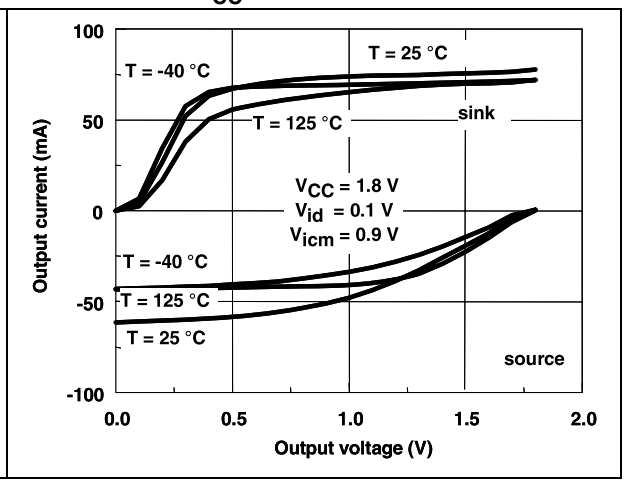


Figure 23. Output current vs. output voltage at V_{CC} = 3 V

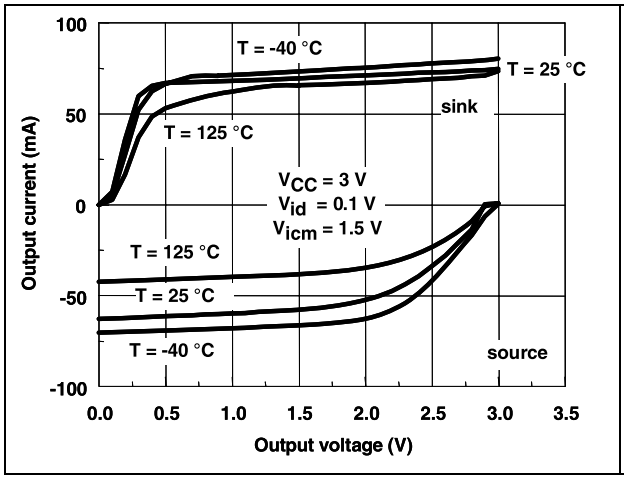


Figure 24. Output current vs. output voltage at V_{CC} = 5 V

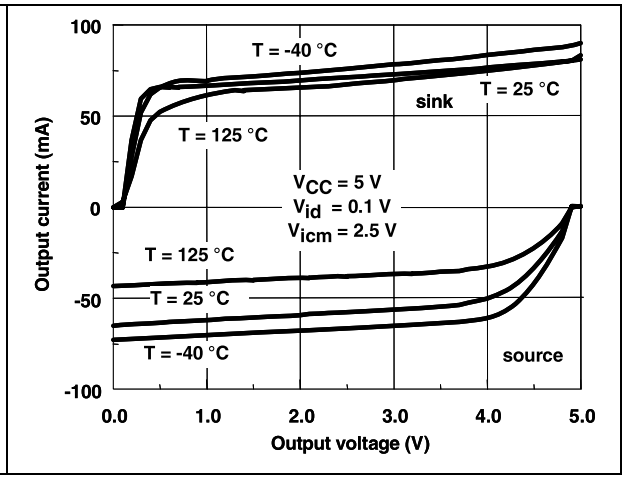


Figure 25. Gain and phase vs. frequency at V_{CC} = 1.8 V

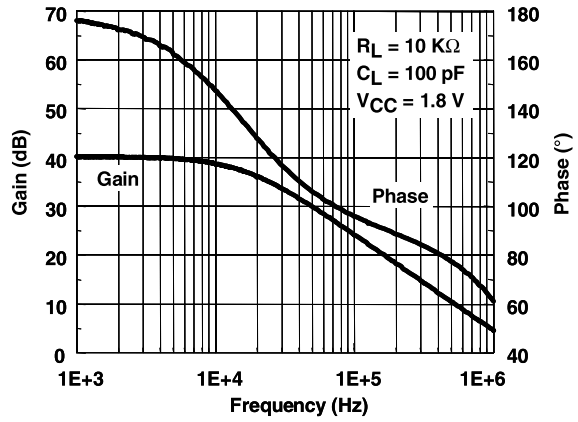


Figure 26. Gain and phase vs. frequency at V_{CC} = 3 V

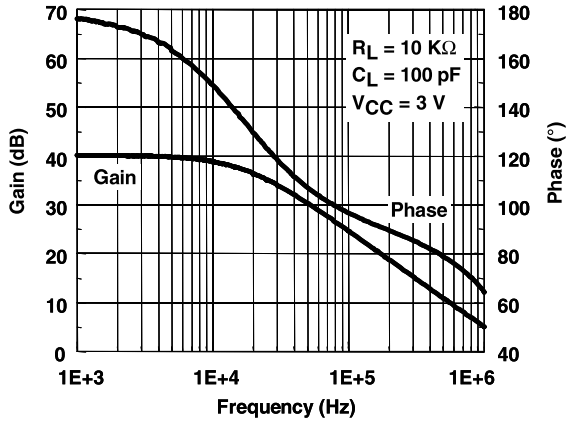


Figure 27. Gain and phase vs. frequency at V_{CC} = 5 V

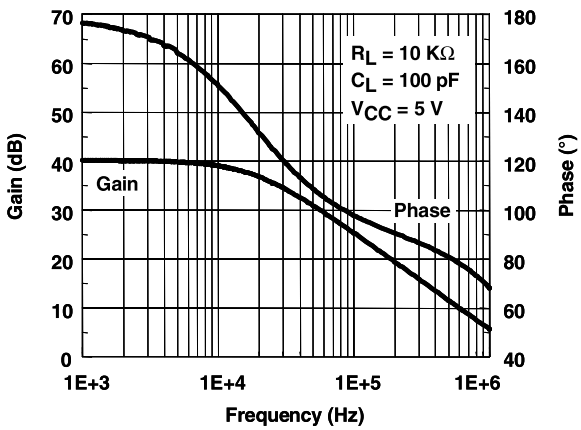


Figure 28. Gain bandwidth product vs. temperature

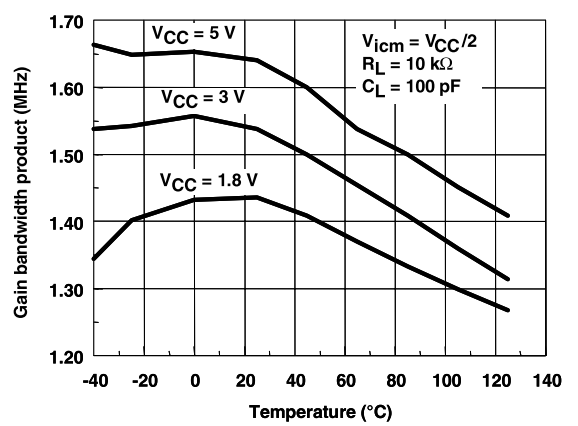


Figure 29. Gain bandwidth product vs. supply voltage

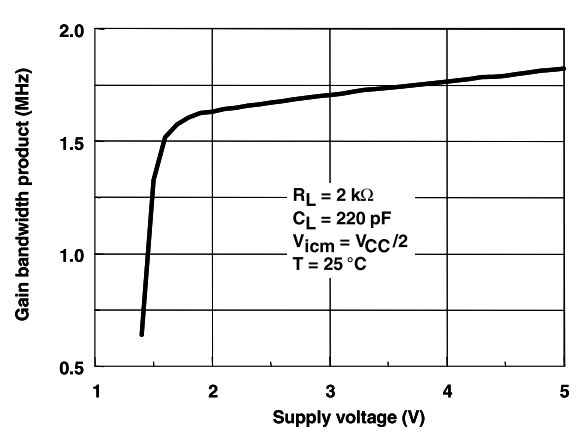


Figure 30. Slew rate vs. temperature at V_{CC} = 1.8 V

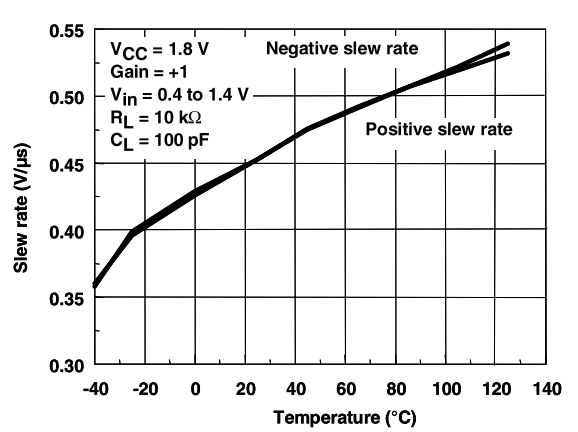


Figure 31. Slew rate vs. temperature at V_{CC} = 3 V

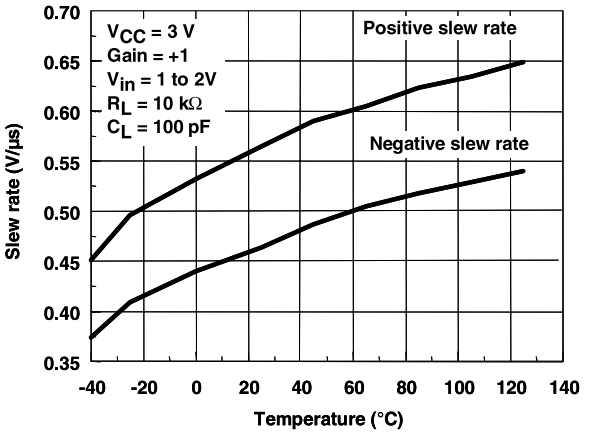


Figure 32. Slew rate vs. temperature at V_{CC} = 5 V

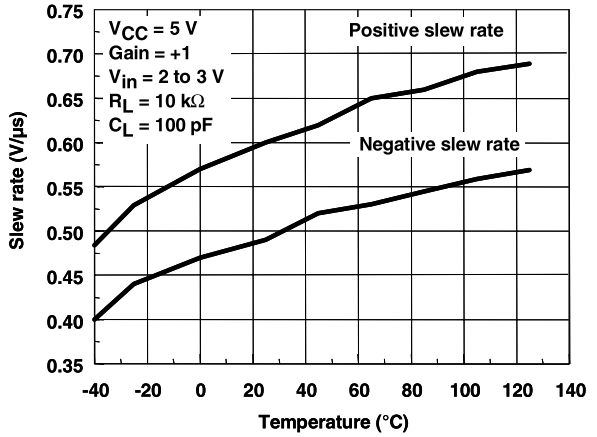


Figure 33. Phase margin vs. load capacitor

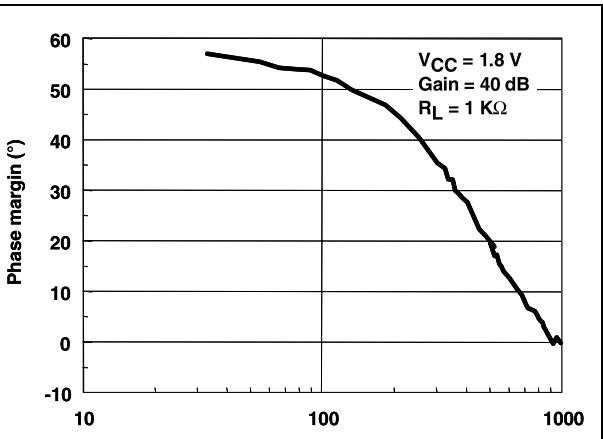


Figure 34. Phase margin vs. output current

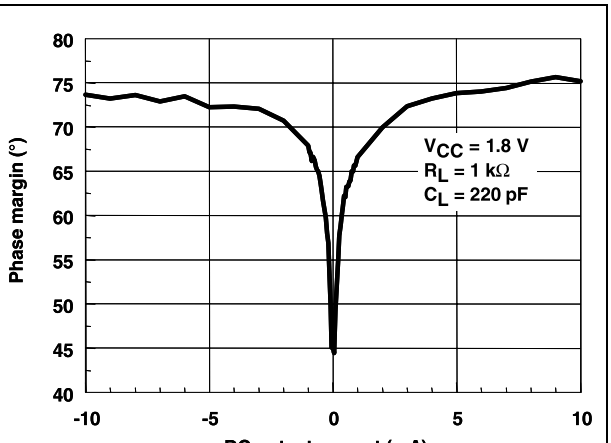


Figure 35. Gain margin vs. output current

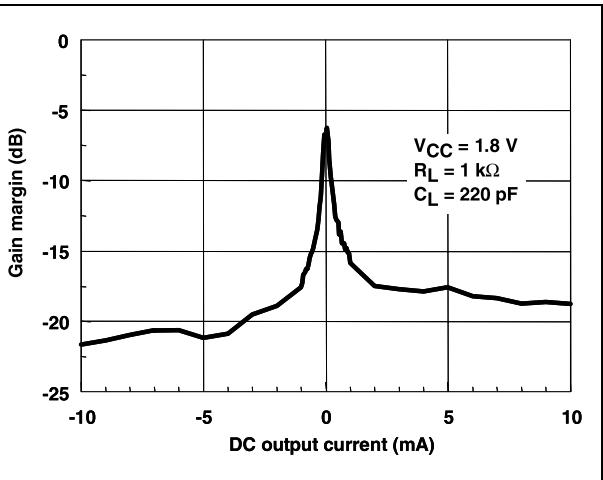


Figure 36. Equivalent input noise vs. frequency

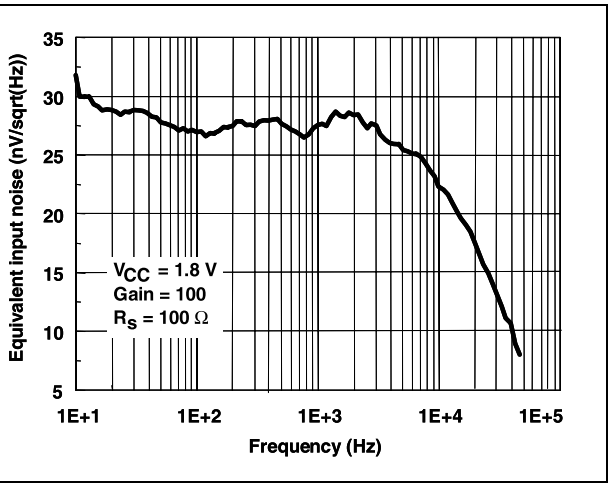


Figure 37. Distortion vs. output voltage at V_{CC} = 1.8 V

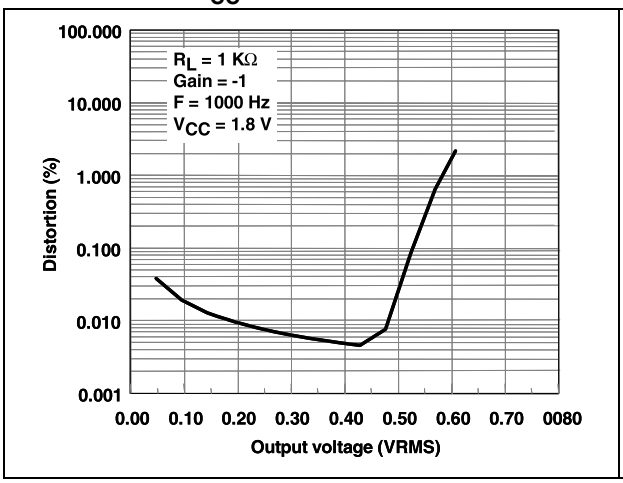


Figure 38. Distortion vs. output voltage at V_{CC} = 3 V

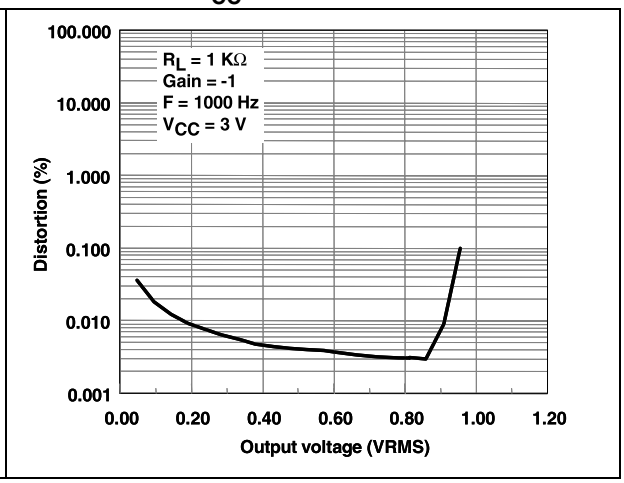


Figure 39. Distortion vs. output voltage at V_{CC} = 5 V

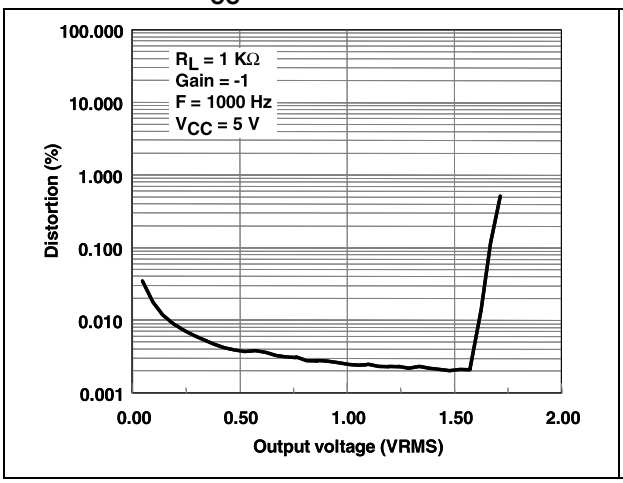


Figure 40. Distortion vs. output voltage at V_{CC} = 2.7 V, R_L = 150 Ω

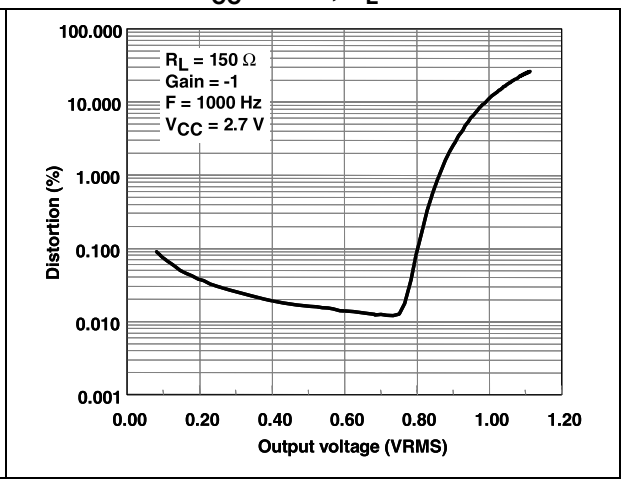


Figure 41. Distortion vs. output voltage at V_{CC} = 2.7 V, R_L = 1500 Ω

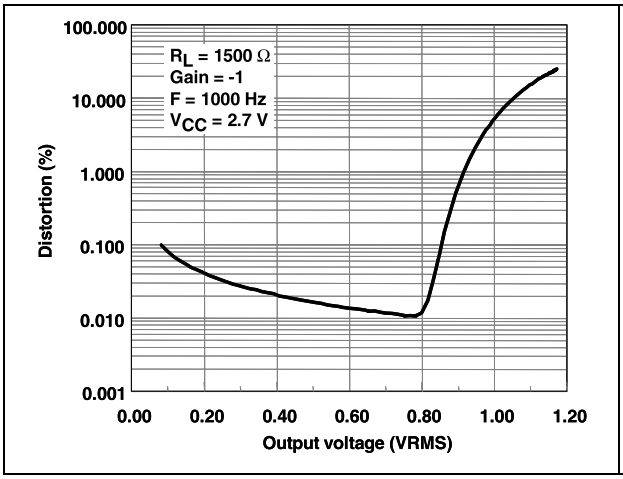


Figure 42. Distortion vs. output voltage at V_{CC} = 2.7 V, R_L = 4700 Ω

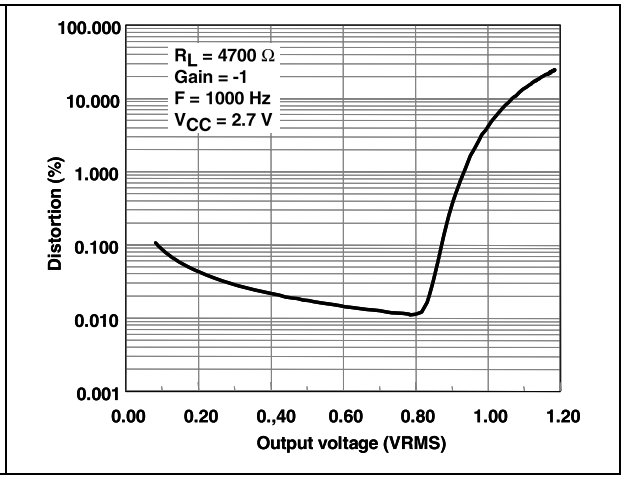


Figure 43. Distortion vs. frequency at V_{CC} = 1.8 V

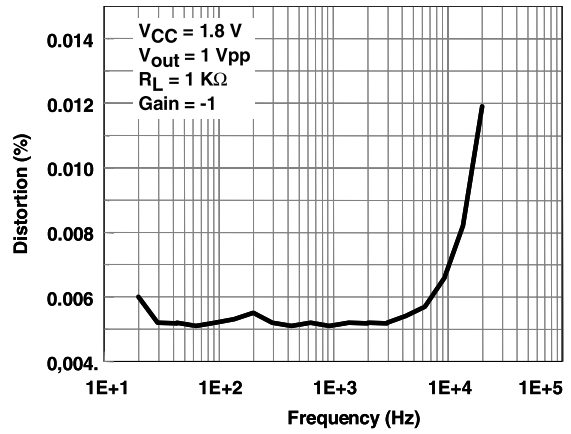


Figure 44. Distortion vs. frequency at V_{CC} = 3 V

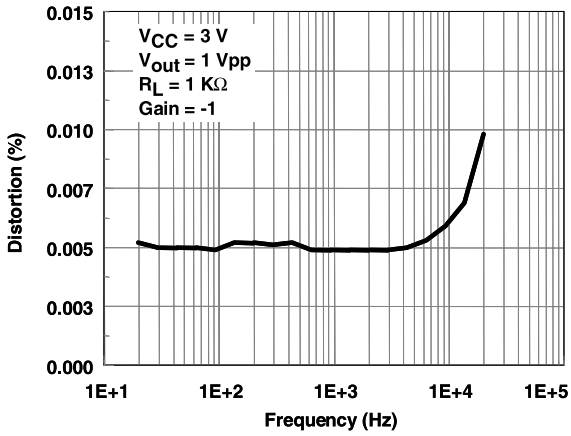


Figure 45. Distortion vs. frequency at V_{CC} = 1.8 V, R_L = 32 Ω

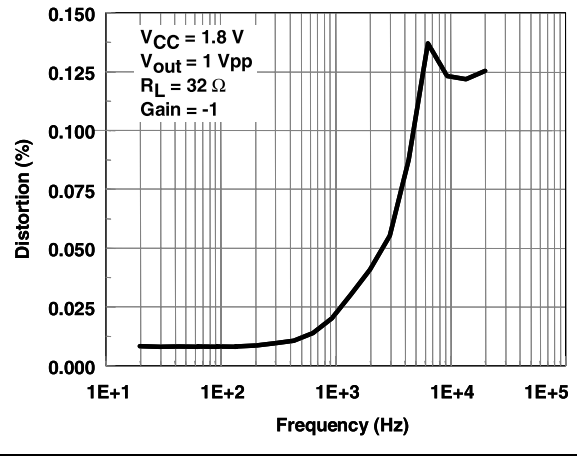


Figure 46. Distortion vs. frequency at V_{CC} = 3 V, R_L = 32 Ω

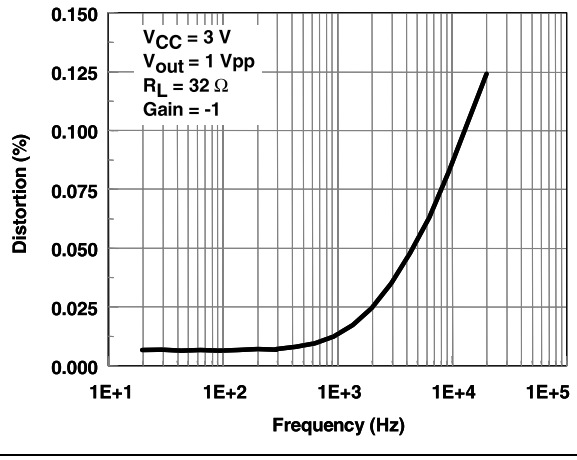


Figure 47. Output power vs. supply voltage


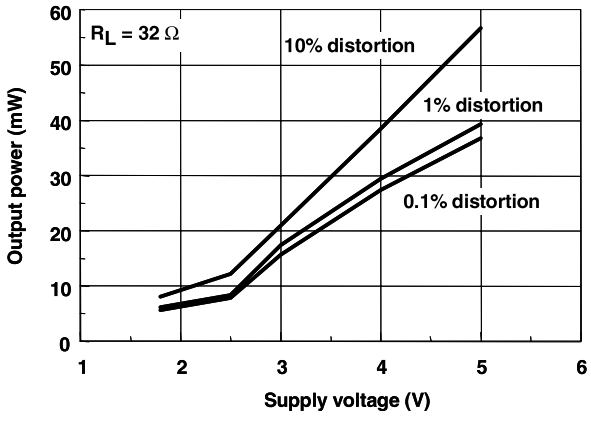


Figure 48. Common mode rejection ratio vs. frequency at V_{CC} = 5 V

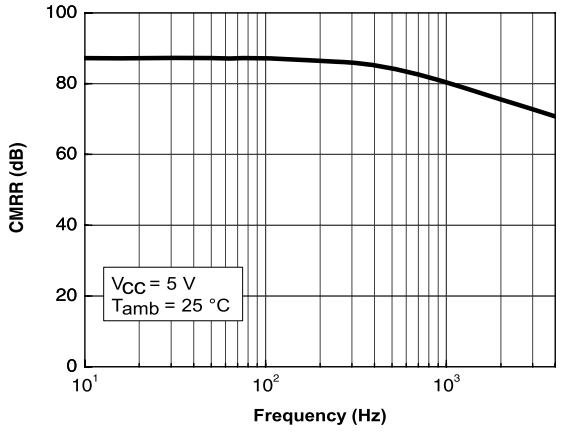

3 Package information

In order to meet environmental requirements, ST offers these devices in different grades of ECOPACK® packages, depending on their level of environmental compliance. ECOPACK specifications, grade definitions and product status are available at: *www.st.com*. ECOPACK is an ST trademark.

3.1 SO-8 package information

Figure 49. SO-8 package outline

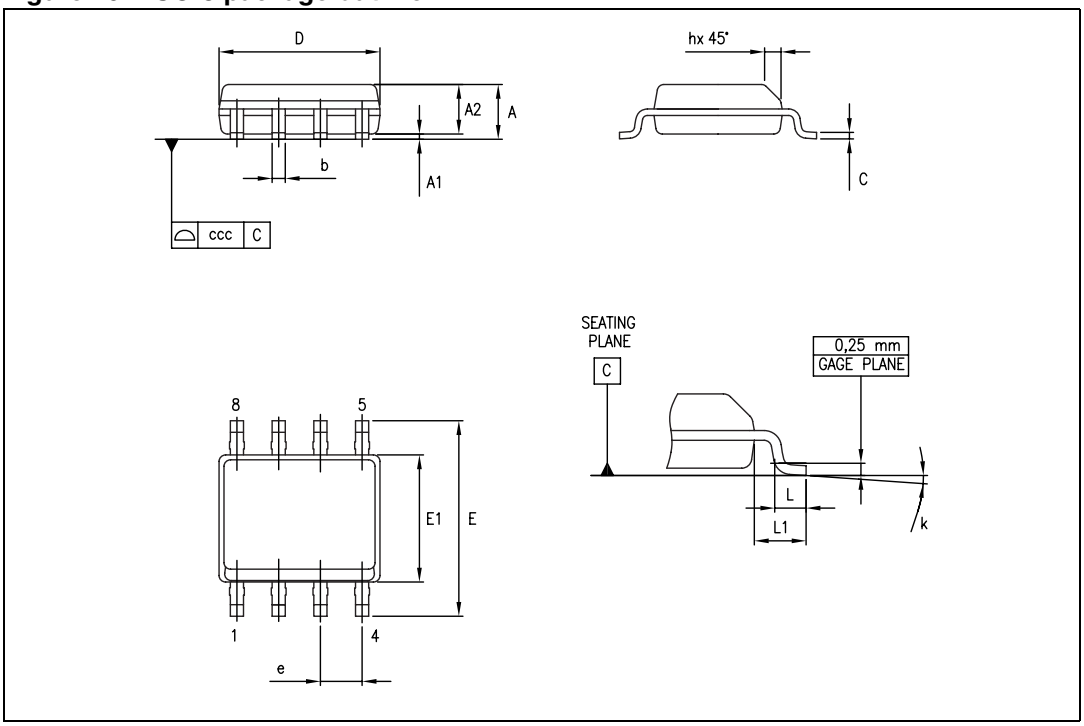


Table 7. SO-8 package mechanical data

Symbol	Dimensions					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A			1.75			0.069
A1	0.10		0.25	0.004		0.010
A2	1.25			0.049		
b	0.28		0.48	0.011		0.019
c	0.17		0.23	0.007		0.010
D	4.80	4.90	5.00	0.189	0.193	0.197
E	5.80	6.00	6.20	0.228	0.236	0.244
E1	3.80	3.90	4.00	0.150	0.154	0.157
e		1.27			0.050	
h	0.25		0.50	0.010		0.020
L	0.40		1.27	0.016		0.050
L1		1.04			0.040	
k	1°		8°	1°		8°
ccc			0.10			0.004

3.2 TSSOP8 package information

Figure 50. TSSOP8 package outline

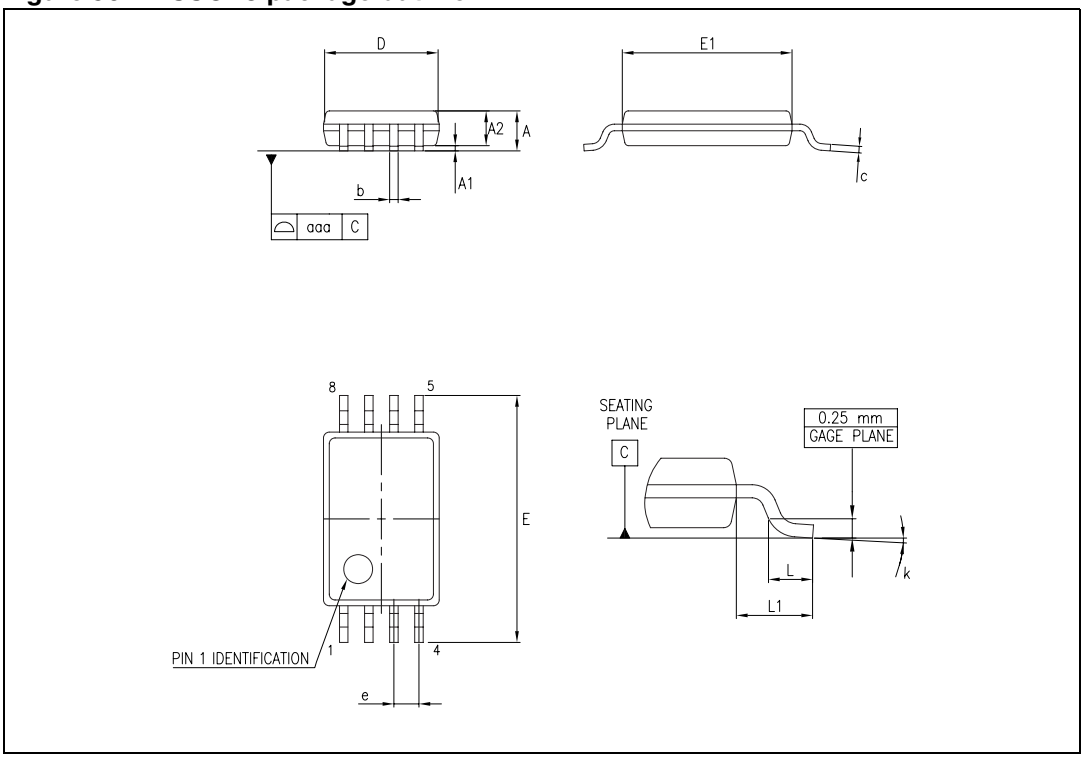


Table 8. TSSOP8 package mechanical data

Symbol	Dimensions					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A			1.20			0.047
A1	0.05		0.15	0.002		0.006
A2	0.80	1.00	1.05	0.031	0.039	0.041
b	0.19		0.30	0.007		0.012
c	0.09		0.20	0.004		0.008
D	2.90	3.00	3.10	0.114	0.118	0.122
E	6.20	6.40	6.60	0.244	0.252	0.260
E1	4.30	4.40	4.50	0.169	0.173	0.177
e		0.65			0.0256	
k	0°		8°	0°		8°
L	0.45	0.60	0.75	0.018	0.024	0.030
L1		1			0.039	
aaa			0.10			0.004

3.3 MiniSO-8 package information

Figure 51. MiniSO-8 package outline

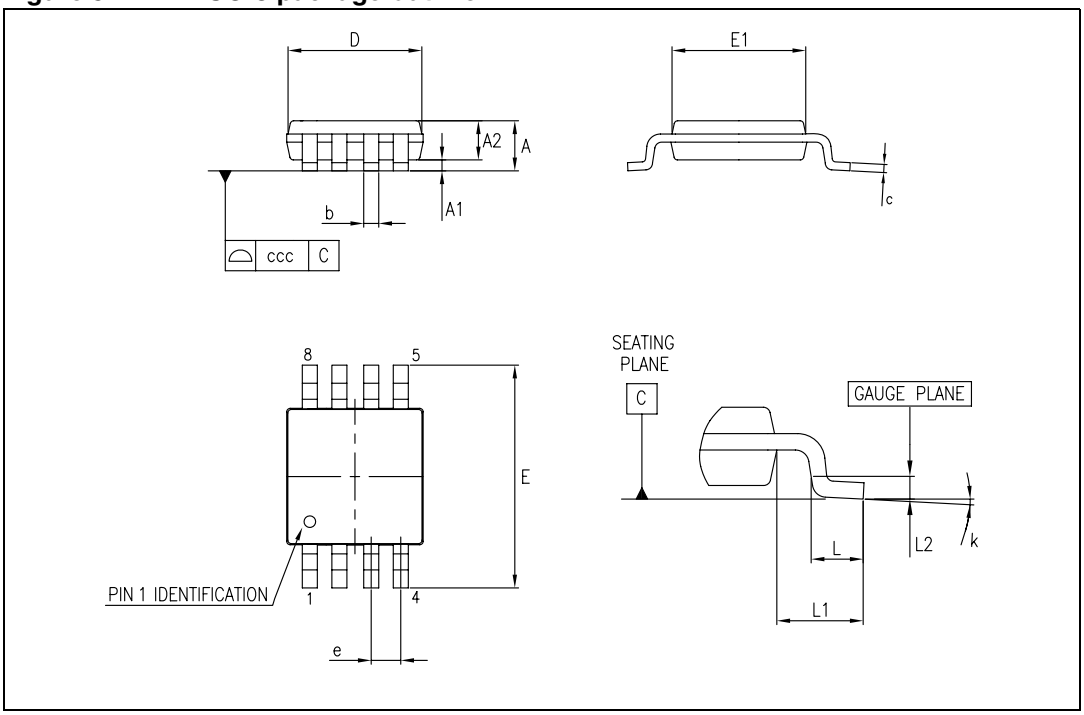


Table 9. MiniSO-8 package mechanical data

Symbol	Dimensions					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A			1.1			0.043
A1	0		0.15	0		0.006
A2	0.75	0.85	0.95	0.030	0.033	0.037
b	0.22		0.40	0.009		0.016
c	0.08		0.23	0.003		0.009
D	2.80	3.00	3.20	0.11	0.118	0.126
E	4.65	4.90	5.15	0.183	0.193	0.203
E1	2.80	3.00	3.10	0.11	0.118	0.122
e		0.65			0.026	
L	0.40	0.60	0.80	0.016	0.024	0.031
L1		0.95			0.037	
L2		0.25			0.010	
k	0°		8°	0°		8°
ccc			0.10			0.004

3.4 SO-14 package information

Figure 52. SO-14 package outline

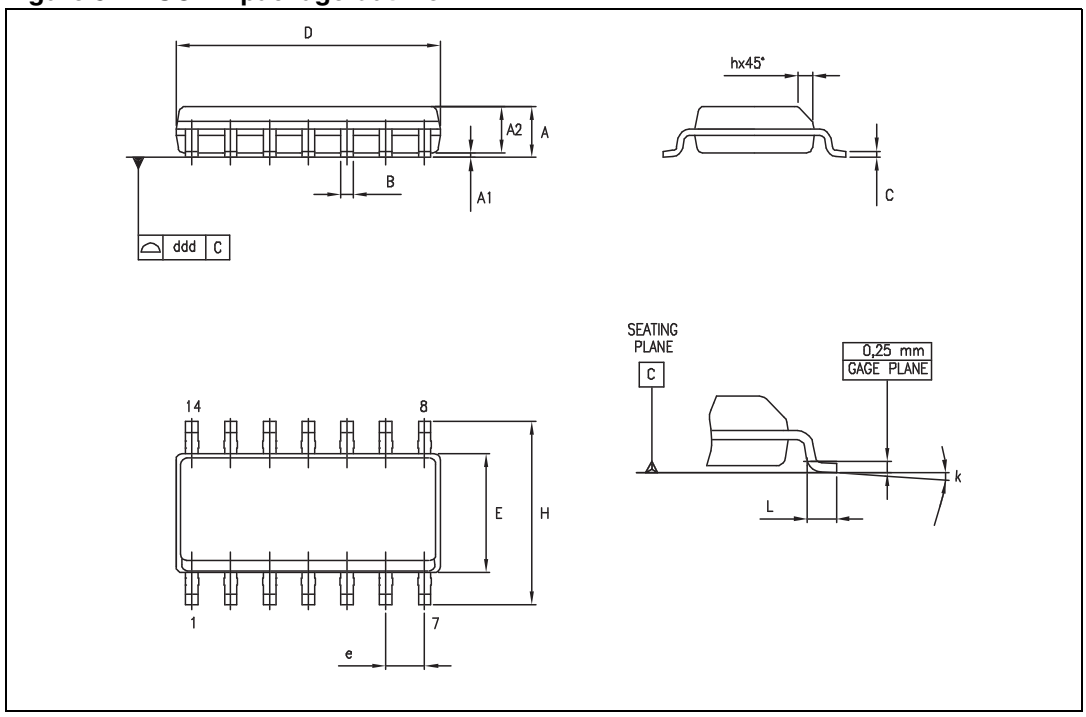


Table 10. SO-14 package mechanical data

Symbol	Dimensions					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	1.35		1.75	0.05		0.068
A1	0.10		0.25	0.004		0.009
A2	1.10		1.65	0.04		0.06
B	0.33		0.51	0.01		0.02
C	0.19		0.25	0.007		0.009
D	8.55		8.75	0.33		0.34
E	3.80		4.0	0.15		0.15
e		1.27			0.05	
H	5.80		6.20	0.22		0.24
h	0.25		0.50	0.009		0.02
L	0.40		1.27	0.015		0.05
k	8° (max.)					
ddd			0.10			0.004

3.5 TSSOP14 package information

Figure 53. TSSOP14 package outline

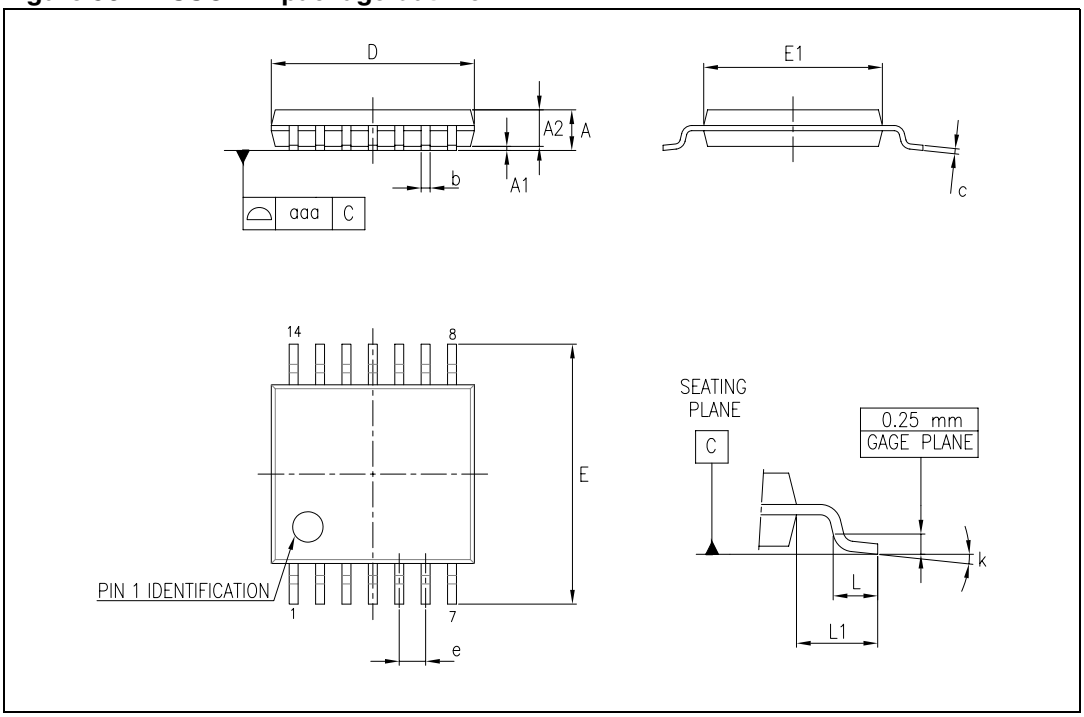


Table 11. TSSOP14 package mechanical data

Symbol	Dimensions					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A			1.20			0.047
A1	0.05		0.15	0.002	0.004	0.006
A2	0.80	1.00	1.05	0.031	0.039	0.041
b	0.19		0.30	0.007		0.012
c	0.09		0.20	0.004		0.0089
D	4.90	5.00	5.10	0.193	0.197	0.201
E	6.20	6.40	6.60	0.244	0.252	0.260
E1	4.30	4.40	4.50	0.169	0.173	0.176
e		0.65			0.0256	
L	0.45	0.60	0.75	0.018	0.024	0.030
L1		1.00			0.039	
k	0°		8°	0°		8°
aaa			0.10			0.004

3.6 SOT23-5 package information

Figure 54. SOT23-5L package outline

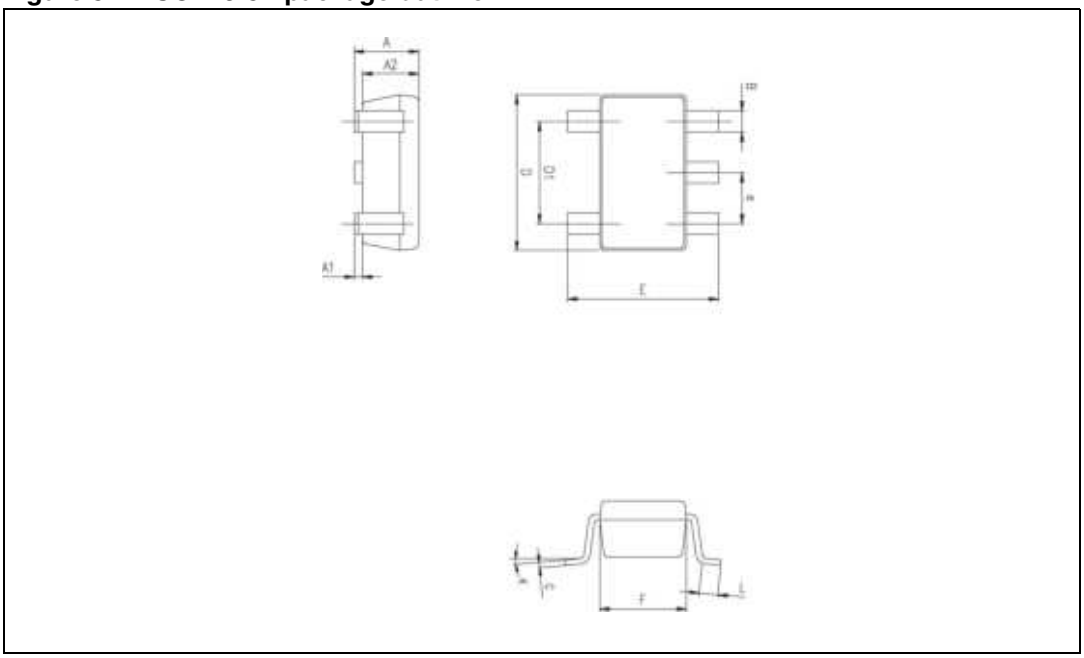


Table 12. SOT23-5L package mechanical data

Symbol	Dimensions					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	0.90	1.20	1.45	0.035	0.047	0.057
A1			0.15			0.006
A2	0.90	1.05	1.30	0.035	0.041	0.051
B	0.35	0.40	0.50	0.013	0.015	0.019
C	0.09	0.15	0.20	0.003	0.006	0.008
D	2.80	2.90	3.00	0.110	0.114	0.118
D1		1.90			0.075	
e		0.95			0.037	
E	2.60	2.80	3.00	0.102	0.110	0.118
F	1.50	1.60	1.75	0.059	0.063	0.069
L	0.10	0.35	0.60	0.004	0.013	0.023
K	0°		10°			

4 Ordering information

Table 13. Order codes

Order code	Temperature range	Package	Packaging	Marking
TS1871ID/IDT	-40 °C to +125 °C	SO-8	Tube or tape and reel	1871I
TS1871IAID/AIDT				1871AI
TS1871ILT		SOT23-5L	Tape and reel	K171
TS1871AILT				K172
TS1871IYLT(1)		SOT23-5L (automotive grade)	Tape and reel	K182
TS1871AIYLT(1)				K183
TS1872ID/IDT		SO-8	Tube or tape and reel	1872I
TS1872AID/AIDT				1872AI
TS1872IYDT(1)		SO-8 (automotive grade)	Tube or tape and reel	1872Y
TS1872AIYDT(1)				1872AY
TS1872IPT		TSSOP8	Tape and reel	1872I
TS1872AIPT				1872A
TS1872IYPT(1)		TSSOP8 (automotive grade)	Tape and reel	1872Y
TS1872AIYPT(1)				872AY
TS1872IST		MiniSO-8	Tape and reel	K171
TS1872AIST				K172
TS1874ID/IDT		SO-14	Tube or tape and reel	1874I
TS1874AID/AIDT				1874AI
TS1874IYDT(1)		SO-14 (automotive grade)	Tape and reel	TS1874Y
TS1874AIYDT(1)				TS1874AY
TS1874IPT		TSSOP14	Tape and reel	1874I
TS1874AIPT				1874AI
TS1874IYPT(1)		TSSOP14 (automotive grade)	Tape and reel	TS1874Y
TS1874AIYPT(1)				TS1874AY

1. Qualified and characterized according to AEC Q100 and Q003 or equivalent, advanced screening according to AEC Q001 and Q 002 or equivalent.

5 Revision history

Table 14. Document revision history

Date	Revision	Changes
01-Apr-2002	1	First release.
02-Jan-2005	2	Modifications on AMR *Table 2 on page 3* (explanation of V_{id} and V_i limits).
21-May-2007	3	Added limits over temperature range in *Table 4 on page 5*, *Table 5 on page 6*, *Table 6 on page 7*. Added SVR in *Table 6* (SVR parameter removed from *Table 4* and *Table 5*). Added equivalent input voltage noise in *Table 4*, *Table 5*, and *Table 6*. Added R_{thjc} values in *Table 2*. Added automotive grade part numbers to order codes table. Moved order codes table to *Section 4 on page 23*. Updated format of package information.
17-Jan-2008	4	Updated footnote for automotive grade order codes in *Table 13*.
12-Mar-2010	5	Updated document format. Modified headings, added root part number TS187xA and added *Table 1: Device summary* on cover page. Corrected typical values for A_{Vd}, Isource, Isink and Vol in *Table 4*, *Table 5* and *Table 6*. Added *Figure 48: Common mode rejection ratio vs. frequency at V_{CC} = 5 V*. Updated package information in *Chapter 3*. Removed order codes for SO-8 automotive grade packages (TS1871IYDT and TS1871AIYDT) from *Table 13*. Removed order codes for DIP package from *Table 13*.
06-Jul-2012	6	Updated *Table 13: Order codes*.
19-Nov-2012	7	Updated *Features* (added MiniSO-8, SO-8, SO-14, TSSOP8, and TSSOP14 package). Updated titles of *Table 5* and *Table 6* (replaced V_{DD} by V_{CC-}). Updated TS1871IYLT, TS1871AIYLT, TS1872IYDT, TS1872AIYDT, TS1874IYDT, TS1874AIYDT, TS1874IYPT, TS1872IYPT, TS1872AIYPT, and TS1874AIYPT order code in *Table 13* (status qualified). Updated packaging for TS1874IYDT and TS1874AIYDT order code (indicated only tape and reel) in *Table 13*. Added note *1.* below *Table 13*. Minor corrections throughout document.

Please Read Carefully:

Information in this document is provided solely in connection with ST products. STMicroelectronics NV and its subsidiaries (“ST”) reserve the right to make changes, corrections, modifications or improvements, to this document, and the products and services described herein at any time, without notice.

All ST products are sold pursuant to ST’s terms and conditions of sale.

Purchasers are solely responsible for the choice, selection and use of the ST products and services described herein, and ST assumes no liability whatsoever relating to the choice, selection or use of the ST products and services described herein.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted under this document. If any part of this document refers to any third party products or services it shall not be deemed a license grant by ST for the use of such third party products or services, or any intellectual property contained therein or considered as a warranty covering the use in any manner whatsoever of such third party products or services or any intellectual property contained therein.

UNLESS OTHERWISE SET FORTH IN ST’S TERMS AND CONDITIONS OF SALE ST DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY WITH RESPECT TO THE USE AND/OR SALE OF ST PRODUCTS INCLUDING WITHOUT LIMITATION IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION), OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT.

UNLESS EXPRESSLY APPROVED IN WRITING BY TWO AUTHORIZED ST REPRESENTATIVES, ST PRODUCTS ARE NOT RECOMMENDED, AUTHORIZED OR WARRANTED FOR USE IN MILITARY, AIR CRAFT, SPACE, LIFE SAVING, OR LIFE SUSTAINING APPLICATIONS, NOR IN PRODUCTS OR SYSTEMS WHERE FAILURE OR MALFUNCTION MAY RESULT IN PERSONAL INJURY, DEATH, OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE. ST PRODUCTS WHICH ARE NOT SPECIFIED AS "AUTOMOTIVE GRADE" MAY ONLY BE USED IN AUTOMOTIVE APPLICATIONS AT USER’S OWN RISK.

Resale of ST products with provisions different from the statements and/or technical features set forth in this document shall immediately void any warranty granted by ST for the ST product or service described herein and shall not create or extend in any manner whatsoever, any liability of ST.

ST and the ST logo are trademarks or registered trademarks of ST in various countries.

Information in this document supersedes and replaces all information previously supplied.

The ST logo is a registered trademark of STMicroelectronics. All other names are the property of their respective owners.

© 2012 STMicroelectronics - All rights reserved

STMicroelectronics group of companies

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Philippines - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States of America

www.st.com