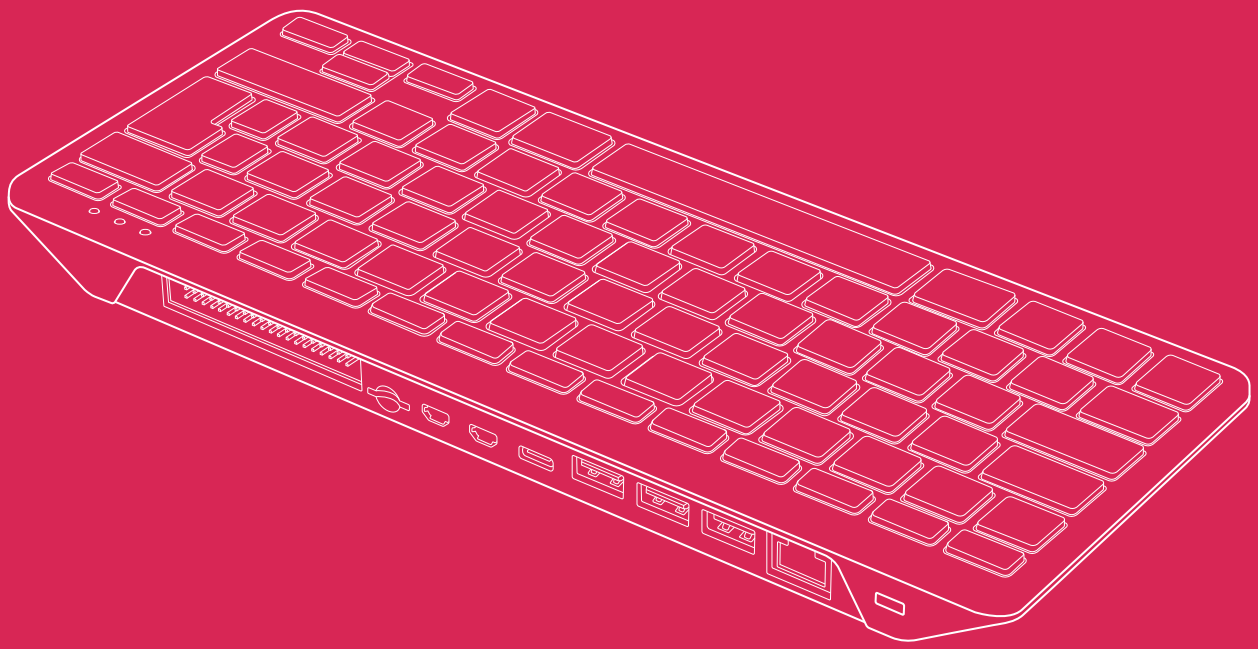
Raspberry Pi 400

Published April 2026



HDMI™
HIGH-DEFINITION MULTIMEDIA INTERFACE

The terms HDMI, HDMI High-Definition Multimedia Interface, and the HDMI Logo are trademarks or registered trademarks of HDMI Licensing Administrator, Inc.

Raspberry Pi Ltd

Overview



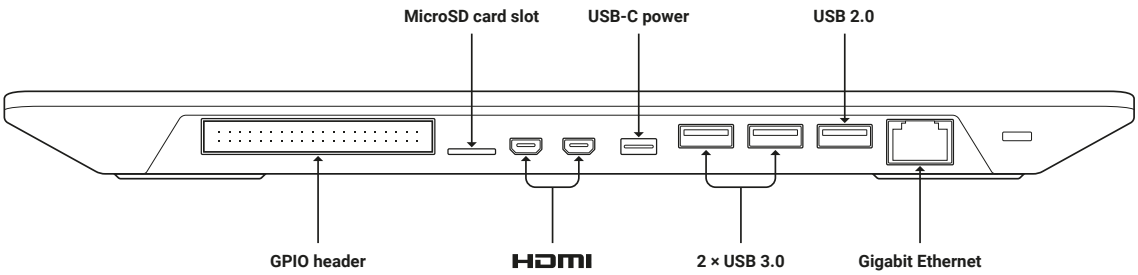
Featuring a quad-core 64-bit processor, wireless networking, dual-display output and 4K video playback, Raspberry Pi 400 is a complete personal computer, built into a compact keyboard.

Raspberry Pi 400 is ideal for surfing the web, creating and editing documents, watching videos, and learning to program using the Raspberry Pi OS desktop environment.

Raspberry Pi 400 is available in a number of different regional variants and as either a computer kit, containing everything you need to get started (except for a TV or monitor), or a computer unit only.

Specification

Processor:	Broadcom BCM2711 quad-core Cortex-A72 (ARM v8) 64-bit SoC @ 1.8GHz
Memory:	4GB LPDDR4-3200
Connectivity:	• Dual-band (2.4GHz and 5.0GHz) IEEE 802.11b/g/n/ac wireless LAN, Bluetooth 5.0, BLE • Gigabit Ethernet • 2 × USB 3.0 and 1 × USB 2.0 ports
GPIO:	Horizontal 40-pin GPIO header
Video & sound:	2 × micro HDMI ports (supports up to 4Kp60)
Multimedia:	H.265 (4Kp60 decode); H.264 (1080p60 decode, 1080p30 encode); OpenGL ES 3.0 graphics
SD card support:	MicroSD card slot for operating system and data storage
Keyboard:	78-, 79- or 83-key compact keyboard (depending on regional variant)
Power:	5V DC via USB connector
Operating temperature:	0°C to +50°C
Dimensions:	286 mm × 122 mm × 23 mm (maximum)
Compliance:	For a full list of local and regional product approvals, please visit pip.raspberrypi.com



Ordering options

Model number	Keyboard layout	Power supply	Mouse	MicroSD card	HDMI cable	Beginner's Guide	Price*
Raspberry Pi 400 UK Kit	UK	UK	Yes	16GB microSD card, pre-programmed with Raspberry Pi OS	1 × micro HDMI to HDMI-A cable, 1 m	English	$80
Raspberry Pi 400 US Kit	US	US				English	
Raspberry Pi 400 DE Kit	DE	EU				German	
Raspberry Pi 400 FR Kit	FR	EU				French	
Raspberry Pi 400 IT Kit	IT	EU				Italian	
Raspberry Pi 400 ES Kit	ES	EU				Spanish	
Raspberry Pi 400 DK Kit	DK	EU				Danish	
Raspberry Pi 400 PT Kit	PT	EU				Portugese	
Raspberry Pi 400 SE Kit	SE	EU				Swedish	
Raspberry Pi 400 NO Kit	NO	EU				Norwegian	
Raspberry Pi 400 HU Kit	HU	EU				English	
Raspberry Pi 400 EU Kit	US	EU				English	
Raspberry Pi 400 IN Kit	US	India				English	
Raspberry Pi 400 AU Kit	US	ANZ				English	
Raspberry Pi 400 AS Kit	US	UK				English	
Raspberry Pi 400 UK Unit	UK	Not included in unit-only option					$60
Raspberry Pi 400 US Unit	US						
Raspberry Pi 400 DE Unit	DE						
Raspberry Pi 400 FR Unit	FR						
Raspberry Pi 400 IT Unit	IT						
Raspberry Pi 400 ES Unit	ES						
Raspberry Pi 400 DK Unit	DK						
Raspberry Pi 400 PT Unit	PT						
Raspberry Pi 400 SE Unit	SE						
Raspberry Pi 400 NO Unit	NO						
Raspberry Pi 400 HU Unit	HU						
Raspberry Pi 400 JP Unit	JP						

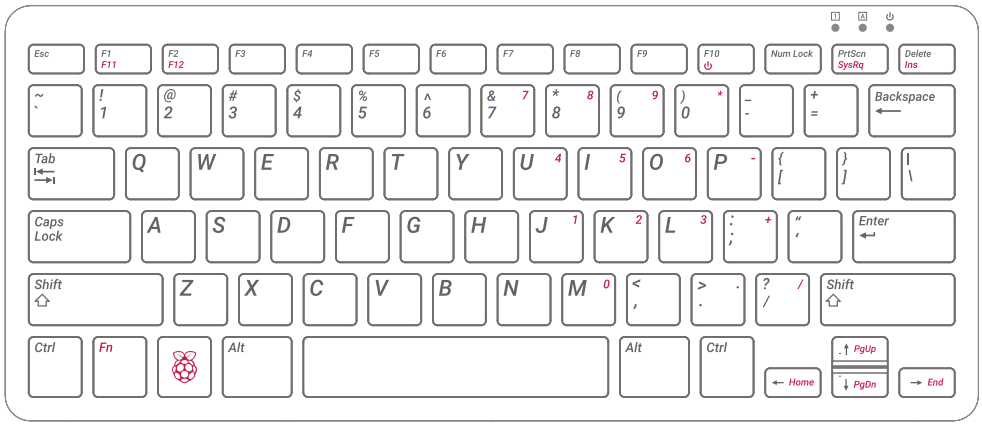
* price excludes sales tax, any applicable import duty, and local shipping costs

Keyboard print layouts

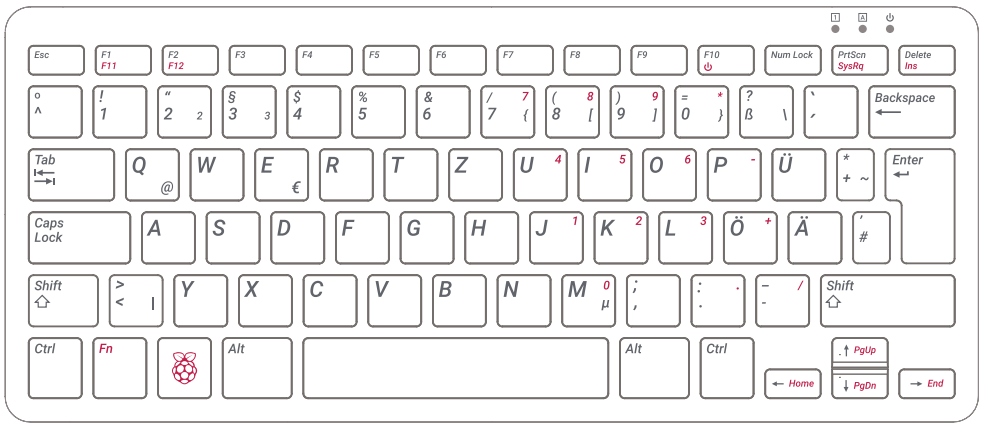
UK



US



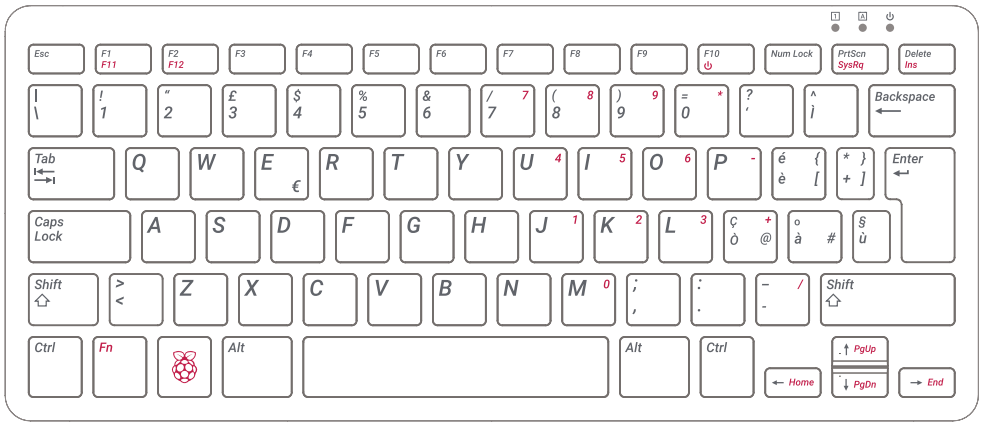
DE



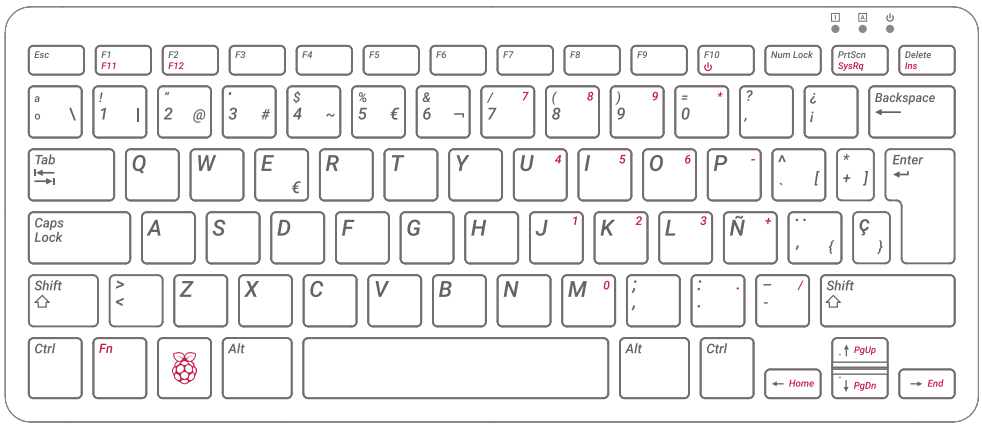
FR


Esc
F1 F11
F2 F12
F3
F4
F5
F6
F7
F8
F9
F10
Num Lock
PrtScn SysRq
Delete Ins
Backspace
Tab
Caps Lock
Enter
Shift
Ctrl
Fn
Alt
PgUp
PgDn
Home
End

IT


Esc
F1 F11
F2 F12
F3
F4
F5
F6
F7
F8
F9
F10
Num Lock
PrtScn SysRq
Delete Ins
Backspace
Tab
Caps Lock
Enter
Shift
Ctrl
Fn
Alt
PgUp
PgDn
Home
End

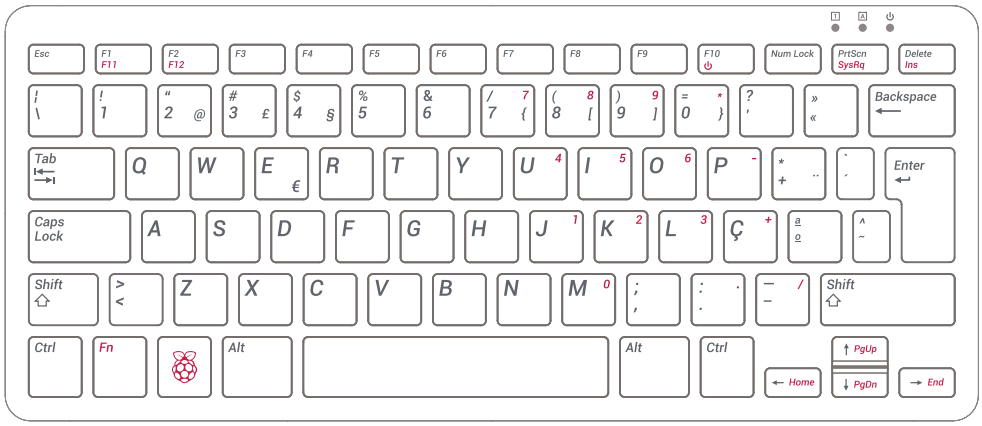
ES


Esc
F1 F11
F2 F12
F3
F4
F5
F6
F7
F8
F9
F10
Num Lock
PrtScn SysRq
Delete Ins
Backspace
Tab
Caps Lock
Enter
Shift
Ctrl
Fn
Alt
PgUp
PgDn
Home
End

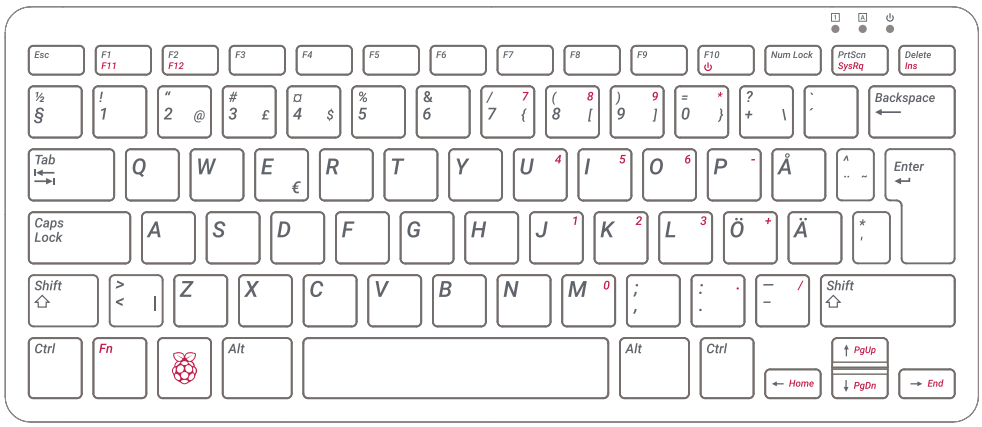
DK


Esc
F1 F11
F2 F12
F3
F4
F5
F6
F7
F8
F9
F10
Num Lock
PrtScn SysRq
Delete Ins
§ ½
! 1
" 2 @
3 £
¤ 4 $
% 5
& 6
/ 7 7 {
(8 8 [
) 9 9]
= 0 * }
? + `
Backspace
Tab
Q
W
E €
R
T
Y
U 4
I 5
O 6
P -
Å
^ ~
Enter
Caps Lock
A
S
D
F
G
H
J 1
K 2
L 3
Æ +
Ø
* '
Shift
> < \
Z
X
C
V
B
N
M 0 µ
; ,
: .
_ /
Shift
Ctrl
Fn
Alt
Alt
Ctrl
PgUp
Home
PgDn
End

PT


Esc
F1 F11
F2 F12
F3
F4
F5
F6
F7
F8
F9
F10
Num Lock
PrtScn SysRq
Delete Ins
¦ \
! 1
" 2 @
3 £
$ 4 §
% 5
& 6
/ 7 7 {
(8 8 [
) 9 9]
= 0 * }
? '
» «
Backspace
Tab
Q
W
E €
R
T
Y
U 4
I 5
O 6
P -
* + ¨
` ´
Enter
Caps Lock
A
S
D
F
G
H
J 1
K 2
L 3
Ç +
ª º
^ ~
Shift
> <
Z
X
C
V
B
N
M 0
; ,
: .
_ /
Shift
Ctrl
Fn
Alt
Alt
Ctrl
PgUp
Home
PgDn
End

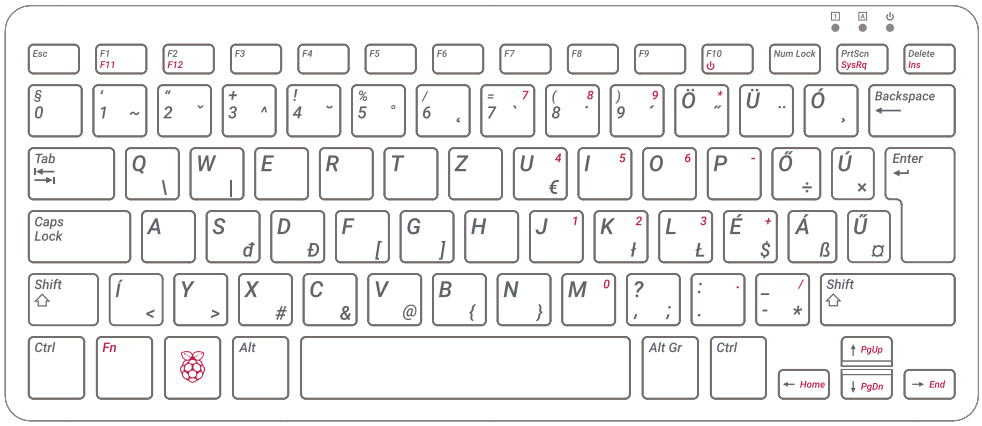
SE


Esc
F1 F11
F2 F12
F3
F4
F5
F6
F7
F8
F9
F10
Num Lock
PrtScn SysRq
Delete Ins
½ §
! 1
" 2 @
3 £
¤ 4 $
% 5
& 6
/ 7 7 {
(8 8 [
) 9 9]
= 0 * }
? + \
` ´
Backspace
Tab
Q
W
E €
R
T
Y
U 4
I 5
O 6
P -
Å
^ ~
Enter
Caps Lock
A
S
D
F
G
H
J 1
K 2
L 3
Ö +
Ä
* '
Shift
> < |
Z
X
C
V
B
N
M 0
; ,
: .
_ /
Shift
Ctrl
Fn
Alt
Alt
Ctrl
PgUp
Home
PgDn
End

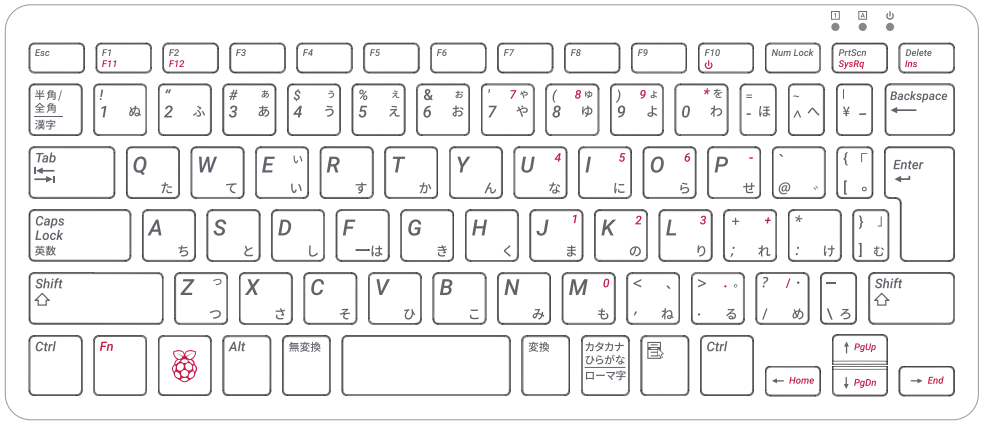
NO


Esc F1 F11 F2 F12 F3 F4 F5 F6 F7 F8 F9 F10 Num Lock PrtScn SysRq Delete Ins
§ ! 1 " 2 @ # 3 £ ¤ 4 $ % 5 & 6 / 7 { (8 [ ) 9] = 0 } ? + ` \ ´ Backspace
Tab Q W E € R T Y U 4 I 5 O 6 P - Å ^ ¨ ~ Enter
Caps Lock A S D F G H J 1 K 2 L 3 Ø + Æ * ,
Shift > < Z X C V B N M 0 µ ; , : . _ - / Shift
Ctrl Fn Alt Alt Ctrl PgUp Home PgDn End

HU


Esc F1 F11 F2 F12 F3 F4 F5 F6 F7 F8 F9 F10 Num Lock PrtScn SysRq Delete Ins
§ 0 ' 1 ~ " 2 ˇ + 3 ^ ! 4 ˘ % 5 ° / 6 ˛ = 7 ` (8 ˙) 9 ´ Ö ˝ Ü ¨ Ó ¸ Backspace
Tab Q \ W | E R T Z U 4 € I 5 O 6 P - Ő ÷ Ú × Enter
Caps Lock A S đ D Đ F [G] H J 1 K 2 ł L 3 Ł É ˇ $ Á ß Ű ¤
Shift Í < Y > X # C & V @ B { N } M 0 ? , ; : . _ - / * Shift
Ctrl Fn Alt Alt Gr Ctrl PgUp Home PgDn End

JP


Esc F1 F11 F2 F12 F3 F4 F5 F6 F7 F8 F9 F10 Num Lock PrtScn SysRq Delete Ins
半角/全角 漢字 ! 1 ぬ " 2 ふ # 3 あ ぁ $ 4 う ぅ % 5 え ぇ & 6 お ぉ ' 7 や ゃ (8 ゆ ゅ) 9 よ ょ * を 0 わ = - ほ ~ ^ へ | ¥ ー Backspace
Tab Q た W て E い ぃ R す T か Y ん U 4 な I 5 に O 6 ら P - せ ` @ ゛ { [「 ° Enter
Caps Lock 英数 A ち S と D し F ー は G き H く J 1 ま K 2 の L 3 り + ; れ * : け }] 」 む
Shift Z っ つ X さ C そ V ひ B こ N み M 0 も < , 、 ね > . 。 る ? / ・ め _ \ ろ Shift
Ctrl Fn Alt 無変換 変換 カタカナ ひらがな ローマ字 Ctrl PgUp Home PgDn End

WARNINGS

- Any external power supply used with Raspberry Pi 400 shall comply with relevant regulations and standards applicable in the country of intended use.
- This product should be operated in a well-ventilated environment and should not be covered when being operated.
- The connection of incompatible devices to Raspberry Pi 400 may affect compliance, result in damage to the unit, and invalidate the warranty.
- There are no user-serviceable parts inside Raspberry Pi 400, and opening the unit is likely to damage the product and invalidate the warranty.
- All peripherals used with this product should comply with relevant standards for the country of use and be marked accordingly to ensure that safety and performance requirements are met. These articles include, but are not limited to, mice, monitors and cables when used in conjunction with Raspberry Pi 400.
- The cables and connectors of all peripherals used with this product must have adequate insulation so that relevant safety requirements are met.
- Prolonged exposure to direct sunlight may cause discoloration.

SAFETY INSTRUCTIONS

To avoid malfunction or damage to this product, please observe the following:

- Do not expose to water or moisture whilst in operation.
- Do not expose to heat from any source; Raspberry Pi 400 is designed for reliable operation at normal ambient temperatures.
- Take care whilst handling to avoid mechanical or electrical damage to the computer.


Backspace
Enter
Tab
Caps Lock
Shift
Ctrl
Fn
Alt



Raspberry Pi is a trademark of Raspberry Pi Ltd