9-CHANNEL RS-422 / RS-485 TRANSCEIVER

Check for Samples: SN65HVD09-EP


FEATURES

- **Designed to Operate at up to 20 Million Data Transfers per Second on Each RS-422/RS-485 Channel**
- **SN65HVD09 Packaged in Thin Shrink Small-Outline Package with 0.5-mm Pin Pitch**
- **ESD Protection on Bus Pins Exceeds 12kV**
- **Low Disabled Supply Current 8 mA Typ**
- **Thermal Shutdown Protection**
- **Positive- and Negative-Current Limiting**
- **Power-Up/Down Glitch Protection**


SUPPORTS DEFENSE, AEROSPACE, AND MEDICAL APPLICATIONS

- **Controlled Baseline**
- **One Assembly/Test Site**
- **One Fabrication Site**
- **Extended Product Life Cycle**
- **Extended Product-Change Notification**
- **Product Traceability**

SN65HVD09 DGG
(TOP VIEW)

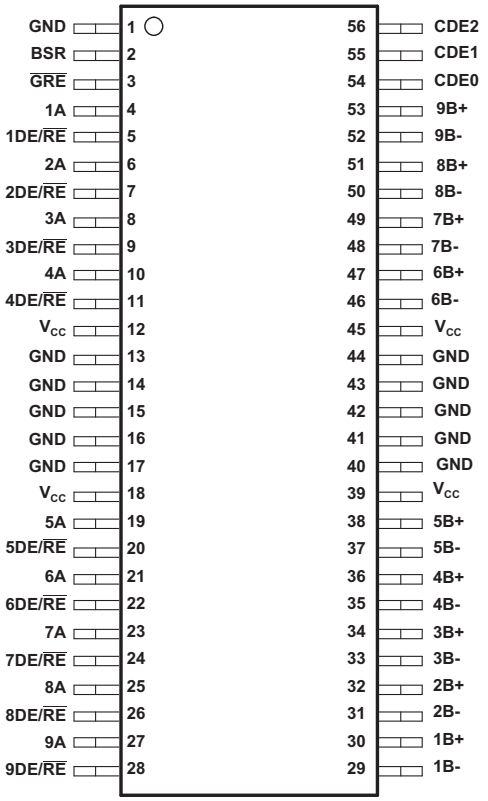

Terminals 13 through 17, and 40 through 44 are connected together to the package lead frame and signal ground.

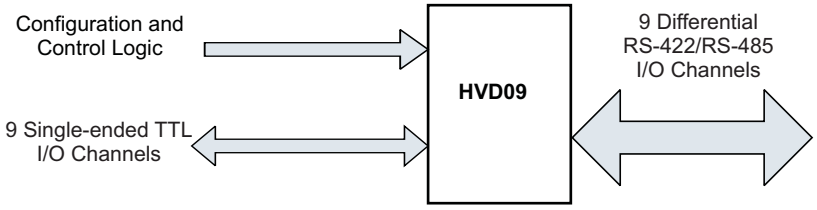

DESCRIPTION

The SN65HVD09 is a 9-channel RS-422 / RS-485 transceiver suitable for industrial applications. It offers improved switching performance, a small package, and high ESD protection. The precise skew limits ensures that the propagation delay times, not only from channel-to-channel but from device-to-device, are closely matched for the tight skew budgets associated with high-speed parallel data buses.

Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

PRODUCTION DATA information is current as of publication date. Products conform to specifications per the terms of the Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.

Copyright © 2011, Texas Instruments Incorporated

Patented thermal enhancements are used in the thin shrink, small-outline package (TSSOP), allowing operation over the industrial temperature range. The TSSOP package offers very small board area requirements while reducing the package height to 1 mm. This provides more board area and allows component mounting to both sides of the printed circuit boards for low-profile, space-restricted applications such as small form-factor hard disk drives.

The HVD09 can withstand electrostatic discharges exceeding 12 kV using the human-body model, and 600 V using the machine model on the RS-485 I/O terminals. This provides protection from the noise that can be coupled into external cables. The other terminals of the device can withstand discharges exceeding 4 kV and 400 V respectively.

Each of the nine half-duplex channels of the HVD09 is designed to operate with either RS-422 or RS-485 communication networks.

The SN65HVD09 is characterized for operation from –40°C to 85°C.

Copyright © 2011, Texas Instruments Incorporated

This integrated circuit can be damaged by ESD. Texas Instruments recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

ORDERING INFORMATION(1)

T_A	PACKAGE(2)	ORDERABLE PART NUMBER	TOP-SIDE MARKING	VID NUMBER
–40°C to 85°C	TSSOP-DGG	SN65HVD09IDGGREP	SN65HVD09EP	V62/12607-01XE

(1) For the most current package and ordering information, see the Package Option Addendum at the end of this document, or see the TI website at www.ti.com.
(2) Package drawings, standard packing quantities, thermal data, symbolization, and PCB design guidelines are available at www.ti.com/sc/package.


PIN FUNCTIONS

PIN		LOGIC LEVEL	I/O	TERMINATION	DESCRIPTION
NAME	NO.				
1A to 9A	4,6,8,10, 19,21,23, 25,27	TTL	I/O	Pullup	1A to 9A carry data to and from the communication controller.
1B– to 9B–	29,31,33, 35,37,.46 , 48,50,52	RS-485	I/O	Pulldown	1B– to 9B– are the inverted data signals of the balanced pair to/from the bus.
1B+ to 9B+	30,32,34, 36,38,47, 49,51,53	RS-485	I/O	Pullup	1B+ to 9B+ are the noninverted data signals of the balanced pair to/from the bus.
BSR	2	TTL	Input	Pullup	BSR is the bit significant response. BSR disables receivers 1 through 8 and enables wired-OR drivers when BSR and DE/$\overline{RE}$ and CDE1 or CDE2 are high. Channel 9 is placed in a high-impedance state with BSR high.
CDE0	54	TTL	Input	Pulldown	CDE0 is the common driver enable 0. Its input signal enables all drivers when CDE0 and 1DE/$\overline{RE}$ – 9DE/$\overline{RE}$ are high.
CDE1	55	TTL	Input	Pulldown	CDE1 is the common driver enable 1. Its input signal enables drivers 1 to 4 when CDE1 is high and BSR is low.
CDE2	56	TTL	Input	Pulldown	CDE2 is the common driver enable 2. When CDE2 is high and BSR is low, drivers 5 to 8 are enabled.
$\overline{CRE}$	3	TTL	Input	Pullup	$\overline{CRE}$ is the common receiver enable. When high, CRE disables receiver channels 5 to 9.
1DE/$\overline{RE}$ to 9DE/$\overline{RE}$	5,7,9,11, 20,22,24, 26,28	TTL	Input	Pullup	1DE/$\overline{RE}$–9DE/$\overline{RE}$ are direction controls that transmit data to the bus when it and CDE0 are high. Data is received from the bus when 1DE/$\overline{RE}$–9DE/$\overline{RE}$ and CRE and BSR are low and CDE1 and CDE2 are low.
GND	1,13,14, 15,16,17, 40,41,42, 43,44	NA	Power	NA	GND is the circuit ground. All GND terminals except terminal 1 are physically tied to the die pad for improved thermal conductivity.(1)
V_{CC}	12,18,39, 45	NA	Power	NA	Supply voltage

(1) Terminal 1 must be connected to signal ground for proper operation.

Copyright © 2011, Texas Instruments Incorporated

LOGIC DIAGRAM (POSITIVE LOGIC)

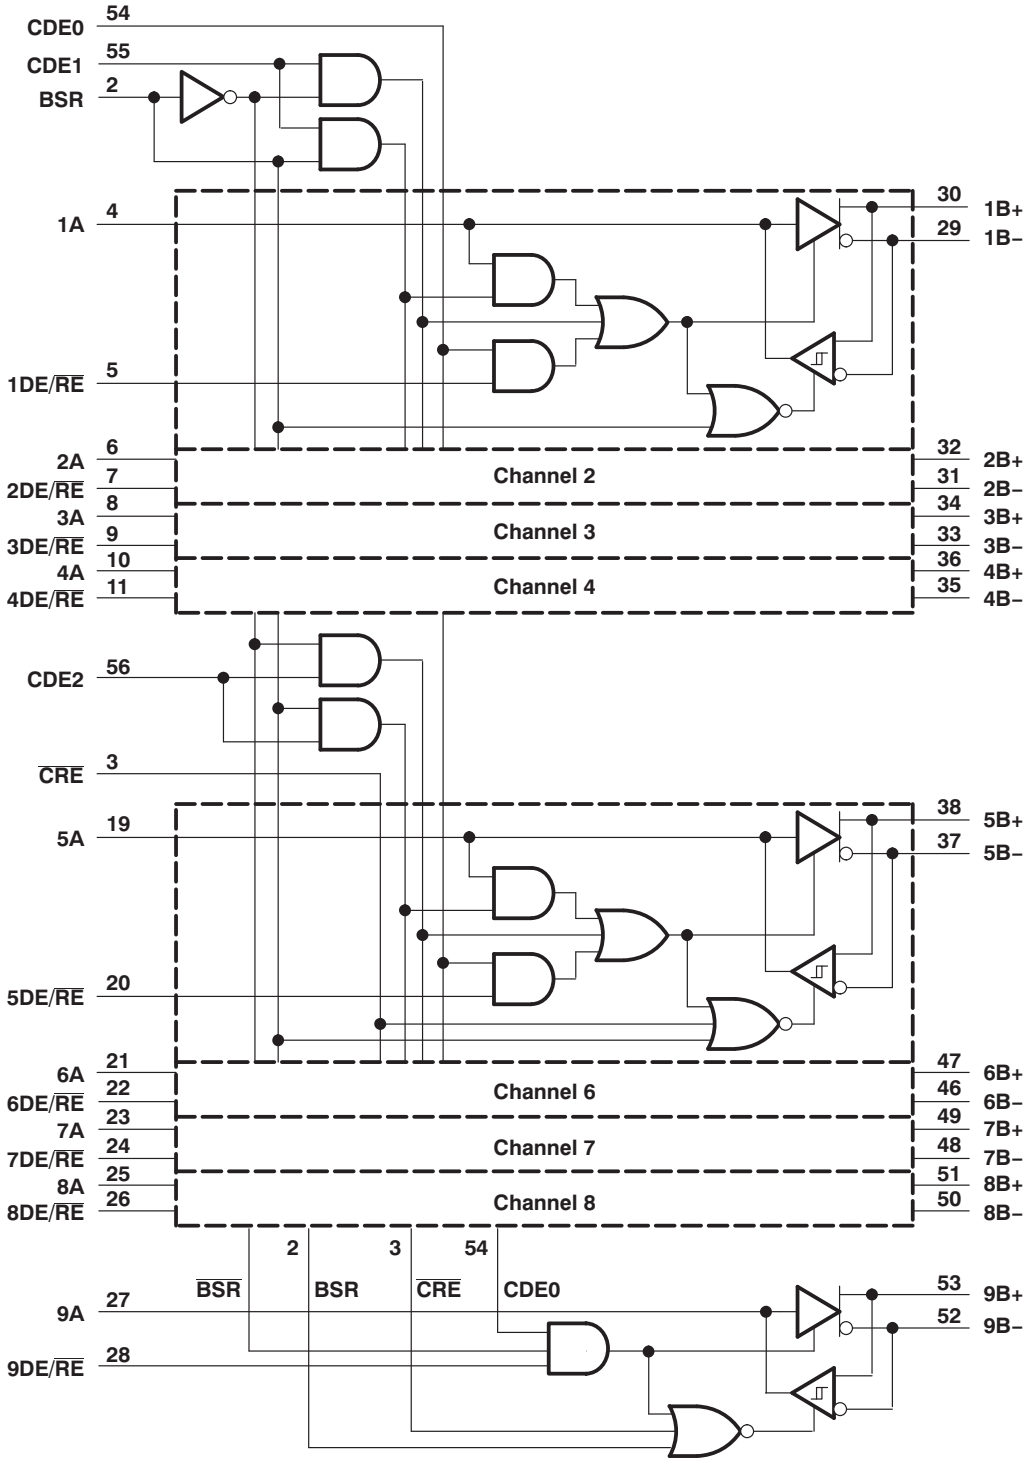

Copyright © 2011, Texas Instruments Incorporated

ABSOLUTE MAXIMUM RATINGS(1)

			VALUE	UNIT
V_{CC}	Supply voltage range(2)		–0.3 to 6	V
	Bus voltage range		–10 to 15	V
	Data I/O and control (A side) voltage range		–0.3 to V_{CC} +0.5	V
I_O	Receiver output current		±40	mA
	Electrostatic discharge	B side and GND, ESD HBM	12	kV
		B side and GND, ESD MM	400	V
		All terminals, ESD HBM	4	kV
		All terminals, ESD MM	400	V
	Continuous total power dissipation (3)		Internally Limited	

(1) Stresses beyond those listed under *absolute maximum ratings* may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under *recommended operating conditions* is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.r
(2) All voltage values are with respect to the GND terminals.
(3) The maximum operating junction temperature is internally limited. Use the Dissipation Rating Table to operate below this temperature.

DISSIPATION RATINGS

PACKAGE	TA ≤ 25°C	OPERATING FACTOR(1) ABOVE T_A = 25°C	T_A = 70°C POWER RATING	T_A = 85°C POWER RATING
DGG	2500 mW	20 mW/°C	1600 mW	1300 mW

(1) This is the inverse of the junction-to-ambient thermal resistance when board-mounted and with no air flow.

PACKAGE THERMAL CHARACTERISTICS

			MIN	NOM	MAX	UNIT
θ_{JA}	Junction-to-ambient thermal resistance	DGG, board-mounted, no air flow		50		°C/W
θ_{JC}	Junction-to-case thermal resistance	DGG		27		°C/W
T_{SD}	Thermal shutdown temperature			165		°C

RECOMMENDED OPERATING CONDITIONS

			MIN	NOM	MAX	UNIT
V_{CC}	Supply voltage		4.75	5	5.25	V
V_{IH}	High-level input voltage	Except nB+, nB–(1)	2			V
V_{IL}	Low-level input voltage				0.8	V
V_O, V_I, or V_{IC}	Voltage at any bus terminal (separately or common-mode)	nB+ or nB–	–7		12	V
I_O	Output current	Driver	–60		60	mA
		Receiver	–8		8	mA
T_A	Operating free-air temperature		–40		85	°C

(1) n = 1 - 9

Copyright © 2011, Texas Instruments Incorporated

ELECTRICAL CHARACTERISTICS

over operating free-air temperature range (unless otherwise noted)

PARAMETER		TEST CONDITIONS			SN65HVD09			UNIT
					MIN	TYP(1)	MAX	
$\|V_{OD}\|$	Driver differential output voltage magnitude	RS-422 load,	R_L = 100 Ω	See Figure 1	0.56	1.6		V
		RS-485 load,	R_L = 54 Ω	See Figure 1		1.4		V
		Pull-Up Pull-Down Load		See Figure 2	1	1.5		V
V_{OH}	High-level output voltage	A side, I_{OH} = –8 mA, V_{ID} = 200 mV,		See Figure 4	4	4.5		V
		B side,		See Figure 2		3		V
V_{OL}	Low-level output voltage	A side, I_{OH} = 8 mA, V_{ID} = –200 mV,		See Figure 4		0.6	0.8	V
		B side,		See Figure 2		1		V
V_{IT+}	Receiver positive-going differential input threshold voltages	I_{OH} = –8 mA,		See Figure 4			0.2	V
$V_{IT–}$	Receiver negativegoing differential input threshold voltage	I_{OL} = 8 mA,		SeeFigure 4	–0.2			V
V_{hys}	Receiver input hysteresis ($V_{IT+} – V_{IT–}$)	V_{CC} = 5 V,	T_A = 25°C		24	45		mV
I_I	Bus input current	V_{IH} = 12 V	V_{CC} = 5 V,	Other input at 0 V			1	mA
		V_{IH} = 12 V	V_{CC} = 0,				1	mA
		V_{IH} = –7 V	V_{CC} = 5 V,		–0.8	–0.4		mA
		V_{IH} = –7 V	V_{CC} = 0,		–0.8	–0.3		mA
I_{IH}	High-level input current	nA, BSR, DE/$\overline{RE}$, and $\overline{CRE}$,		V_{IH} = 2 V	–100			µA
		CDE0, CDE1, and CDE2,		V_{IH} = 2V			100	µA
I_{IL}	Low-level input current	nA, BSR, DE/$\overline{RE}$, and $\overline{CRE}$,		V_{IL} = 0.8 V	–100			µA
		CDE1, CDE1, and CDE2,		V_{IL} = 0.8 V			100	µA
I_{OS}	Short circuit output current	nB+ or nB–					±260	mA
I_{OZ}	High-impedance-state output current	nA			See I_{IH} and I_{IL}			
		nB+ or nB–			See I_{II}			
I_{CC}	Supply current	Disabled					10	mA
		All drivers enabled, no load					60	mA
		All receivers enabled, no load					45	mA
C_O	Output capacitance	nB+ or nB– to GND				18		pF
C_{pd}	Power dissipation capacitance (2)	Receiver				40		pF
		Driver				100		pF

(1) All typical values are at V_{CC} = 5 V, T_A = 25°C.
(2) C_{pd} determines the no-load dynamic supply current consumption, $I_S = C_{PD} \times V_{CC} \times f + I_{CC}$

Copyright © 2011, Texas Instruments Incorporated

DRIVER SWITCHING CHARACTERISTICS

over recommended operating conditions (unless otherwise noted)

PARAMETER		TEST CONDITIONS	SN65HVD09			UNIT
			MIN	TYP(1)	MAX	
t_{pd}	Propagation delay time, t_{PHL} or t_{PLH} (see Figure 2 and Figure 3)		2.5		13.5	ns
$t_{sk(p)}$	Pulse skew, $\|t_{PHL} - t_{PLH}\|$				5	ns
t_f	Fall time	S1 to B, See Figure 3		4		ns
t_r	Rise time	See Figure 3		8		ns
t_{en}	Enable time, control inputs to active output				50	ns
t_{dis}	Disable time, control inputs to high-impedance output				225	ns
t_{PHZ}	Propagation delay time, high-level to high-impedance output	See Figure 6 and Figure 7		17	225	ns
t_{PLZ}	Propagation delay time, low-level to high-impedance output			25	225	ns
t_{PZH}	Propagation delay time, high-impedance to high-level output			17	50	ns
t_{PZL}	Propagation delay time, high-impedance to low-level output			17	50	ns

(1) All typical values are at V_{CC} = 5 V, T_A = 25°C.

RECEIVER SWITCHING CHARACTERISTICS

over recommended operating conditions (unless otherwise noted)

PARAMETER		TEST CONDITIONS	SN65HVD09			UNIT
			MIN	TYP(1)	MAX	
t_{pd}	Propagation delay time, t_{PHL} or t_{PLH} (see Figure 2 and Figure 3)		8		14.5	ns
$t_{sk(lim)}$	Skew limit, maximum t_{pd} – minimum t_{pd} (2)				5	ns
$t_{sk(p)}$	Pulse skew, $\|t_{PHL} - t_{PLH}\|$			0.6	5	ns
t_t	Transition time (t_r or t_f)	See Figure 5		2		ns
t_{en}	Enable time, control inputs to active output			31		ns
t_{dis}	Disable time, control inputs to high-impedance output			41		ns
t_{PHZ}	Propagation delay time, high-level to high-impedance output	See Figure 8 and Figure 9		34		ns
t_{PLZ}	Propagation delay time, low-level to high-impedance output			14		ns
t_{PZH}	Propagation delay time, high-impedance to high-level output			30		ns
t_{PZL}	Propagation delay time, high-impedance to low-level output			30		ns

(1) All typical values are at V_{CC} = 5 V, T_A = 25°C.
(2) This parameter is applicable at one V_{CC} and operating temperature within the recommended operating conditions and to any two devices.

Copyright © 2011, Texas Instruments Incorporated

PARAMETER MEASUREMENT INFORMATION


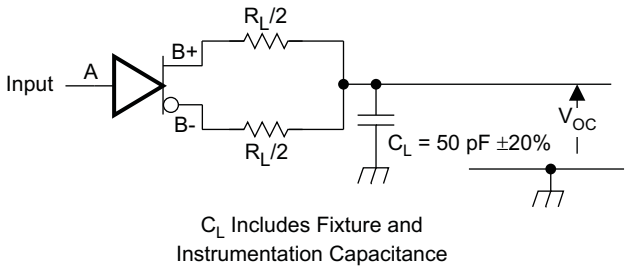


Figure 1. Driver Test Circuit, RS-422 and RS-485 Loading

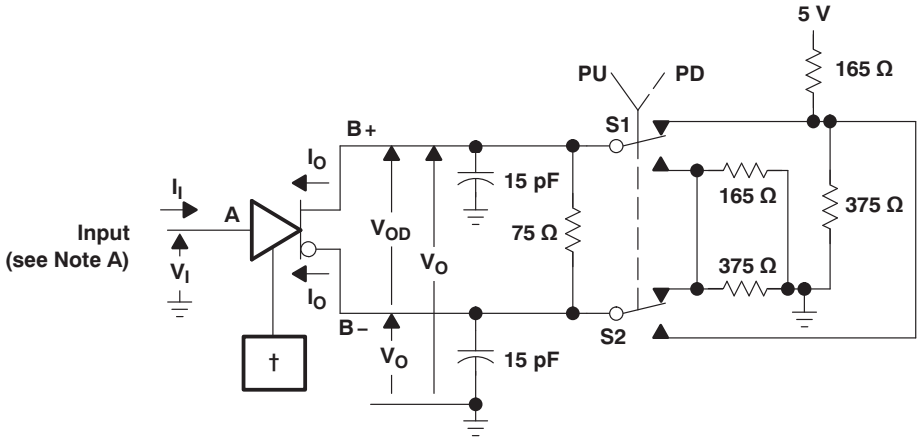

† CDEO and DE/$\overline{RE}$ are at 2 V, BSR is at 0.8V, and all others are open.
‡ All nine drivers are enabled, similarly loaded, and switching.

Figure 2. Driver Test Circuit, Pull-Up and Pull-Down Loading‡


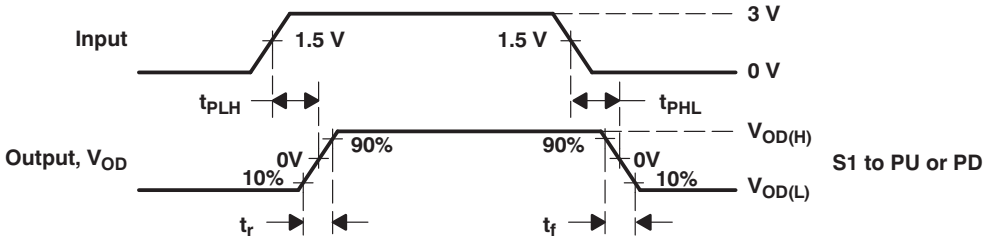


Figure 3. Driver Delay and Transition Time Test Waveforms

Copyright © 2011, Texas Instruments Incorporated

PARAMETER MEASUREMENT INFORMATION (continued)

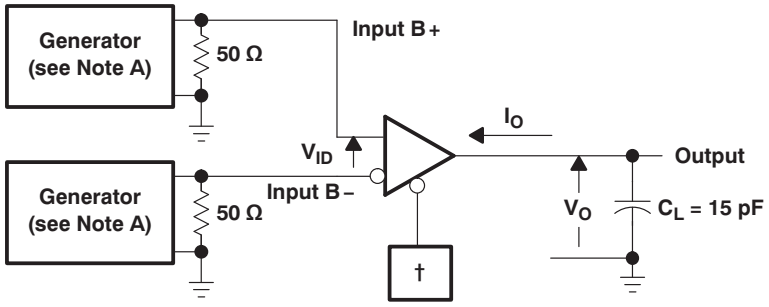

† CDEO, CDE1, CDE2, BSR, CRE, and DE/$\overline{RE}$ at 0.8 V

‡ All nine receivers are enabled and switching.

Figure 4. Receiver Propagation Delay and Transition Time Test Circuit

A. All input pulses are supplied by a generator having the following characteristics: t_r ≤ 6 ns, t_f ≤ 6 ns, PRR ≤ 1 MHz, duty cycle = 50%, Z_O = 50 Ω.

B. All resistances are in Ω and ±5%, unless otherwise indicated.

C. All capacitances are in pF and ±10%, unless otherwise indicated.

D. All indicated voltages are ±10 mV.


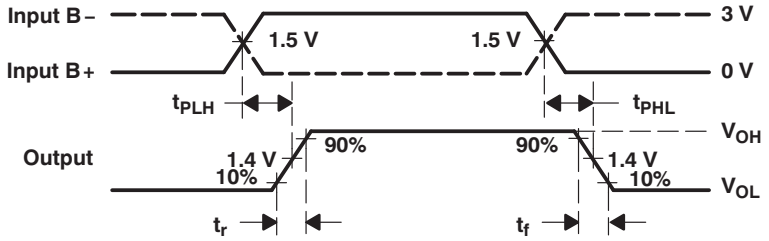


Figure 5. Receiver Delay and Transition Time Waveforms

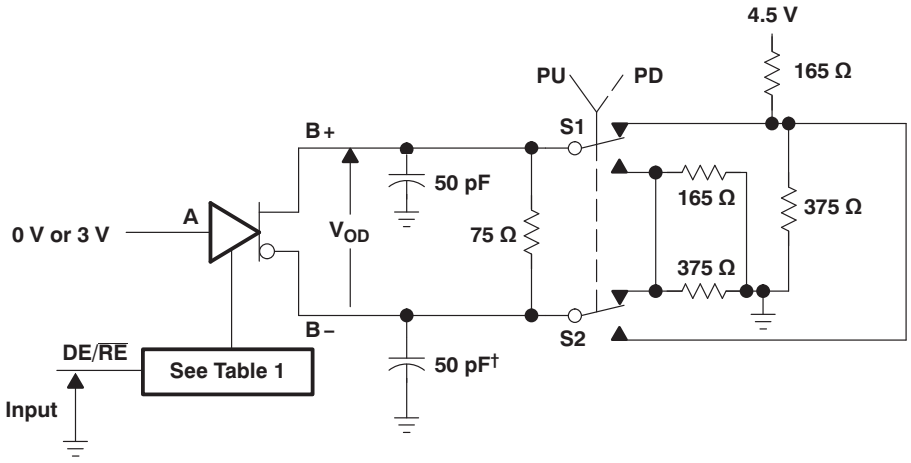

† Includes probe and jig capacitance in two places.

Figure 6. Driver Enable and Disable Time Test Circuit

Table 1. Enabling for Driver Enable and Disable Time

DRIVER	BSR	CDE0	CDE1	CDE2	$\overline{CRE}$
1–8	H	H	L	L	X
9	L	H	H	H	H

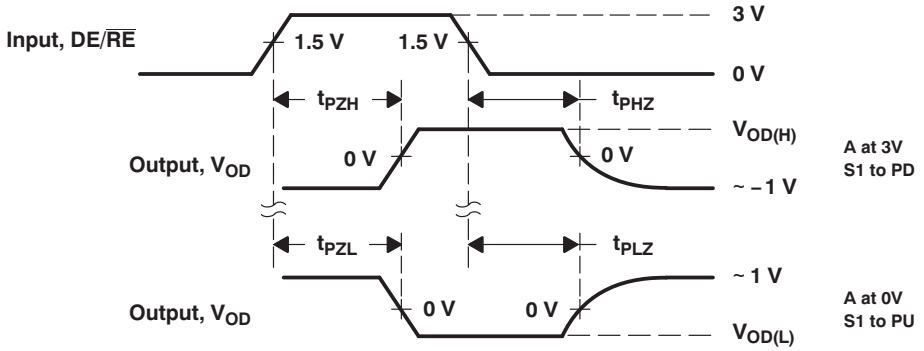



Figure 7. Driver Enable Time Waveforms

NOTES: A. All input pulses are supplied by a generator having the following characteristics: $t_r \le 6$ ns, $t_f \le 6$ ns, PRR ≤ 1 MHz, duty cycle = 50%, $Z_O = 50\ \Omega$.

B. All resistances are in Ω and ±5%, unless otherwise indicated.

C. All capacitances are in pF and ±10%, unless otherwise indicated.

D. All indicated voltages are ±10 mV.

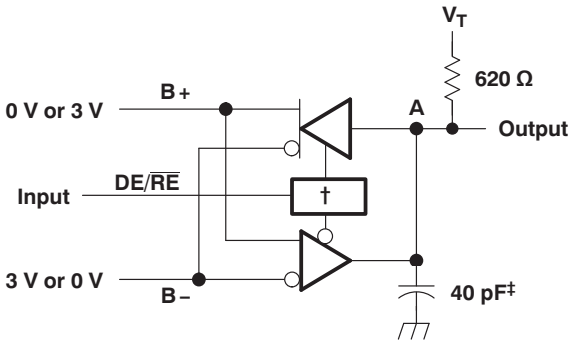

† CDEO is high, CDE1, CDE2, BSR, and $\overline{CRE}$ are low, all others are open.

‡ Includes probe and jig capacitance.

Figure 8. Receiver Enable and Disable Time Test Circuit

Copyright © 2011, Texas Instruments Incorporated

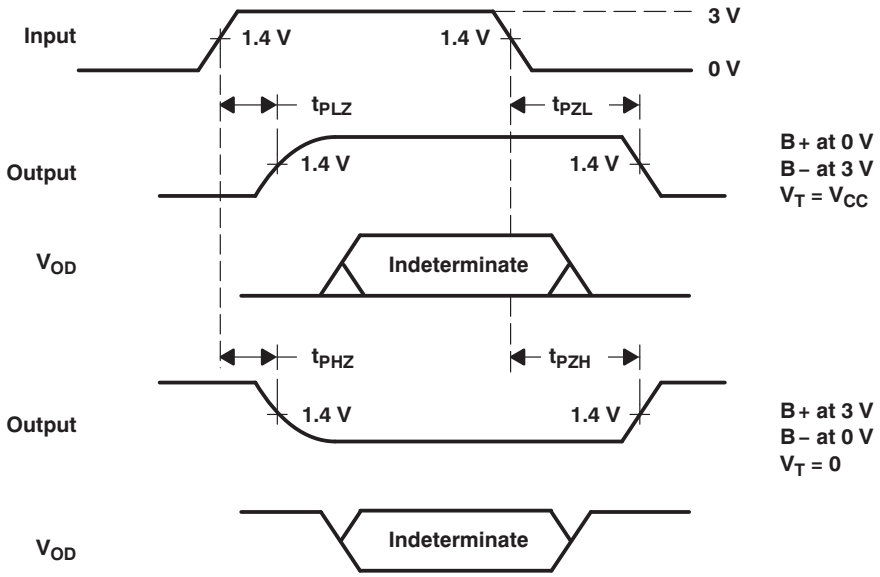


Figure 9. Receiver Enable and Disable Time Waveforms

NOTES: A. All input pulses are supplied by a generator having the following characteristics: $t_r \leq 6$ ns, $t_f \leq 6$ ns, PRR ≤ 1 MHz, duty cycle = 50%, $Z_O = 50\ \Omega$.

B. All resistances are in Ω and ±5%, unless otherwise indicated.

C. All capacitances are in pF and ±10%, unless otherwise indicated.

D. All indicated voltages are ±10 mV.

TYPICAL CHARACTERISTICS

AVERAGE SUPPLY CURRENT vs FREQUENCY

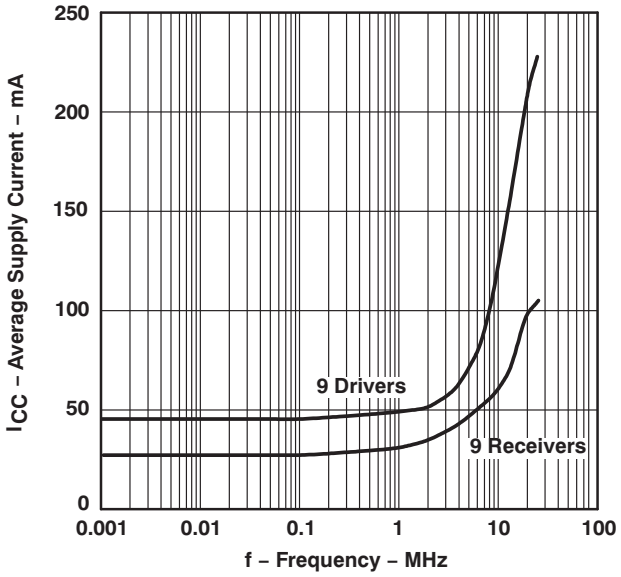


Figure 10.

LOGIC INPUT CURRENT vs INPUT VOLTAGE

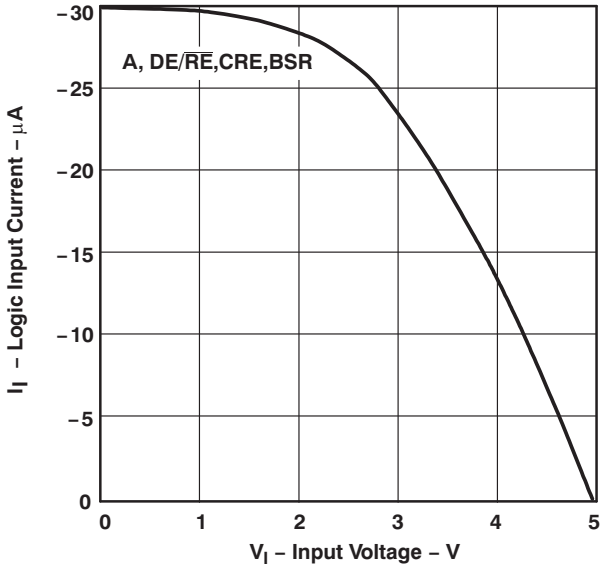


Figure 11.

BUS INPUT CURRENT vs INPUT VOLTAGE

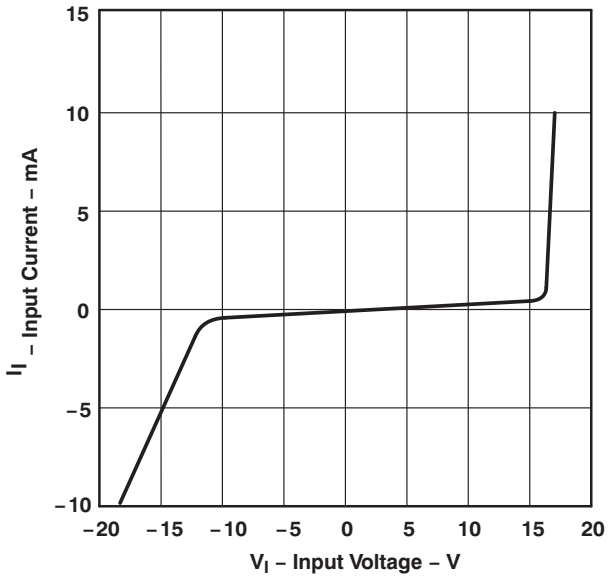


Figure 12.

DRIVER LOW-LEVEL OUTPUT VOLTAGE vs LOW-LEVEL OUTPUT CURRENT

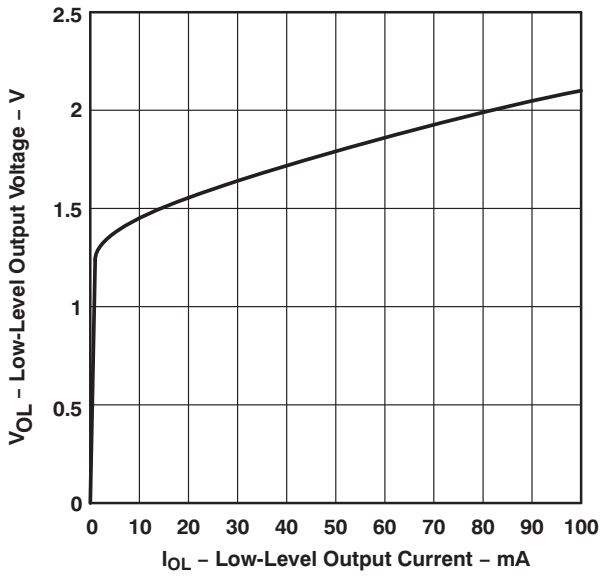


Figure 13.

Copyright © 2011, Texas Instruments Incorporated

TYPICAL CHARACTERISTICS (continued)

DRIVER
HIGH-LEVEL OUTPUT VOLTAGE
vs
HIGH-LEVEL OUTPUT CURRENT

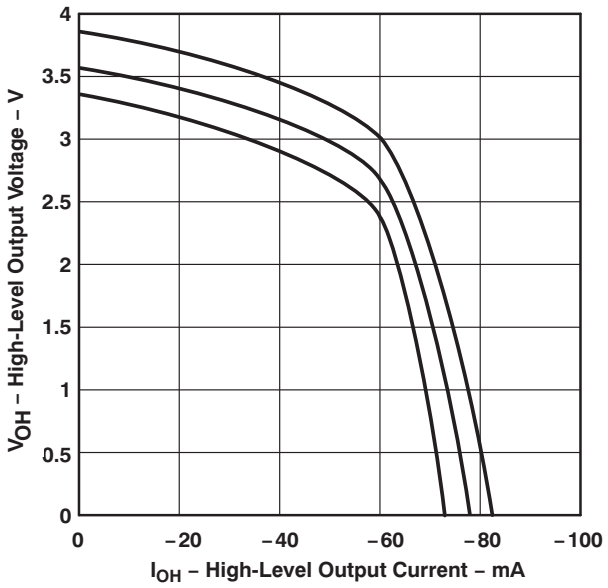


Figure 14.

DRIVER
DIFFERENTIAL OUTPUT VOLTAGE
vs
TEMPERATURE

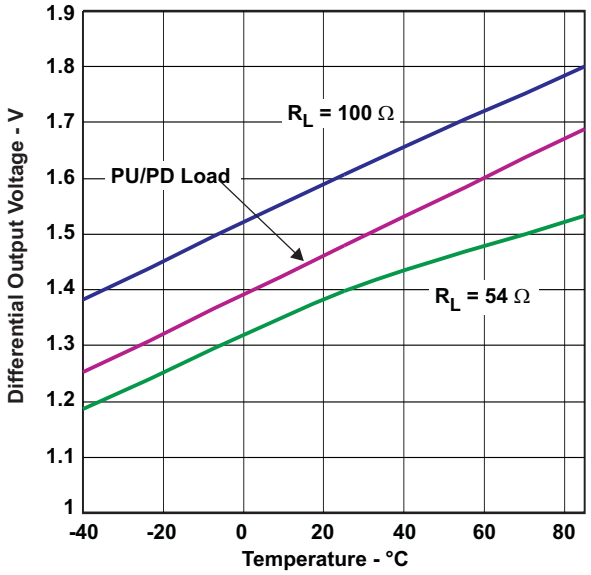


Figure 15.

RECEIVER
PROPAGATION DELAY TIME
vs
TEMPERATURE

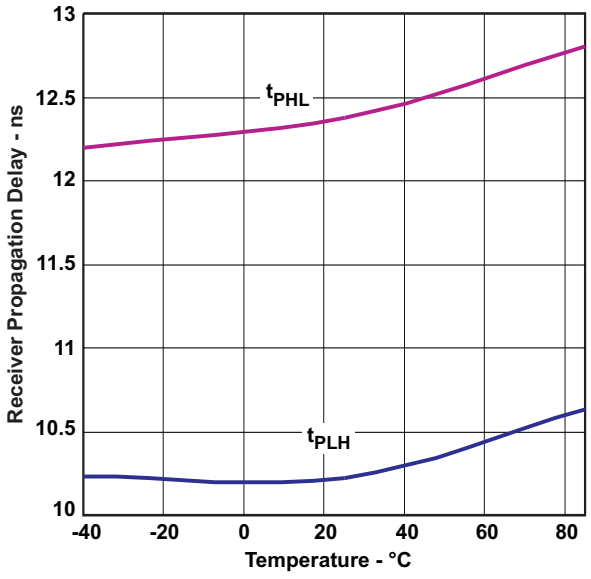


Figure 16.

DRIVER
PROPAGATION DELAY TIME
vs
TEMPERATURE

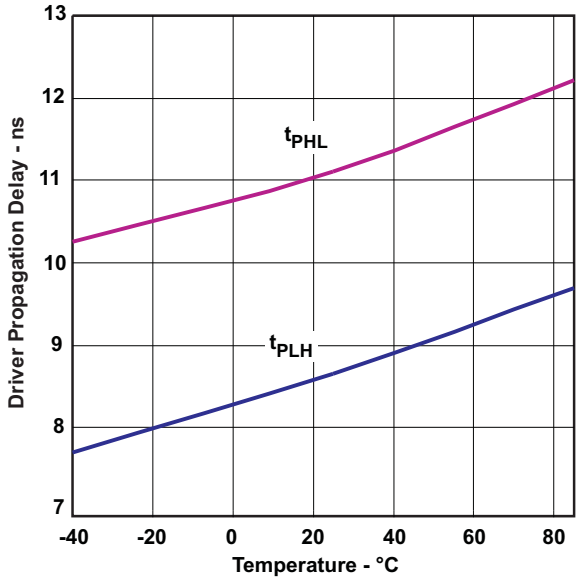


Figure 17.

TYPICAL CHARACTERISTICS (continued)


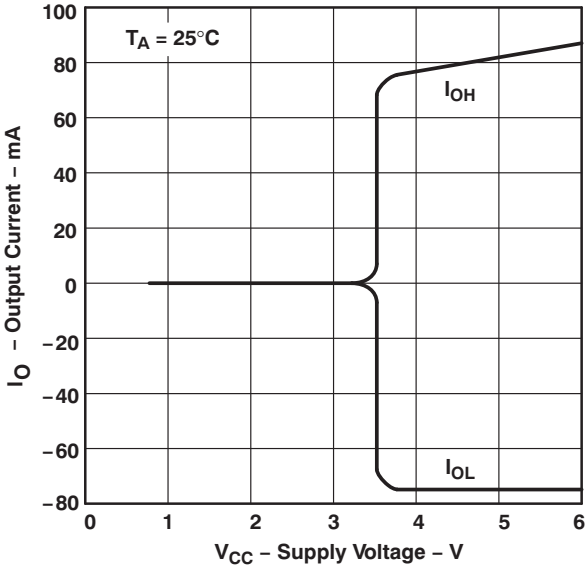


Figure 18.

Copyright © 2011, Texas Instruments Incorporated

TYPICAL CHARACTERISTICS (continued)


SCHEMATICS OF INPUTS AND OUTPUTS

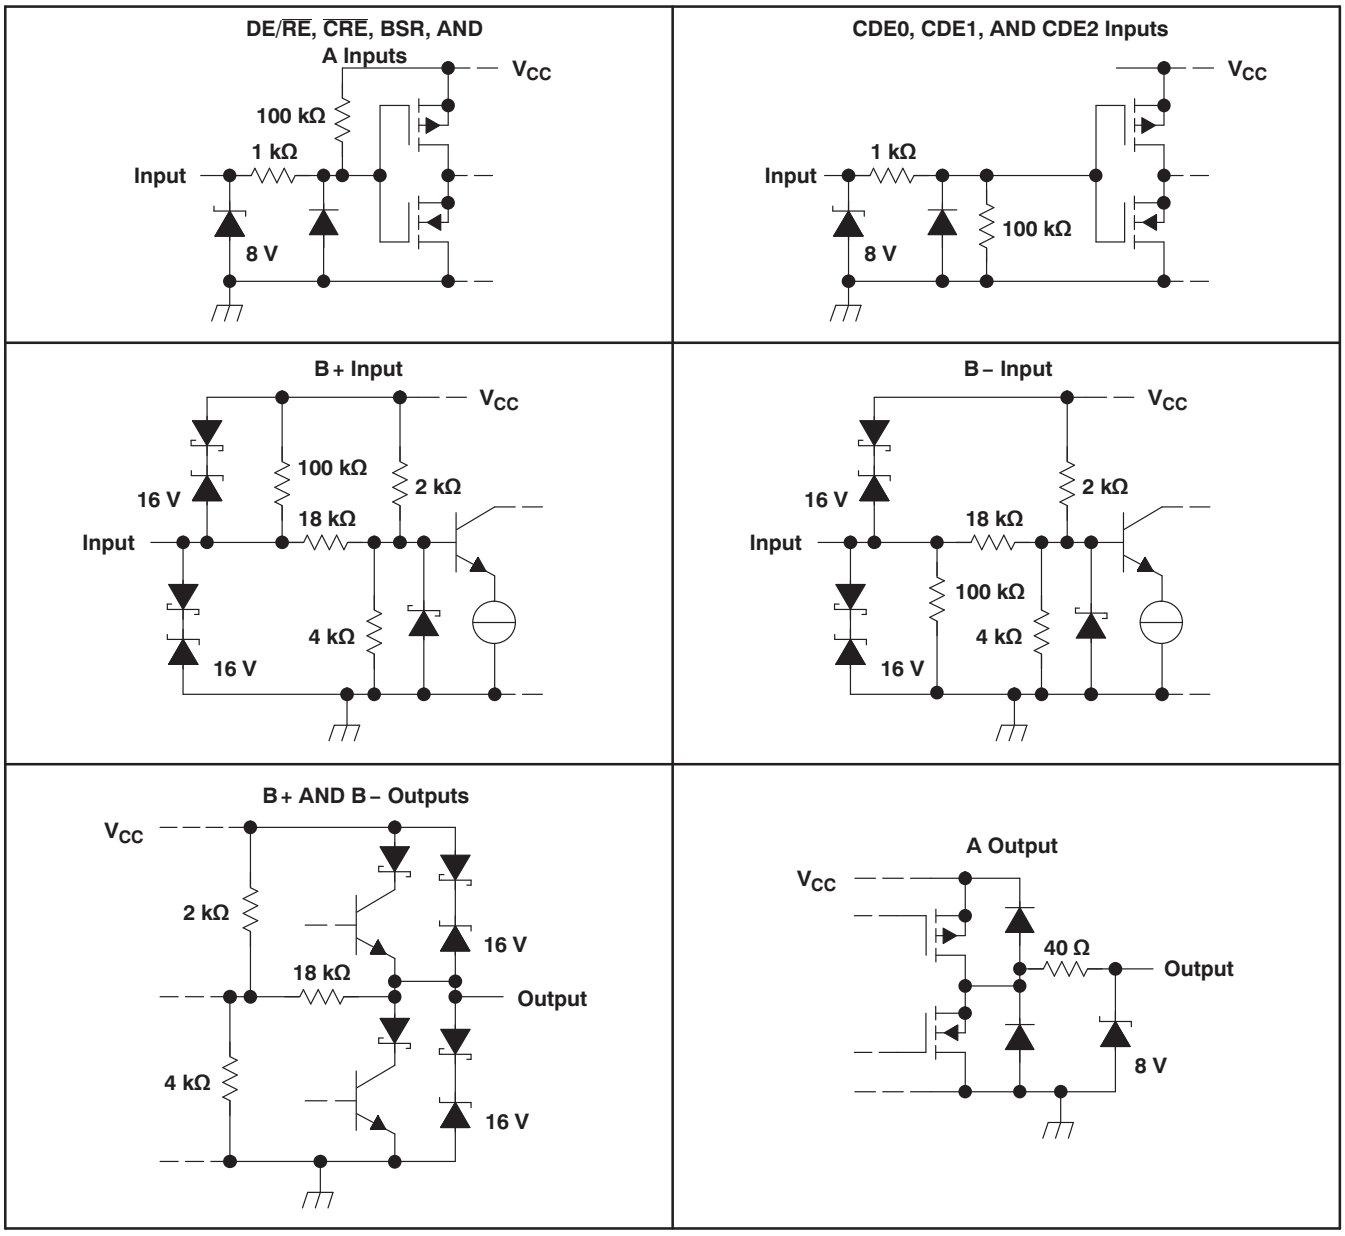

APPLICATION INFORMATION

FUNCTION TABLES

RECEIVER




INPUTS		OUTPUT
B+[1]	B–[1]	A
L	H	L
H	L	H

DRIVER




INPUT	OUTPUTS	
A	B+	B–
L	L	H
H	H	L

TRANSCEIVER

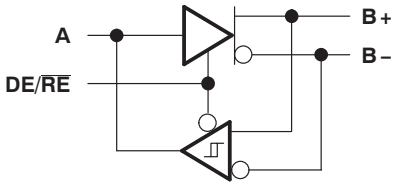


INPUTS				OUTPUTS		
DE/RE	A	B+[1]	B–[1]	A	B+	B–
L	–	L	H	L	–	–
L	–	H	L	H	–	–
H	L	–	–	–	L	H
H	H	–	–	–	H	L

DRIVER WITH ENABLE




INPUTS		OUTPUTS	
DE/RE	A	B+	B–
L	L	Z	Z
L	H	Z	Z
H	L	L	H
H	H	H	L

WIRED-OR DRIVER

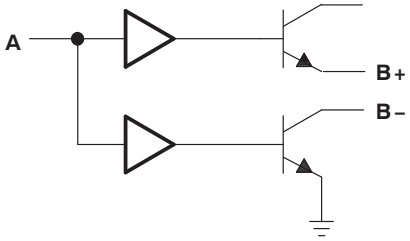

INPUT	OUTPUTS	
A	B+	B–
L	Z	Z
H	H	L

TWO-ENABLE INPUT DRIVER

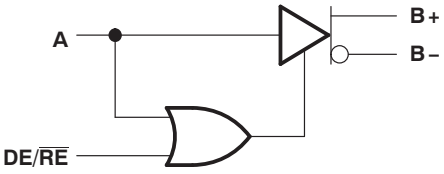


INPUTS		OUTPUTS	
DE/RE	A	B+	B–
L	L	Z	Z
L	H	H	L
H	L	L	H
H	H	H	L

NOTE: H = high level, L = low level, X = irrelevant, Z = high impedance (off)

(1) An H in this column represents a voltage of 200 mV or higher than the other bus input. An L represents a voltage of 200 mV or lower than the other bus input. Any voltage less than 200 mV results in an indeterminate receiver output.

Copyright © 2011, Texas Instruments Incorporated

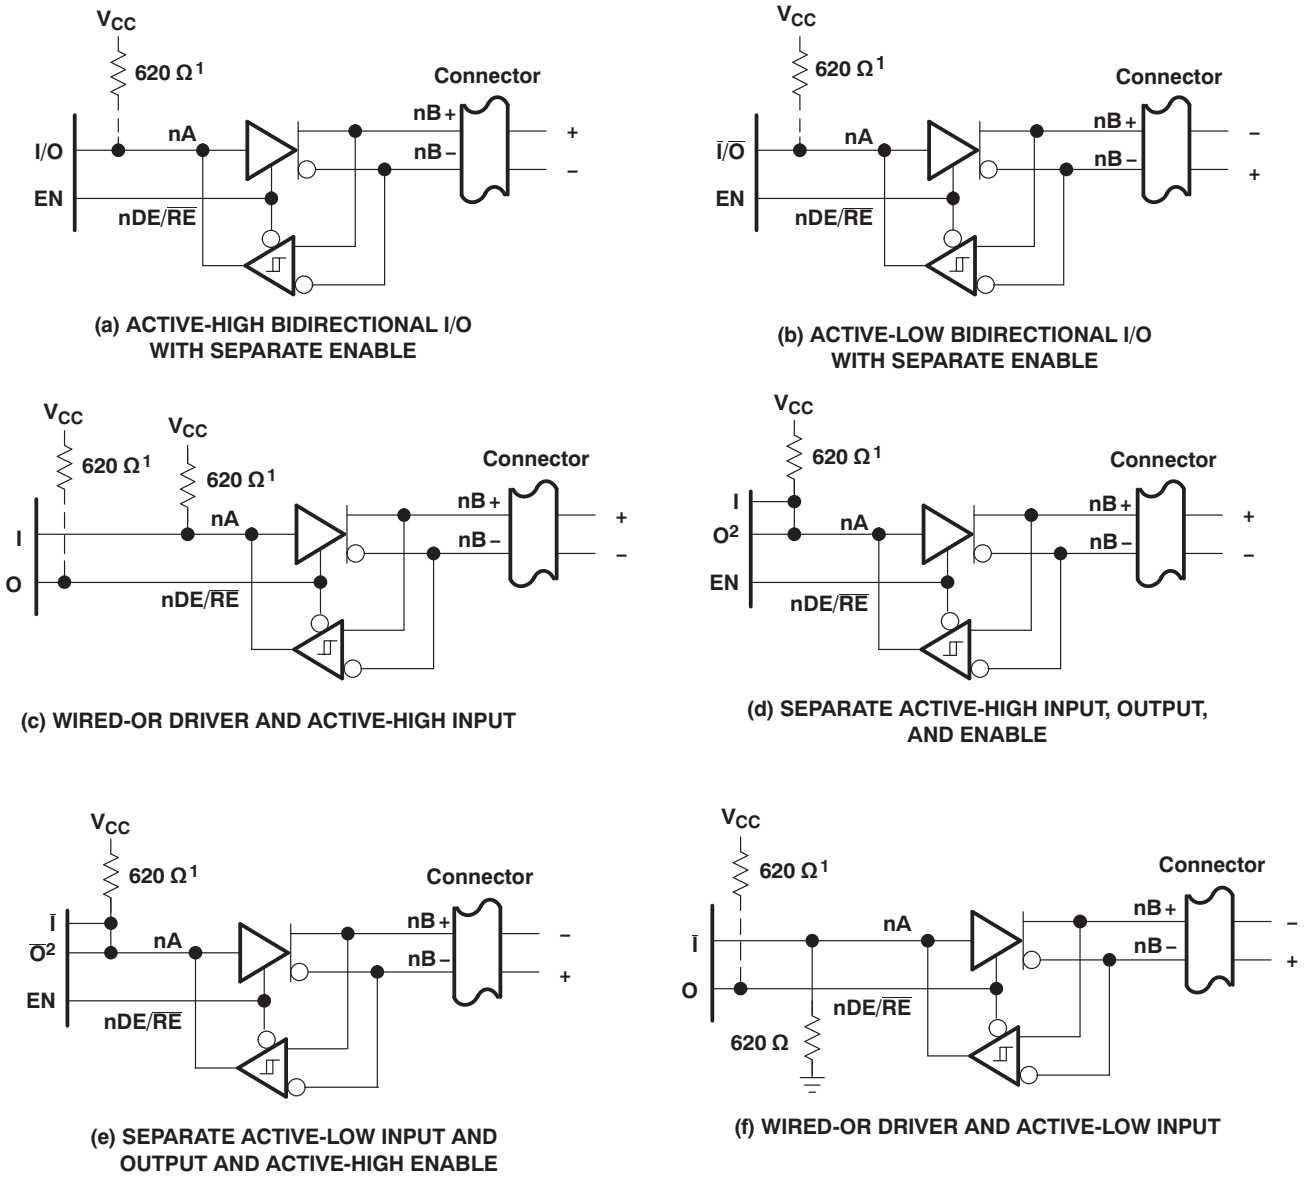

1: When 0 is open drain
2: Must be open-drain or 3-state output

(1) When 0 is open drain

(2) Must be open-drain or 3-state output

NOTE: The BSR, $\overline{CRE}$, A, and DE/$\overline{RE}$ inputs have internal pullup resistors. CDE0, CDE1, and CDE2 have internal pulldown resistors.

Figure 19. Typical Transceiver Connections

Copyright © 2011, Texas Instruments Incorporated

CHANNEL LOGIC CONFIGURATIONS WITH CONTROL INPUT LOGIC

The following logic diagrams show the positive-logic representation for all combinations of control inputs. The control inputs are from MSB to LSB; the BSR, CDE0, CDE1, CDE2, and $\overline{\text{CRE}}$ bit values are shown below the diagrams. Channel 1 is at the top of the logic diagrams; channel 9 is at the bottom of the logic diagrams.

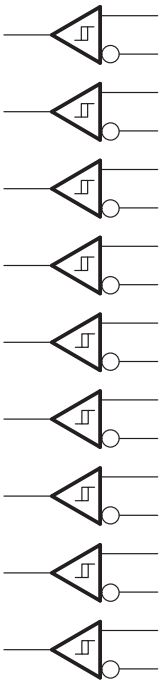


Figure 19. 00000

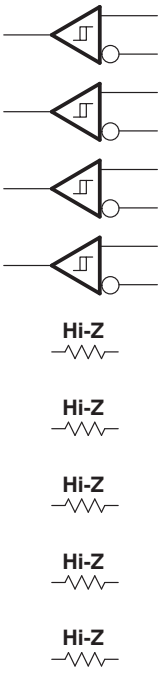


Figure 20. 00001

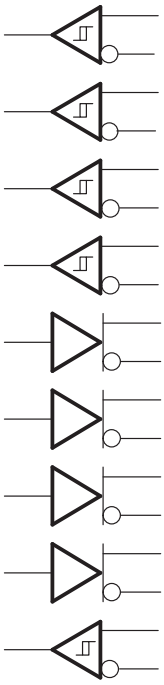


Figure 21. 00010

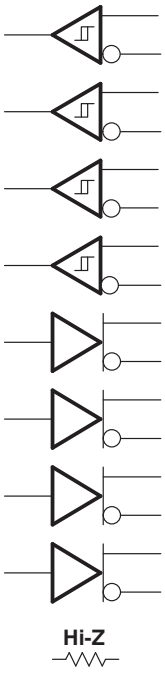


Figure 22. 00011

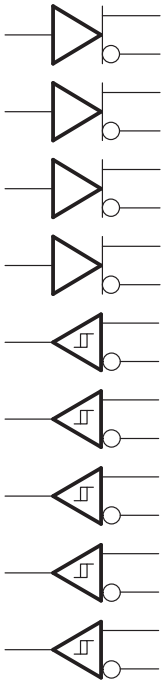


Figure 23. 00100

Copyright © 2011, Texas Instruments Incorporated

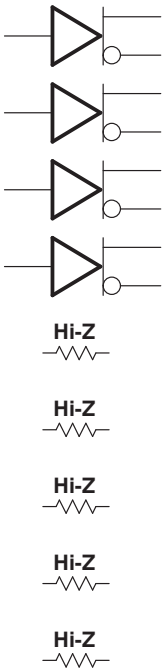


Figure 24. 00101

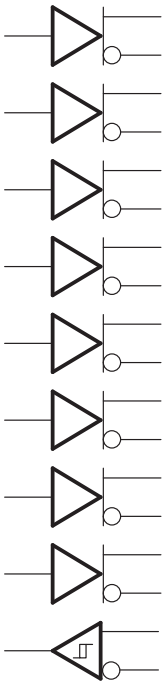


Figure 25. 00110

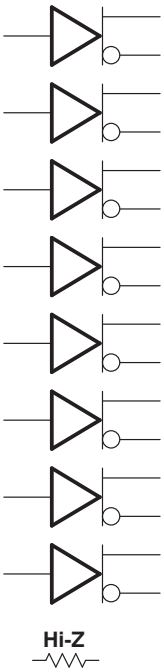


Figure 26. 00111

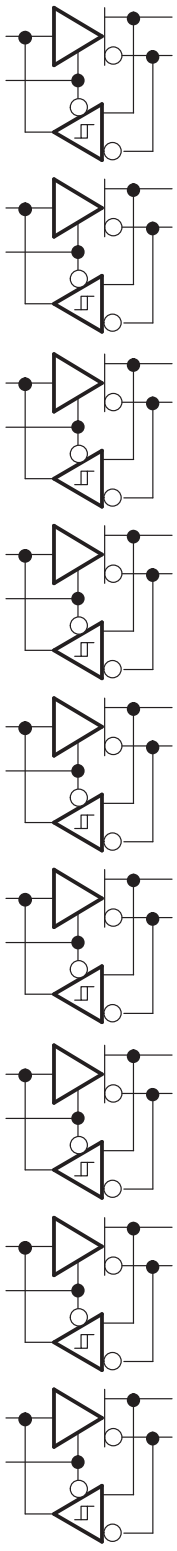


Figure 27. 01000

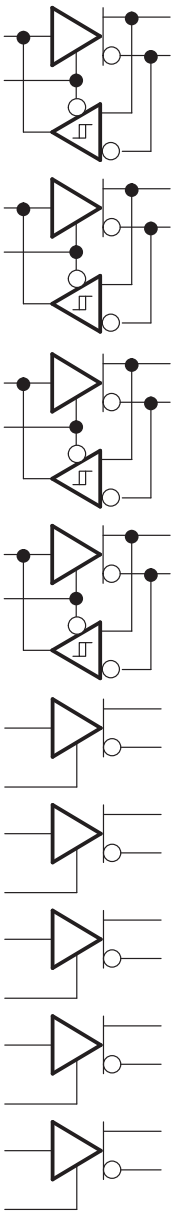


Figure 28. 01001

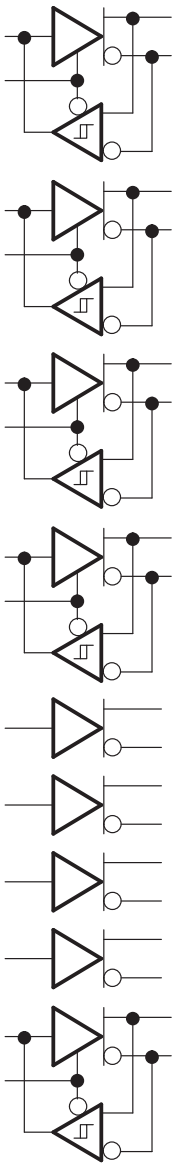


Figure 29. 01010

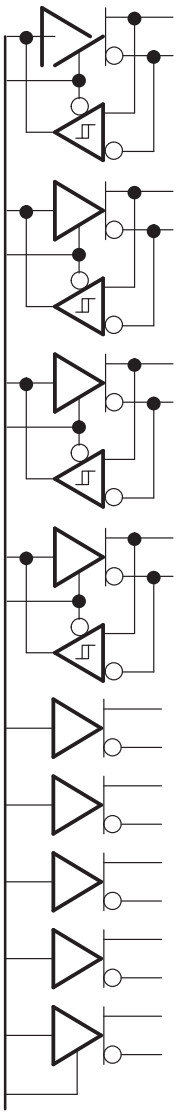


Figure 30. 01011

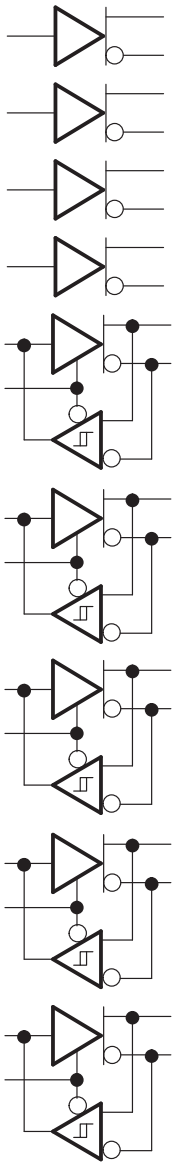


Figure 31. 01100

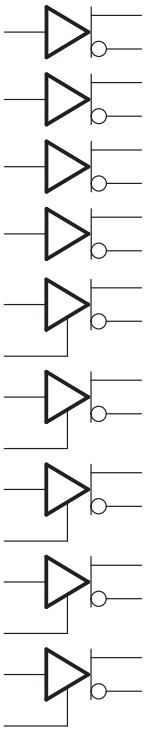


Figure 32. 01101

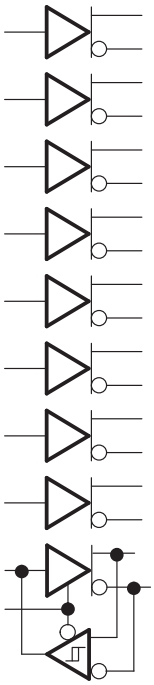


Figure 33. 01110

Copyright © 2011, Texas Instruments Incorporated

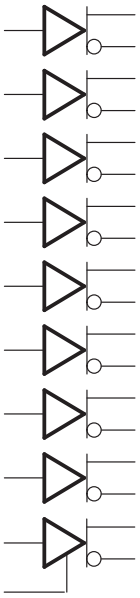


Figure 34. 01111



Figure 35. 10000 and 10001

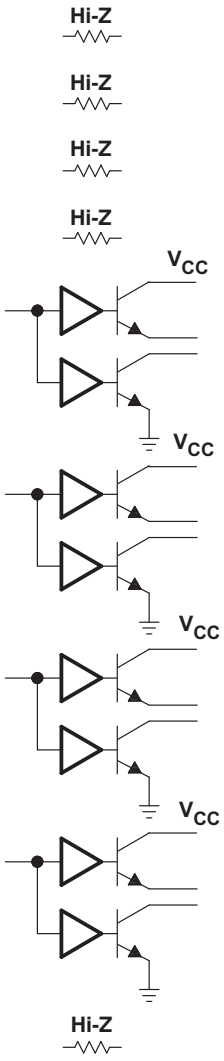


Figure 36. 10010 and 10011

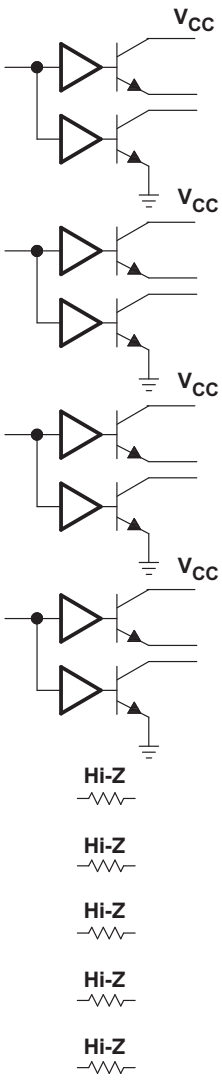


Figure 37. 10100 and 10101

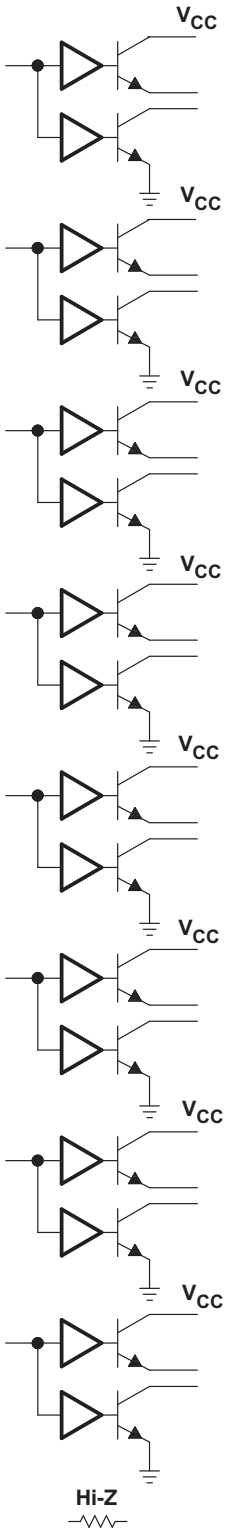


Figure 38. 10110 and 10111

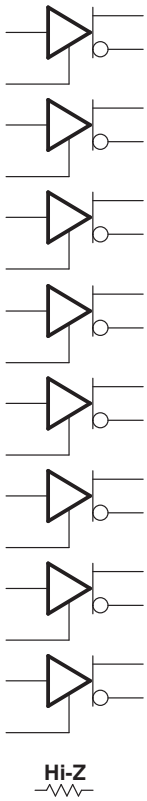


Figure 39. 11000 and 11001

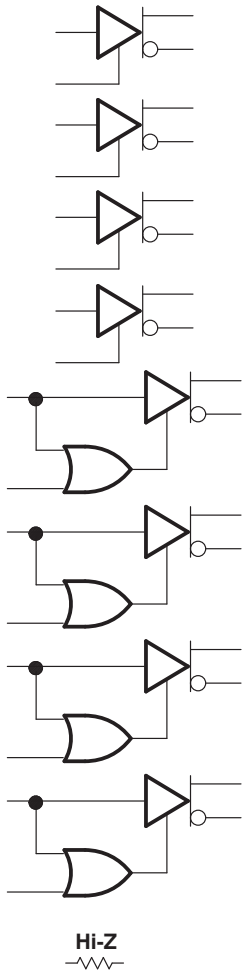


Figure 40. 11010 and 11011

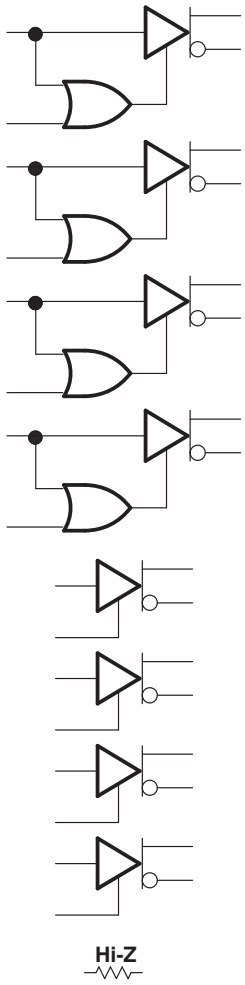


Figure 41. 11100 and 11101

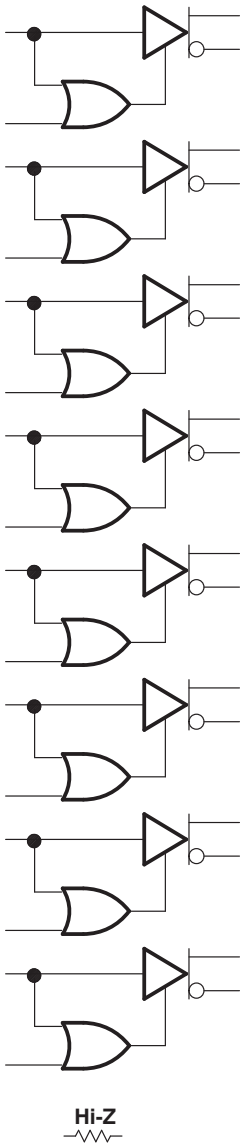


Figure 42. 11110 and 11111

Copyright © 2011, Texas Instruments Incorporated

PACKAGING INFORMATION

Orderable part number	Status (1)	Material type (2)	Package | Pins	Package qty | Carrier	RoHS (3)	Lead finish/ Ball material (4)	MSL rating/ Peak reflow (5)	Op temp (°C)	Part marking (6)
SN65HVD09IDGGREP	Active	Production	TSSOP (DGG) | 56	2000 | LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 85	SN65HVD09EP
SN65HVD09IDGGREP.A	Active	Production	TSSOP (DGG) | 56	2000 | LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 85	SN65HVD09EP
V62/12607-01XE	Active	Production	TSSOP (DGG) | 56	2000 | LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 85	SN65HVD09EP

(1) **Status:** For more details on status, see our product life cycle.

(2) **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

(3) **RoHS values:** Yes, No, RoHS Exempt. See the TI RoHS Statement for additional information and value definition.

(4) **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

(5) **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

(6) **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

OTHER QUALIFIED VERSIONS OF SN65HVD09-EP :


- Catalog : SN65HVD09

NOTE: Qualified Version Definitions:


- Catalog - TI's standard catalog product

TAPE AND REEL INFORMATION

REEL DIMENSIONS

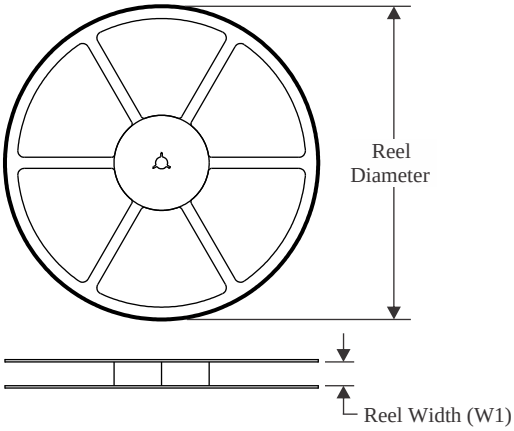


TAPE DIMENSIONS

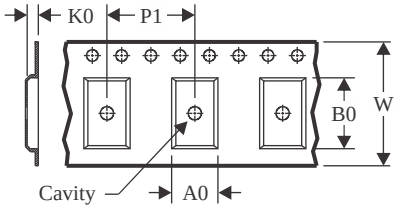

A0	Dimension designed to accommodate the component width
B0	Dimension designed to accommodate the component length
K0	Dimension designed to accommodate the component thickness
W	Overall width of the carrier tape
P1	Pitch between successive cavity centers


QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE

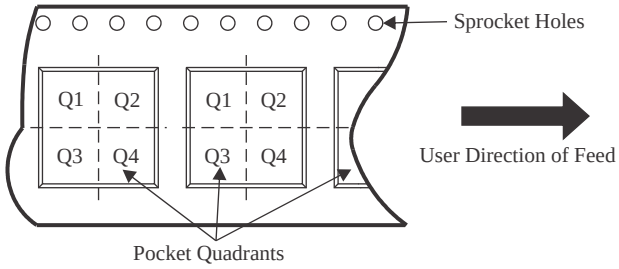

*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
SN65HVD09IDGGREP	TSSOP	DGG	56	2000	330.0	24.4	8.9	14.7	1.4	12.0	24.0	Q1

TAPE AND REEL BOX DIMENSIONS

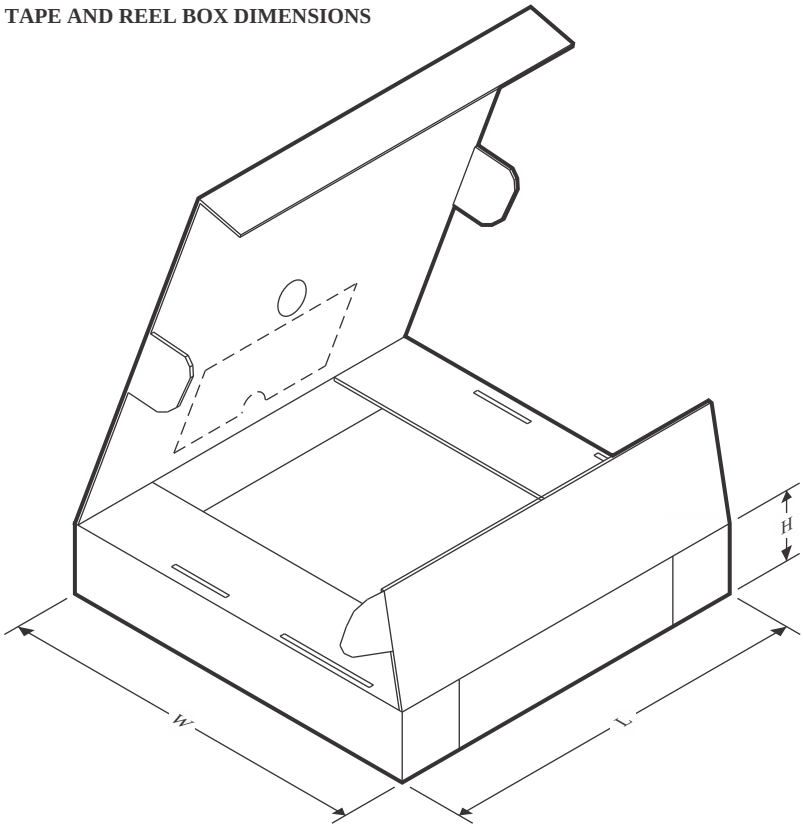

*All dimensions are nominal


Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
SN65HVD09IDGGREP	TSSOP	DGG	56	2000	356.0	356.0	45.0

PACKAGE OUTLINE

DGG0056A


TSSOP - 1.2 mm max height

SMALL OUTLINE PACKAGE

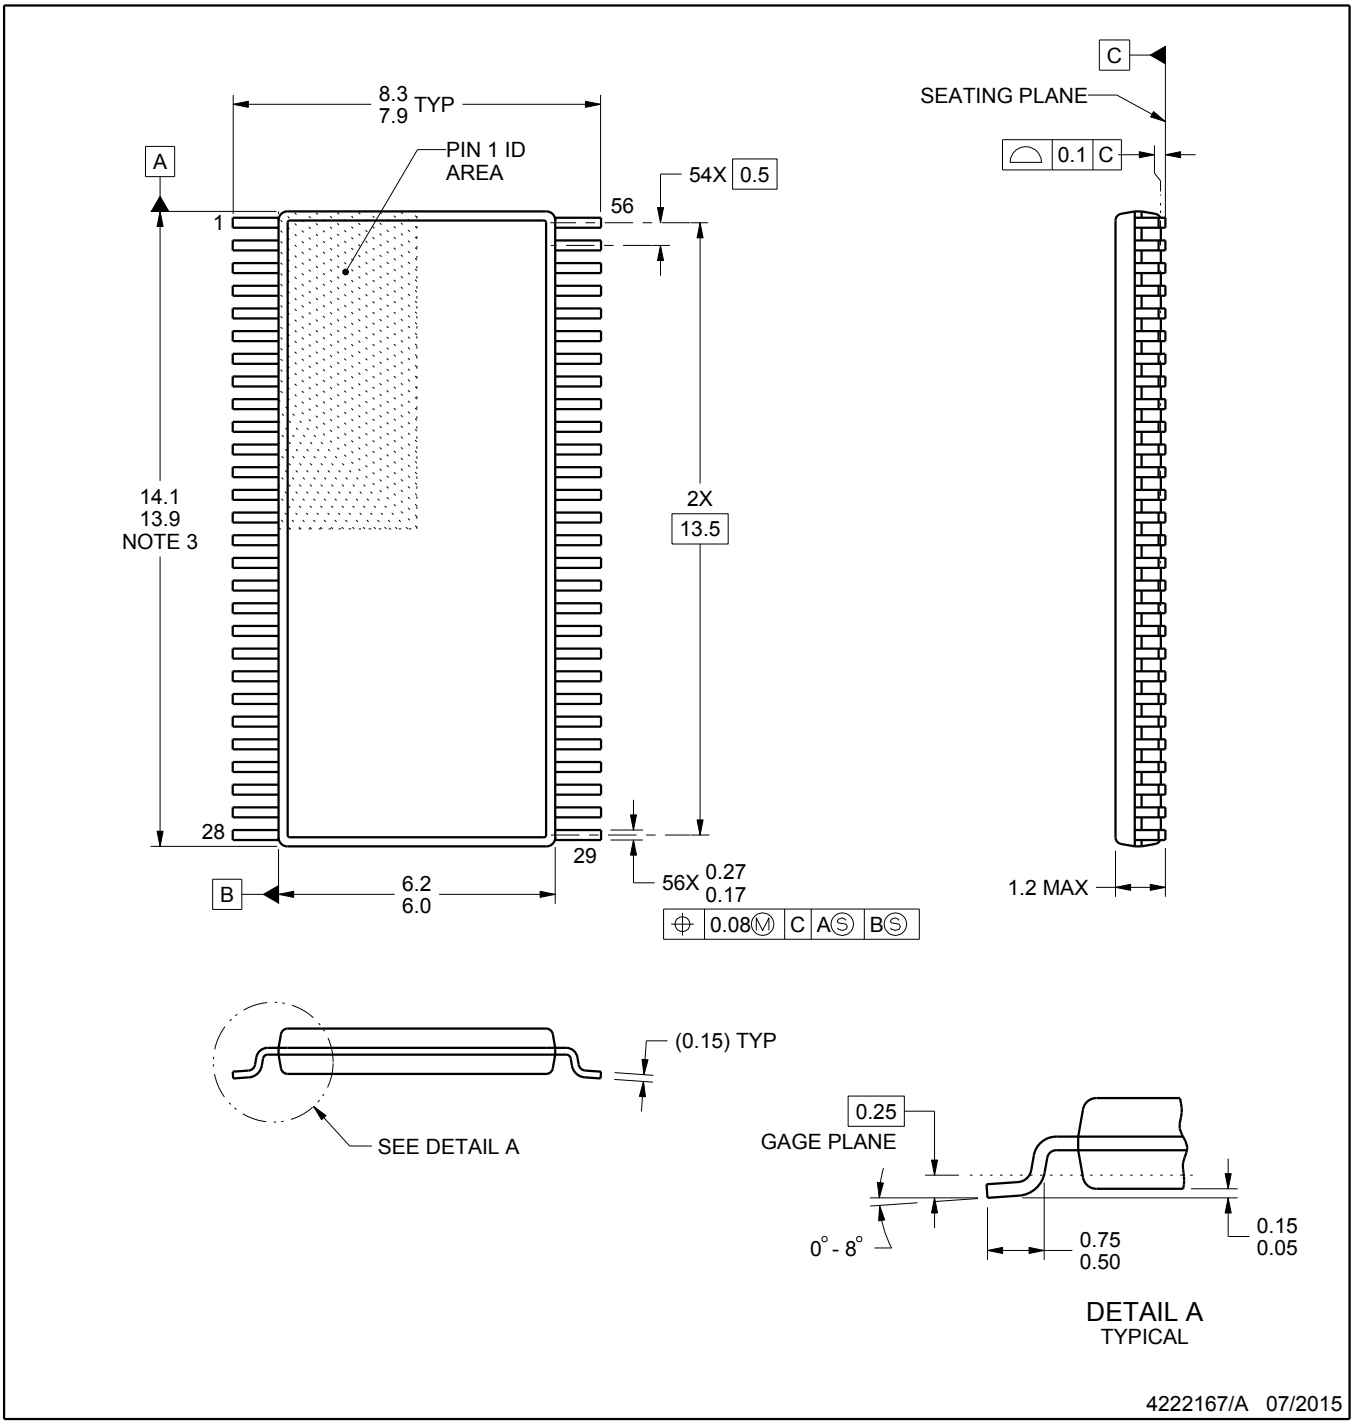


NOTES:

1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.15 mm per side.
4. Reference JEDEC registration MO-153.

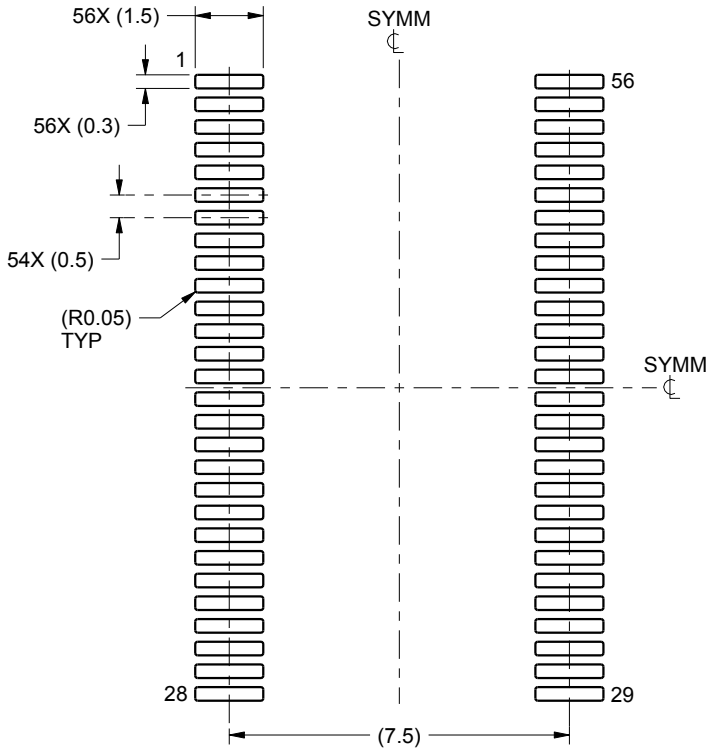

LAND PATTERN EXAMPLE
SCALE:6X

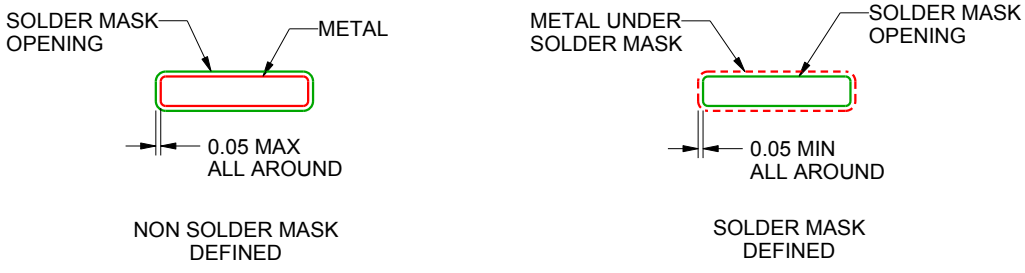


SOLDER MASK DETAILS

4222167/A 07/2015

NOTES: (continued)

5. Publication IPC-7351 may have alternate designs.
6. Solder mask tolerances between and around signal pads can vary based on board fabrication site.

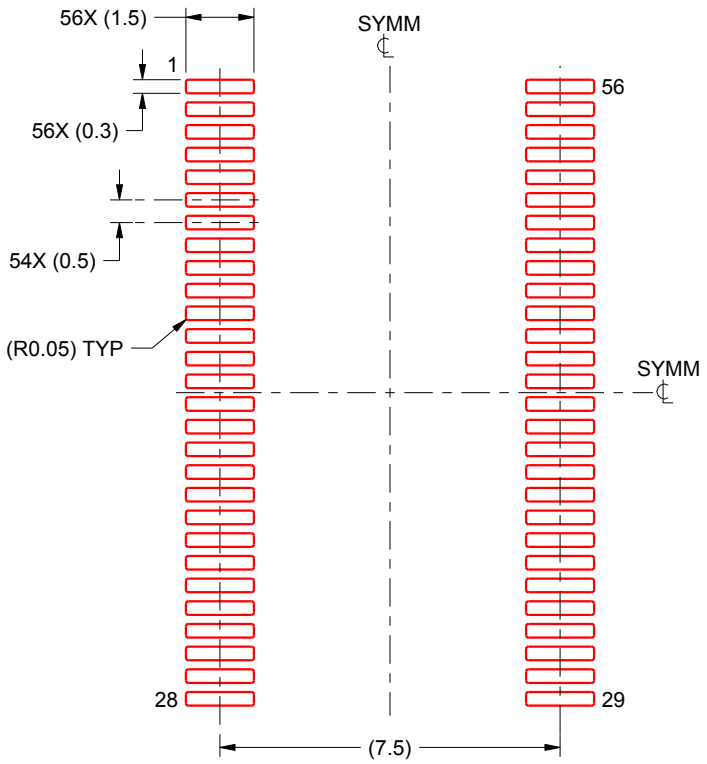

SOLDER PASTE EXAMPLE
BASED ON 0.125 mm THICK STENCIL
SCALE:6X

4222167/A 07/2015

NOTES: (continued)

7. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
8. Board assembly site may have different recommendations for stencil design.

IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES “AS IS” AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you fully indemnify TI and its representatives against any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI’s products are provided subject to TI’s Terms of Sale, TI’s General Quality Guidelines, or other applicable terms available either on ti.com or provided in conjunction with such TI products. TI’s provision of these resources does not expand or otherwise alter TI’s applicable warranties or warranty disclaimers for TI products. Unless TI explicitly designates a product as custom or customer-specified, TI products are standard, catalog, general purpose devices.

TI objects to and rejects any additional or different terms you may propose.

Copyright © 2025, Texas Instruments Incorporated

Last updated 10/2025