

DESCRIPTION: .900 CENTER DUAL PORT D-SUB FEMALE/FEMALE


	A	B	C
9	1.204	.984	.494
	30.6	25.0	12.55
15	1.535	1.312	.494
	39.0	33.3	12.55
25	2.078	1.850	.494
	52.8	47.0	12.55
37	2.724	2.500	.494
	69.2	63.5	12.55

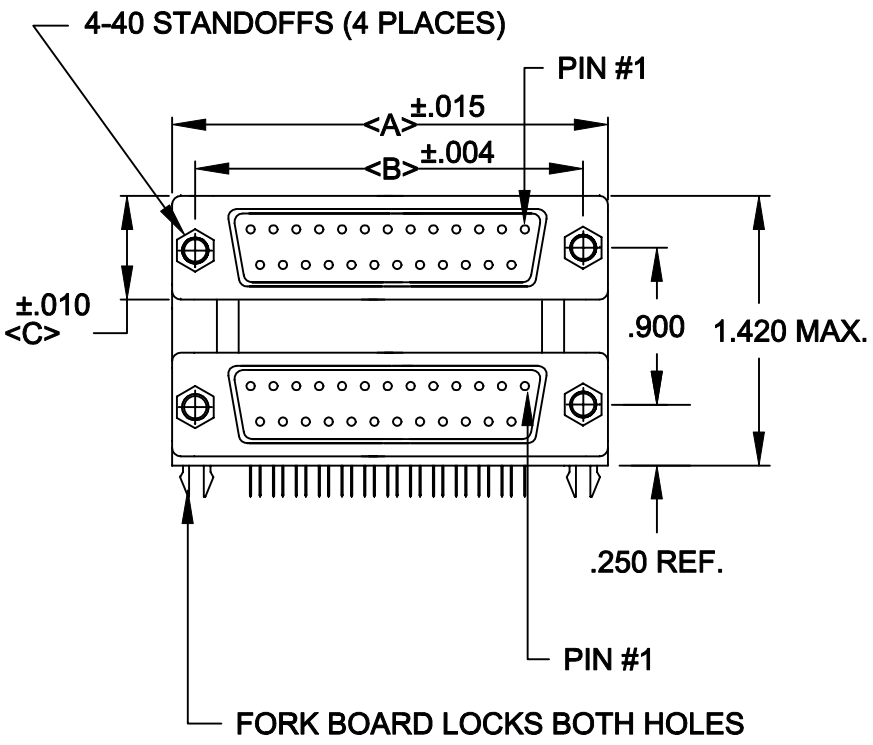

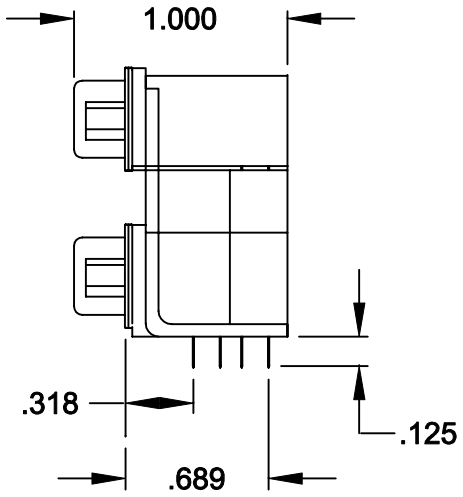

179-XXX-512-571

SERIES
POSITIONS
009
015
025
037
GENDER
61 = MALE OVER MALE
41 = MALE OVER FEMALE
51 = FEMALE OVER FEMALE
31 = FEMALE OVER MALE
SHELL PLATING
2 = TIN
HARDWARE OPTIONS
57 = 4-40 STANDOFFS/BOARD LOCKS
PLATING OPTIONS
01 = GOLD FLASH

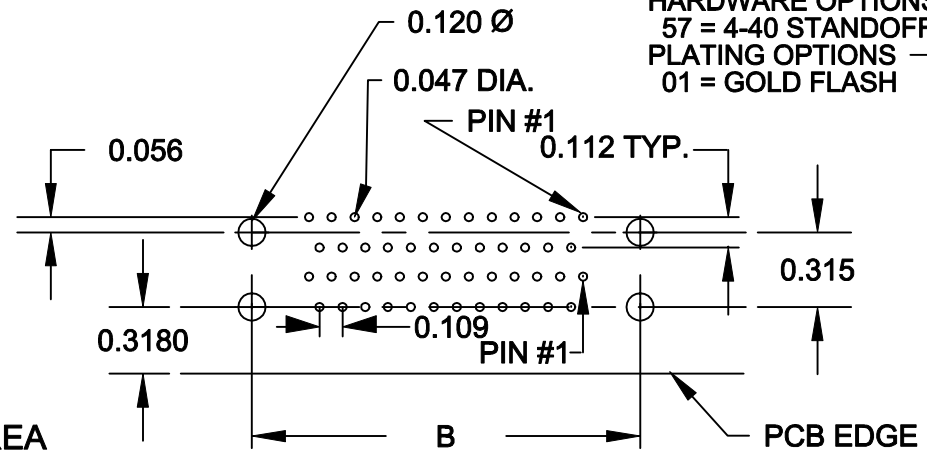

SPECIFICATIONS:

MATERIALS:
- SHELL: STEEL, TIN PLATED
- INSULATOR: UL 94V-0 RATED BLACK GLASS-FILLED POLYESTER
- CONTACTS: BRASS - GOLD FLASH IN MATING AREA TIN/LEAD ONSOLDER TAILS

ELECTRICALS:
- CURRENT RATING: 5 AMPS
- DIELECTRIC STRENGTH: 1000V AC RMS
- INSULTOR RESISTANCE: 1000 MOHMS MIN
- TEMPERATURE: -55°C TO +105°C

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OF SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN: PAM JENKINS	DATE: 9-24-98
CHECKED:	DATE:
SCALE: 1:1	SHEET 1 OF 1
REV 8	
DWG NO. 179-XXX-512-571	

NorComp