
DESCRIPTION: MALE // HD DSUB // CRIMP AND POKE

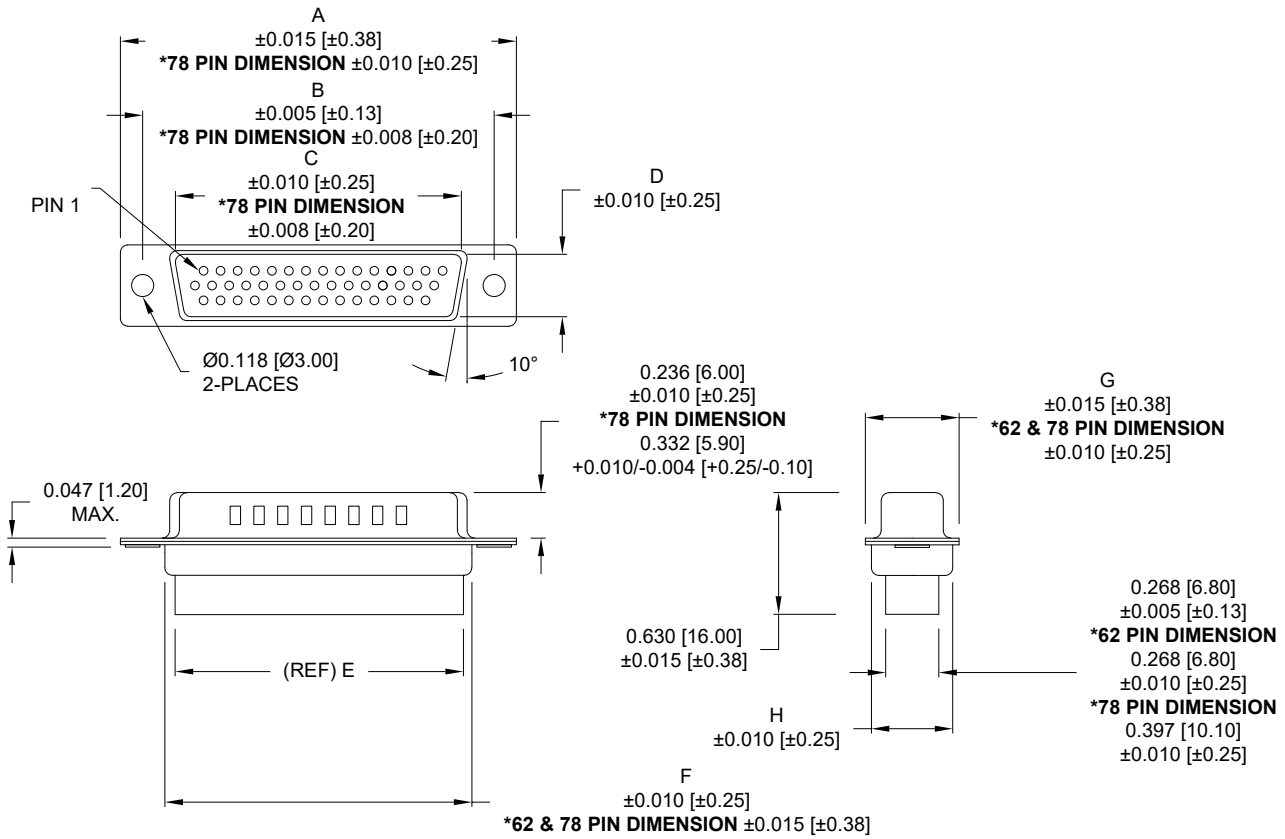

			DIMENSIONS							
	No. OF PINS	UNITS	A	B	C	D	E	F	G	H
	15	inch	1.213	0.984	0.666	0.323	0.610	0.759	0.494	0.421
		mm	30.81	24.99	16.92	8.20	15.50	19.28	12.55	10.70
	26	inch	1.541	1.312	0.994	0.323	0.964	1.083	0.494	0.421
		mm	39.14	33.32	25.25	8.20	24.50	27.51	12.55	10.70
	44	inch	2.088	1.852	1.534	0.323	1.494	1.618	0.494	0.421
		mm	53.04	47.04	38.96	8.20	37.95	41.10	12.55	10.70
	62	inch	2.729	2.500	2.182	0.319	2.142	2.272	0.494	0.421
		mm	69.32	63.50	55.42	8.10	54.40	57.71	12.55	10.70
4 ROWS	78	inch	2.644	2.406	2.081	0.439	2.035	2.169	0.605	0.527
		mm	67.16	61.11	52.86	11.15	51.70	55.10	15.37	13.40

SPECIFICATIONS:

ELECTRICAL:

INSULATION RESISTANCE:	1,000 MOhms MIN.
OPERATING TEMPERATURE:	-50°C TO +100°C
VOLTAGE:	500 VAC FOR 1 MINUTE

MATERIALS:

INSULATOR:	PBT +30% GF, UL94 V-0
PROCESS TEMP:	230°C
SHELL:	NICKEL PLATED STEEL

COMPATIBLE WITH NORCOMP CONTACT PART NUMBERS BELOW:

180-001-170L001
180-101-170L001
180-201-170L002

****NOTE: CONTACTS MUST BE PURCHASED SEPARATELY****

NORCOMP MACHINED CONTACT PART NUMBERS 180-201-170L002 & 180-202-170L002, ONCE INSERTED INTO NORCOMP 180 SERIES CRIMP AND POKE CONNECTORS, CANNOT BE REMOVED.

180-YYY-17YLYY0

- SERIES
- POSITIONS
  - 015
  - 026
  - 044
  - 062
  - 078
- GENDER
  - 1 = MALE
- TERMINATION
  - 7 = CRIMP & POKE
- SHELL PLATING
  - 2 = TIN (DISCONTINUED)
  - 3 = NICKEL (GROUND INDENTS)
- HARDWARE OPTIONS
  - 00 = NO HARDWARE
  - 01 = .157" CLINCH NUT (SOLDER SIDE)
  - 02 = .250" CLINCH NUT (SOLDER SIDE)
  - 03 = .250" CLINCH NUT (MATING SIDE)
- PLATING OPTIONS
  - 0 = NO CONTACTS

RoHS COMPLIANT

UNITS = inch [mm]

DO NOT SCALE FROM DRAWING

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN: P. JENKINS

DATE: 07/19/2005

NorComp

SCALE: NTS

SHEET 1 OF 2

REV 26


DWG NO. 180-YYY-17YLYY0

DESCRIPTION: MALE // HD DSUB // CRIMP AND POKE


ALL CLINCH-NUTS ARE 4-40 INTERNAL THREADS

TOLERANCE:
ALL DIMENSIONS ARE ±0.010


01 ..... 0.157" (SOLDER SIDE)



02 ..... 0.250" (SOLDER SIDE)



03 ..... 0.250" (MATING SIDE)



RoHS COMPLIANT

UNITS = inch [mm]

DO NOT SCALE FROM DRAWING

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN: P. JENKINS

DATE: 07/19/2005

NorComp

SCALE: NTS

SHEET 2 OF 2

REV 26

DWG NO. 180-YYY-17YLYY0