ZD SERIES

004988
Issue 8

MICRO SWITCH Sealed Subminiature Basic Switches



DESCRIPTION

Honeywell MICRO SWITCH ZD Series is a sealed subminiature snap-action switch. Although small in size, the ZD Series is rated for controlling electrical loads ranging from logic-level (low current, low voltage) to limited power-duty switching (up to 3 A/125 Vac).

The switch when provided with integral wire leads is sealed to IP67 and is suitable for applications where the switch assembly would be exposed to liquids or particulate contaminates in the environment.

A wide variety of stainless steel levers are available, and when combined with the subminiature package size, can adapt the switch for many different applications. The ZD Series is certified to UL, cUL, CE, UKCA, ENEC and CQC for worldwide use.

VALUE TO CUSTOMERS

- Well suited for power-duty and logic-level loads
- Performs in wet, dirty, and dusty environments
- Enhances safety through enablement of monitoring and guidance capabilities that improve productivity of operators

FEATURES

- Subminiature package size
- SPDT, SPNC, or SPNO switch options
- Power-duty switching with silver contacts or logic-level (low voltage and milliamperes) with gold-plated contacts
- Pre-leaded wires sealed to IP67
- Built with an integral sealed pin plunger
- Various styles of levers and variety of terminations
- Integral mounting pins (pillars) on the switch housing simplify and reduce installation time

APPLICATIONS

- Electric window control for automobiles
- Automobile seat belt latch detection
- Engine hood or trunk latch detection
- Vehicle door latch detection
- Vehicle mounted wheelchair lifts

DIFFERENTIATION

- The IP67-rated ealed switch is designed to operate in a variety of demanding applications, reducing the challenge of harsh environments
- Current carrying capacity, up to 3 A, allows for a solution in many applications where space is a premium
- Switch package designed to accommodate demanding temperature requirements, up to 85°C [185°F]

PORTFOLIO

The ZD Series of subminiature basic switches are a part of a strong offering of submins including ZM/ZM ZX, and ZW Series switches.

Honeywell

MICRO SWITCH SEALED SUBMINIATURE BASIC SWITCHES
ZD SERIES

TABLE 1. SPECIFICATIONS

Characteristic	ZD20S Series (Logic Level)	ZD30S Series (Power Duty)
Circuitry	SPDT, SPNC, SPNO *(Note: SPNC and SPNO prewired only)*	SPDT, SPNC, SPNO *(Note: SPNC and SPNO prewired only)*
Operating force	130 g max. @ plunger	130 g max. @ plunger
Termination	PCB, solder, prewired	PCB, solder, prewired
Sealing	IP67 (prewired), IP00 for exposed terminals	IP67 (prewired), IP00 for exposed terminals
Actuators (levers 300 series stainless steel)	pin plunger, flat lever, formed lever, long formed leaf lever, simulated roller lever, special lever	pin plunger, flat lever, formed lever, long formed leaf lever, simulated roller lever, special lever
Agency certification	UL, cUL, CE, UKCA, ENEC, CQC, RoHS compliant	UL, cUL, CE, UKCA, ENEC, CQC, RoHS compliant
Operating temperature (manufacturer rated)	-40°C to 85°C [-40°F to 185°F]	-40 C to 85°C [-40°F to 185°F]
Mechanical endurance (cycles)	500,000 min. @ 120 cycles per min. max.	500,000 min. @ 120 cycles per min. max.
Electrical endurance (cycles)	Up to 500,000 @ 30 cycles/minute max.	Up to 100,000 @ 30 cycles/minute max.
Switch resistance (initial)	100 mΩ max.	100 mΩ max.
Insulation resistance (initial)	100 MΩ min. (500 Vdc for one minute)	100 MΩ min. (500 Vdc for one minute)
Dielectric strength (initial) (between live parts and ground)	500 VRMS for one minute ≤ 0.5 mA leakage current	500 VRMS for one minute ≤ 0.5 mA leakage current
Plunger seal	silicone	silicone
Contact material	gold-plated silver	silver
Housing material	case, polyamide (nylon); cover, PBT polyester	case, polyamide (nylon); cover, PBT polyester

Note: Refer to engineering drawing for additional information.

TABLE 2. ELECTRICAL RATINGS

Switch option	CQC (Asia-Pacific) Per GB 15092-1	CE, UKCA, ENEC (Europe) Per IEC 61058-1	UL, cUL (Americas) UL 61058-1, File 12252
ZD20S Series (Gold-plated contacts)	0.01 A, 12 Vdc, 500,000 cycles	0.01 A to 0.1 A, 12 Vdc 100,000 cycles	0.01 RA to 0.1 RA, 12 Vdc 10,000 cycles
ZD30S Series (Silver contacts)	3 A, 12 Vdc, 100,000 cycles 3 A, 125 Vac, 10,000 cycle	3 A, 12 Vdc, 100,000 cycles 3 A, 125 Vac, 10,000 cycles	3 RA, 12 Vdc, 100,000 cycles 3 RA 125 Vac, 10,000 cycles

Note: UL, cUL, CE, UKCA, CQC and ENEC “use temperature”; 0°C to 55°C [32°F to 131°F].

MICRO SWITCH SEALED SUBMINIATURE BASIC SWITCHES
ZD SERIES

Figure 1. Product Nomenclature and Order Guide

ZD	20	S	10	A	0	3	0	0	–	
Switch Type	Current Rating	Operating Force[3] (at pin plunger)	Terminal Type	Actuator Type	Circuitry	Pillar	Wire Size	Wire Type[6]		Special Designator
ZD Series Subminiature Basic Switch	**20** 10 mA, 12 Vdc **30** 3 A 12 Vdc 3 A 125 Vac	**S** 130 g max.	Wired (blank)[4] **10** Solder (2,5 mm x 1,70 mm) **20** PCB, straight (0,6 mm x 2,5 mm) **50** PCB, right angle **60** PCB, left angle **70** Long solder[7] **99** SPECIAL[2]	**A** Pin plunger **B** Special formed lever, 13,7 mm **C** Straight lever, 15 mm **H** Sim. roller lever, 18,6 mm **J** Long straight lever, 23 mm **K** Sim. roller lever, 14,4 mm **M** Special formed lever, 15 mm **N** Sim. roller lever, 17 mm **P** Long formed leaf lever, 19 mm **S** SPECIAL[2]	**0** SPDT **3** SPNO[5] **4** SPNC[5]	**4** No pillar **5** Left pillar **6** Right pillar **7** No pillar, w/ mounting hole tab **9** Short pillar & mounting hole **12** Left & right pillar **99** SPECIAL[2]	Terminal option (blank) **E** 20 AWG (standard) **F** 22 AWG **G** 24 AWG **H** 26 AWG **M** 0,3 mm[2] (Note 9) diameter **N** 0,5 mm[2] (Note 9) diameter	Terminal option (blank) **A** UL1007 (standard) **C** UL1430 **D** UL1061 **F** AVSS[8] (automotive)		A special designator is used to indicate non-standard feature, such as a special actuator, wire color, wire length, connector, etc. This code will consist of three alphanumeric characters. **R:** indicates wire exit opposite plunger **L:** indicates wire exit plunger end

NOTES:
[1] Not all combinations of model code are available. Please contact your Honeywell provider/representative for assistance.
[2] Terminal Type "99", Actuator Type "S", and/or Pillar/Travel Type "99" designates a special and requires a special designation at the end of the listing.
[3] Operate force is measured at the plunger. Adding an actuator/lever will change the operate force. See page 6 for operate force.
[4] Standard wire exit is out the bottom of the switch. No special designator is necessary for this wire exit direction.
[5] SPNO and SPNC are only available if termination type is wired.
[6] Standard wire length is 500 mm [19.5 in] long. Other lengths available upon request.
[7] Long solder terminals do not have UL, CE, UKCA or ENEC approvals.
[8] Switches with AVSS wire do not have UL approvals.
[9] Wire sizes "M" and "N" only applicable to AVSS wire type.

MICRO SWITCH SEALED SUBMINIATURE BASIC SWITCHES
ZD SERIES

O.F. • Operating force
R.F. • Release force
P.T. • Pretravel
O.T. • Overtravel
D.T. • Differential travel
O.P. • Operating position

PRODUCT SPECIFICATIONS AND LISTINGS

Contact your Honeywell rep or distributor for additional listings

	Catalog Listing	Actuator	Circuitry/ Contact Material	Elect. Rating Spec. (page 4)	Termination	Operate Force max. N [Gm]	Release Force min. N [Gm]	Free Position max. mm [in] No hole or pillar, from top of switch (see page 8)	
	**ZD20S20A04**	Pin plunger	SPDT/ Gold Plated	0.1 A	PCB	1,27 [130]	0,34 [35]	–	
	ZD20S20A05	Pin plunger	SPDT/ Gold Plated	0.1 A	PCB	1,27 [130]	0,34 [35]	–	
	ZD20S20A06	Pin plunger	SPDT/ Gold Plated	0.1 A	PCB	1,27 [130]	0,34 [35]	–	
	ZD20S20A04	Pin plunger	SPDT/ Gold Plated	0.1 A	PCB	1,27 [130]	0,34 [35]	–	
	ZD20S20A05	Pin plunger	SPDT/ Gold Plated	0.1 A	PCB	1,27 [130]	0,34 [35]	–	
	ZD20S20A06	Pin plunger	SPDT/ Gold Plated	0.1 A	PCB	1,27 [130]	0,34 [35]	–	
	ZD30S20A04	Pin plunger	SPDT/ Silver	3 A	PCB	1,27 [130]	0,34 [35]	–	
	ZD30S20A06	Pin plunger	SPDT/ Silver	3 A	PCB	1,27 [130]	0,34 [35]	–	
	ZD30S20A06	Pin plunger	SPDT/ Silver	3 A	PCB	1,27 [130]	0,34 [35]	–	
	ZD30S20A04	Pin plunger	SPDT/ Silver	3 A	PCB	1,27 [130]	0,34 [35]	–	
	ZD30S20A05	Pin plunger	SPDT/ Silver	3 A	PCB	1,27 [130]	0,34 [35]	–	
	ZD30S20A06	Pin plunger	SPDT/ Silver	3 A	PCB	1,27 [130]	0,34 [35]	–	
	**ZD30S60N05**	Simulated roller leaf lever	SPDT/ Silver	3 A	PCB (left side)	1,96 [200]	0,49 [50]	–	
	**ZD30S60C05**	Straight leaf lever	SPDT/ Silver	3 A	PCB (left side)	1,91 [195]	0,54 [55]	–	

MICRO SWITCH SEALED SUBMINIATURE BASIC SWITCHES
ZD SERIES


O.F. • Operating force
R.F. • Release force
P.T. • Pretravel
O.T. • Overtravel
D.T. • Differential travel
O.P. • Operating position

Free Position max. mm [in] from mounting hole or pillar (see page 8)	Free Position max. mm [in] from base for PCB terminal (see page 8)	Operate point mm [in] No hole or pillar, from top of switch (see page 8)	Operate point mm [in] from mounting hole or pillar (see page 8)	Operate point mm [in] from base for PCB terminals (see page 8)	P.T. max. mm [in]	O.T. min. mm [in]	D.T. max. mm [in]
–	11,15 [0.44]	–	–	10,55 ±0,2 [0.42 ±0.008]	0,80 [0.03]	0,80 [0.03]	0,3 [0.01]
7,35 [0.29]	11,15 [0.44]	–	6,75 ±0,2 [0.27 ±0.008]	10,55 ±0,2 [0.42 ±0.008]	0,80 [0.03]	0,80 [0.03]	0,3 [0.01]
7,35 [0.29]	11,15 [0.44]	–	6,75 ±0,2 [0.27 ±0.008]	10,55 ±0,2 [0.42 ±0.008]	0,80 [0.03]	0,80 [0.03]	0,3 [0.01]
–	11,15 [0.44]	–	–	10,55 ±0,2 [0.42 ±0.008]	0,80 [0.03]	0,80 [0.03]	0,3 [0.01]
7,35 [0.29]	11,15 [0.44]	–	6,75 ±0,2 [0.27 ±0.008]	10,55 ±0,2 [0.42 ±0.008]	0,80 [0.03]	0,80 [0.03]	0,3 [0.01]
7,35 [0.29]	11,15 [0.44]	–	6,75 ±0,2 [0.27 ±0.008]	10,55 ±0,2 [0.42 ±0.008]	0,80 [0.03]	0,80 [0.03]	0,3 [0.01]
–	11,15 [0.44]	–	–	10,55 ±0,2 [0.42 ±0.008]	0,80 [0.03]	0,80 [0.03]	0,3 [0.01]
7,35 [0.29]	11,15 [0.44]	–	6,75 ±0,2 [0.27 ±0.008]	10,55 ±0,2 [0.42 ±0.008]	0,80 [0.03]	0,80 [0.03]	0,3 [0.01]
7,35 [0.29]	11,15 [0.44]	–	6,75 ±0,2 [0.27 ±0.008]	10,55 ±0,2 [0.42 ±0.008]	0,80 [0.03]	0,80 [0.03]	0,3 [0.01]
–	11,15 [0.44]	–	–	10,55 ±0,2 [0.42 ±0.008]	0,80 [0.03]	0,80 [0.03]	0,3 [0.01]
7,35 [0.29]	11,15 [0.44]	–	6,75 ±0,2 [0.27 ±0.008]	10,55 ±0,2 [0.42 ±0.008]	0,80 [0.03]	0,80 [0.03]	0,3 [0.01]
7,35 [0.29]	11,15 [0.44]	–	6,75 ±0,2 [0.27 ±0.008]	10,55 ±0,2 [0.42 ±0.008]	0,80 [0.03]	0,80 [0.03]	0,3 [0.01]
14,40 [0.57]	18,20 [0.72]	–	17,70 ±0,70 [0.70 ±0.03]	21,50 ±0,70 [0.85 ±0.03]	4,40 [0.17]	1,45 [0.06]	0,5 [0.02]
10,70 [0.42]	14,50 [0.57]	–	7,40 ±0,2 [0.29 ±0.01]	11,20 ±0,2 [0.44 ±0.01}	3,85 [0.15]	1,35 [0.05]	0,5 [0.02]

MICRO SWITCH SEALED SUBMINIATURE BASIC SWITCHES
ZD SERIES

DIMENSIONS

Figure 2. ZD Dimensions

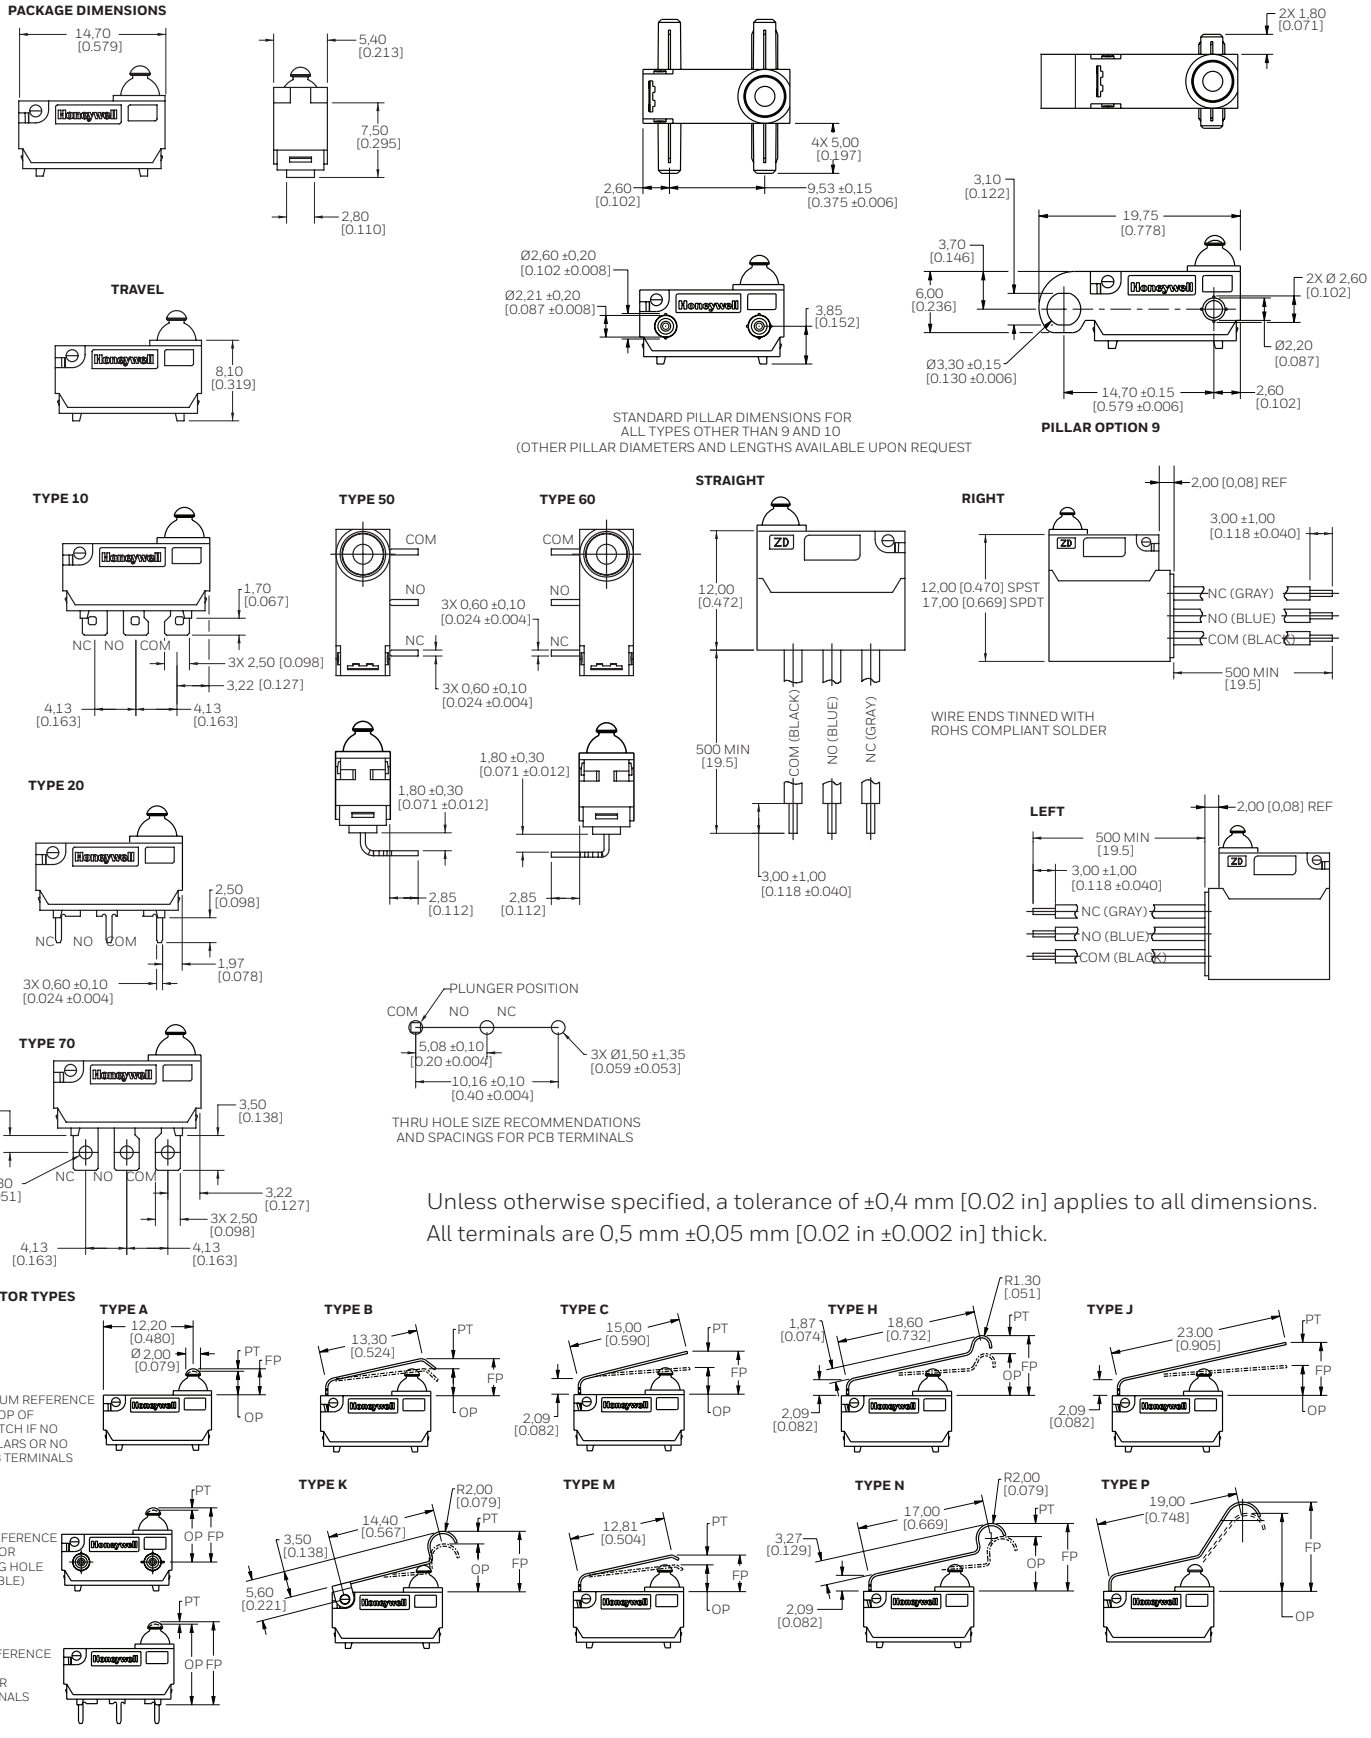

Unless otherwise specified, a tolerance of ±0,4 mm [0.02 in] applies to all dimensions. All terminals are 0,5 mm ±0,05 mm [0.02 in ±0.002 in] thick.

MICRO SWITCH SEALED SUBMINIATURE BASIC SWITCHES
ZD SERIES

TABLE 3. OPERATING CHARACTERISTICS

Catalog Listing	Operate Force max. (g)	Release Force min. (g)	Free Position max. (mm) (no hole or piol-lar)	Free Position max. (mm) (from hole or pillar)	Free Position max. (mm) (from base)	Operate Point (mm) (no hole or piollar)	Operate Point (mm) (from hole or pillar)	Operate Point (mm) (from base)	Pretravel max. (mm)	Overtravel min. (mm)	Differential Travel max. (mm)
ZD - - S - - A *	130	35	3,65	7,35	11,15	3,05 ±0,2	6,75 ±0,2	10,55 ±0,2	0,80	0,80	0,3
ZD - - S - - B *	225	60	5,60	9,30	13,10	3,50 ±0,6	7,20 ±0,6	11,0 ±0,6	2,50	0,80	0,4
ZD - - S - - C *	195	55	7,00	10,70	14,50	3,70 ±0,2	7,40 ±0,2	11,20 ±0,2	3,85	1,35	0,5
ZD - - S - - H *	160	45	10,10	13,80	17,60	6,20 ±0,8	9,90 ±0,8	13,7 ±0,2	4,80	1,65	0,7
ZD - - S - - J *	150	35	7,80	11,50	15,30	4,50 ±0,7	8,20 ±0,7	12,0 ±0,7	4,00	2,00	1,0
ZD - - S - - K *	110	9	8,80	12,50	16,30	7,50 ±0,5	11,20 ±0,5	15,0 ±0,5	1,45	1,25	0,4
ZD - - S - - M *	235	65	7,20	9,20	13,00	3,40 ±0,45	7,10 ±0,45	10,9 ±0,45	3,00	0,80	0,4
ZD - - S - - N *	200	50	10,70	14,40	18,20	14,00 ±0,70	17,7 ±0,70	21,50 ±0,70	4,40	1,45	0,5
ZD - - S - - P *	180	35	15,30	19,00	22,80	11,70 ±1,50	15,4 ±1,5	19,20 ±1,5	5,10	0,90	0,7

WARRANTY/REMEDY

Honeywell warrants goods of its manufacture as being free of defective materials and faulty workmanship during the applicable warranty period. Honeywell's standard product warranty applies unless agreed to otherwise by Honeywell in writing; please refer to your order acknowledgment or consult your local sales office for specific warranty details. If warranted goods are returned to Honeywell during the period of coverage, Honeywell will repair or replace, at its option, without charge those items that Honeywell, in its sole discretion, finds defective. **The foregoing is buyer's sole remedy and is in lieu of all other warranties, expressed or implied, including those of merchantability and fitness for a particular purpose. In no event shall Honeywell be liable for consequential, special, or indirect damages.**

While Honeywell may provide information or engineering support for its products through Honeywell personnel, literature and website, it is the buyer's sole responsibility to determine the suitability of the Honeywell product(s) for the buyer's requirements

Specifications may change without notice. The information we supply is believed to be accurate and reliable as of this writing. However, Honeywell assumes no responsibility for its use.

⚠ WARNING
IMPROPER INSTALLATION

- Consult with local safety agencies and their requirements when designing a machine-control link, interface and all control elements that affect safety.
- Strictly adhere to all installation instructions.

Failure to comply with these instructions could result in death or serious injury.

⚠ WARNING
MISUSE OF DOCUMENTATION

- The information presented in this product sheet is for reference only. Do not use this document as a product installation guide.
- Complete installation, operation, and maintenance information is provided in the instructions supplied with each product.

Failure to comply with these instructions could result in death or serious injury.

For more information

Honeywell Sensing Solutions services its customers through a worldwide network of sales offices and distributors. For application assistance, current specifications, pricing, or the nearest Authorized Distributor, visit automation.honeywell.com/hss or call:

USA/Canada	+302 613 4491
Latin America	+1 305 805 8188
Europe	+44 1344 238258
Japan	+81 (0) 3-6730-7152
Singapore	+65 6355 2828
Greater China	+86 4006396841

Honeywell Sensing Solutions
830 East Arapaho Road
Richardson, TX 75081
www.honeywell.com

004988-8-EN | 8 | 02/25
© 2025 Honeywell International Inc. All rights reserved.

Honeywell