


DESCRIPTION: 25 POS - FEMALE - SLIM - RIGHT ANGLE

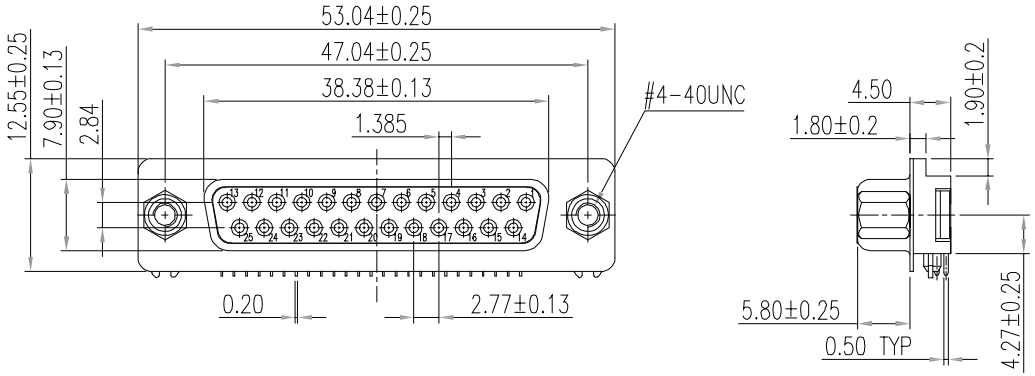

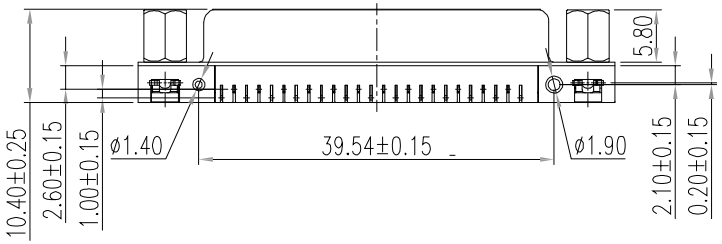

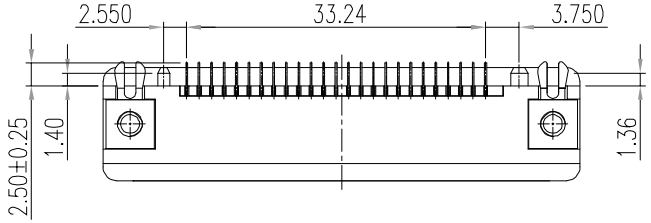

MATERIAL/FINISH:

SHELL:	SPCC, NICKEL PLATED
BRACKET:	BRASS, NICKEL PLATED
INSULATOR:	PBT OR PA9T, UL 94V-0, BLACK,
PROCESS TEMP:	230°C for 3 seconds (PBT), 2 CYCLES
	260°C for 5 seconds (PA9T), 2 CYCLES
CONTACT:	BRASS, TIN PLATED
	GOLD PLATED - MATING AREA
	BRIGHT TIN - TERMINATING AREA
BOARDLOCK:	COPPER ALLOY, TIN PLATED
RIVET:	COPPER ALLOY, NICKEL PLATED

ELECTRICAL:

RATED CURRENT:	3 AMPS
RATED VOLTAGE:	250 VAC (rms) MAX.
WITHSTANDING VOLTAGE:	500 VAC (rms) FOR 1 Min.
INSULATION RESISTANCE:	1,000 MOhms MIN.
CONTACT RESISTANCE:	25 mOhms Max.
OPERATING TEMPERATURE:	-55° ~ +85° C
TOTAL MATING FORCE:	9.4 Kgf MAX.
TOTAL UNMATING FORCE:	1.4 Kgf MIN.

190-025-2 1 3L YY Y

- SERIES
- No. of POSITIONS
- GENDER
  - 2 = FEMALE
- TERMINATION
  - 1 = PC MOUNT
- SHELL PLATING
  - 3 = NICKEL
- INSULATOR MATERIAL
  - L = PBT
  - R = PA9T
- HARDWARE OPTIONS
  - SEE PAGE 2
- PLATING OPTIONS
  - 7 = GOLD FLASH (MATING AREA) BRIGHT TIN (SOLDER TAILS)
  - 9 = 30u" GOLD (MATING AREA) BRIGHT TIN (SOLDER TAILS)

RoHS COMPLIANT

UNITS = mm

DO NOT SCALE FROM DRAWING

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN: M. SIGMON

DATE: 10/25/2016

NorComp

SCALE: NTS


SHEET 1 OF 2

REV 5


DWG NO. 190-025-213LYYY

DESCRIPTION: 25 POS - FEMALE - SLIM - RIGHT ANGLE


HARDWARE OPTIONS

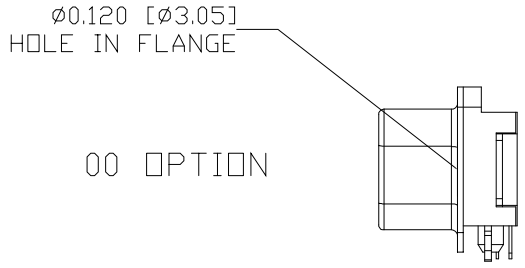


00 OPTION

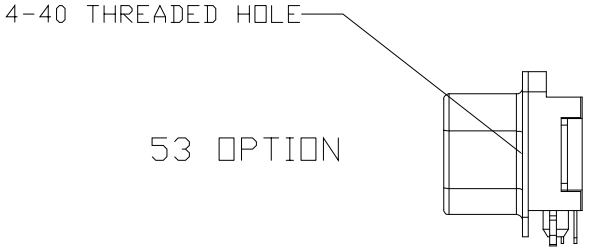

53 OPTION

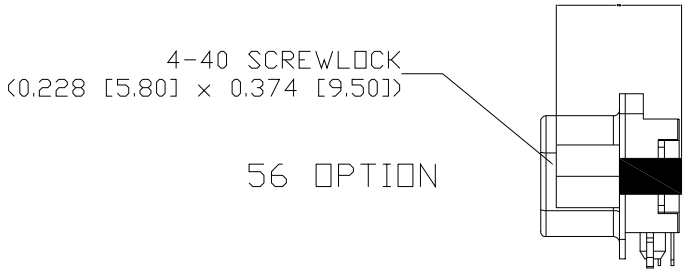

56 OPTION

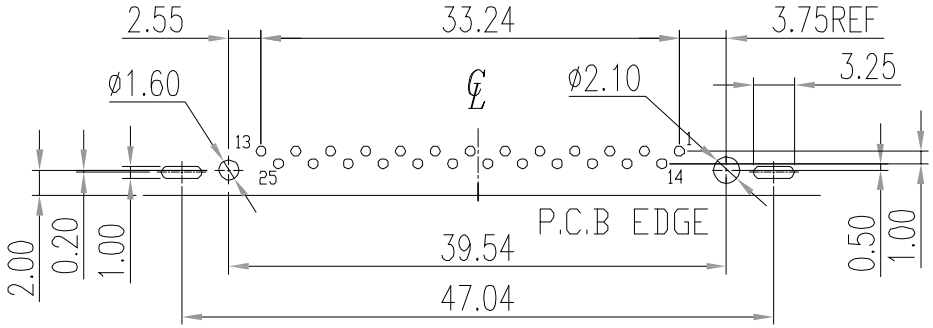

RoHS COMPLIANT

UNITS = mm

DO NOT SCALE FROM DRAWING

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN:	DATE:
M. SIGMON	10/25/2016

NorComp

SCALE:	SHEET	OF	REV
NTS	2	2	5

DWG NO. 190-025-213LYYY