
SPECIFICATIONS

Model Number: CLE2L2 Version: 02
Part Number: 19020188A Aug 07, 2018

Mechanical Drawing:

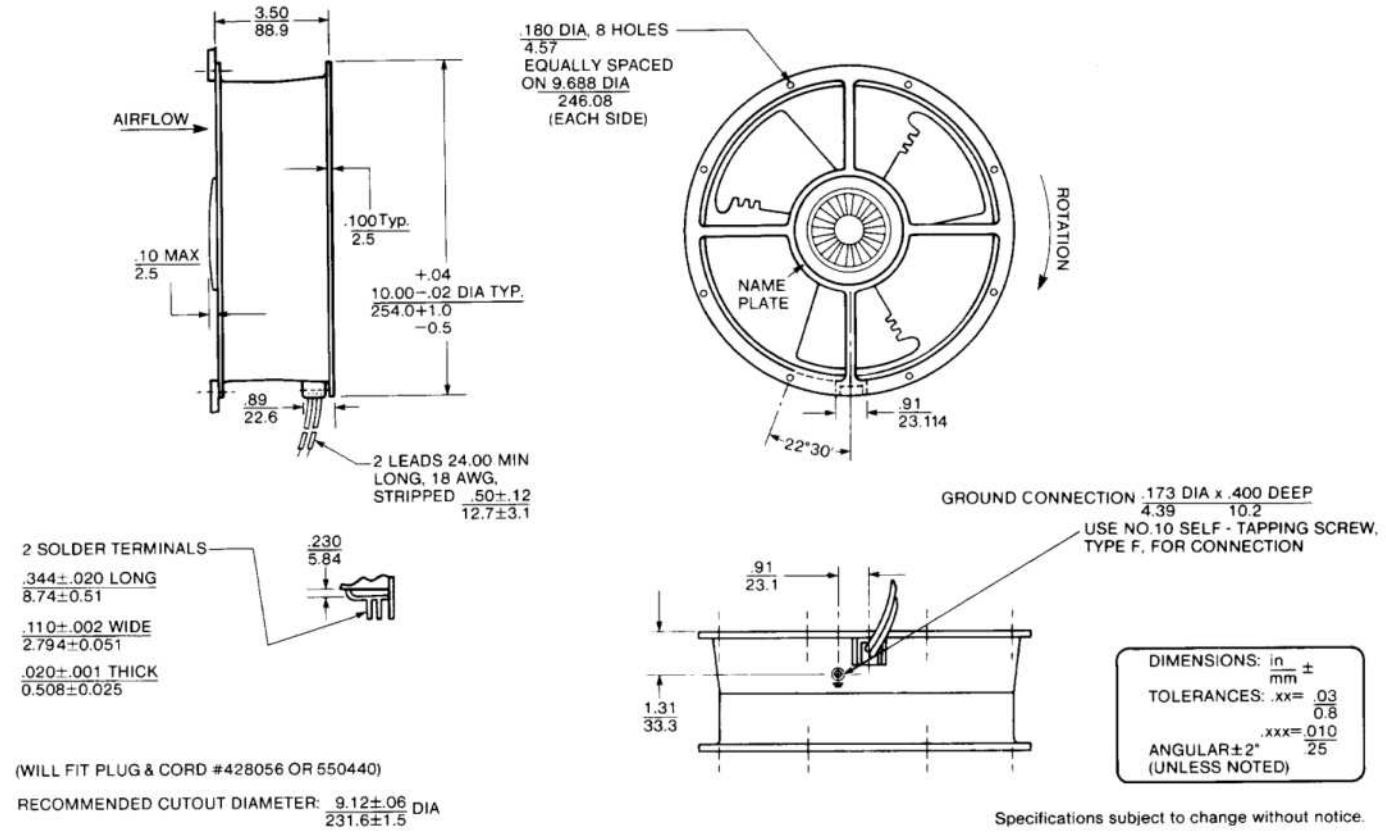

Motor:

Nominal Voltage	= 115 VAC
Frequency	= 50 / 60 Hz
Nominal Running Current	= 0.48 / 0.50 Amps
Max. Locked Rotor Current	= 0.70 amps
Running Power	= 67/61 Watts
Average Speed	= 1400 / 1650 RPM
Bearings	= Ball
Air Flow	= 455 / 550 CFM
Acoustic:	= 45.2 / 49.2 dBA

Construction:
Venturi: Aluminum, Black.
Propeller: Plastic, Black, UL 94V-0

Life Expectancy:
This fan is designed for continuous duty life of46,000 hours at 70°C.


Additional Features:
Permanent Split Capacitor Motor
Automatic Reset Thermal Protector
Feathered Edge Propeller

Operating Temperature:	-10°C to 70°C
Storage Temperature:	-40°C to 85°C

Termination:
24” Lead wires, 18 AWG, UL 1015

Agency Approvals:
UL, CUL, CE

PQ Curve:

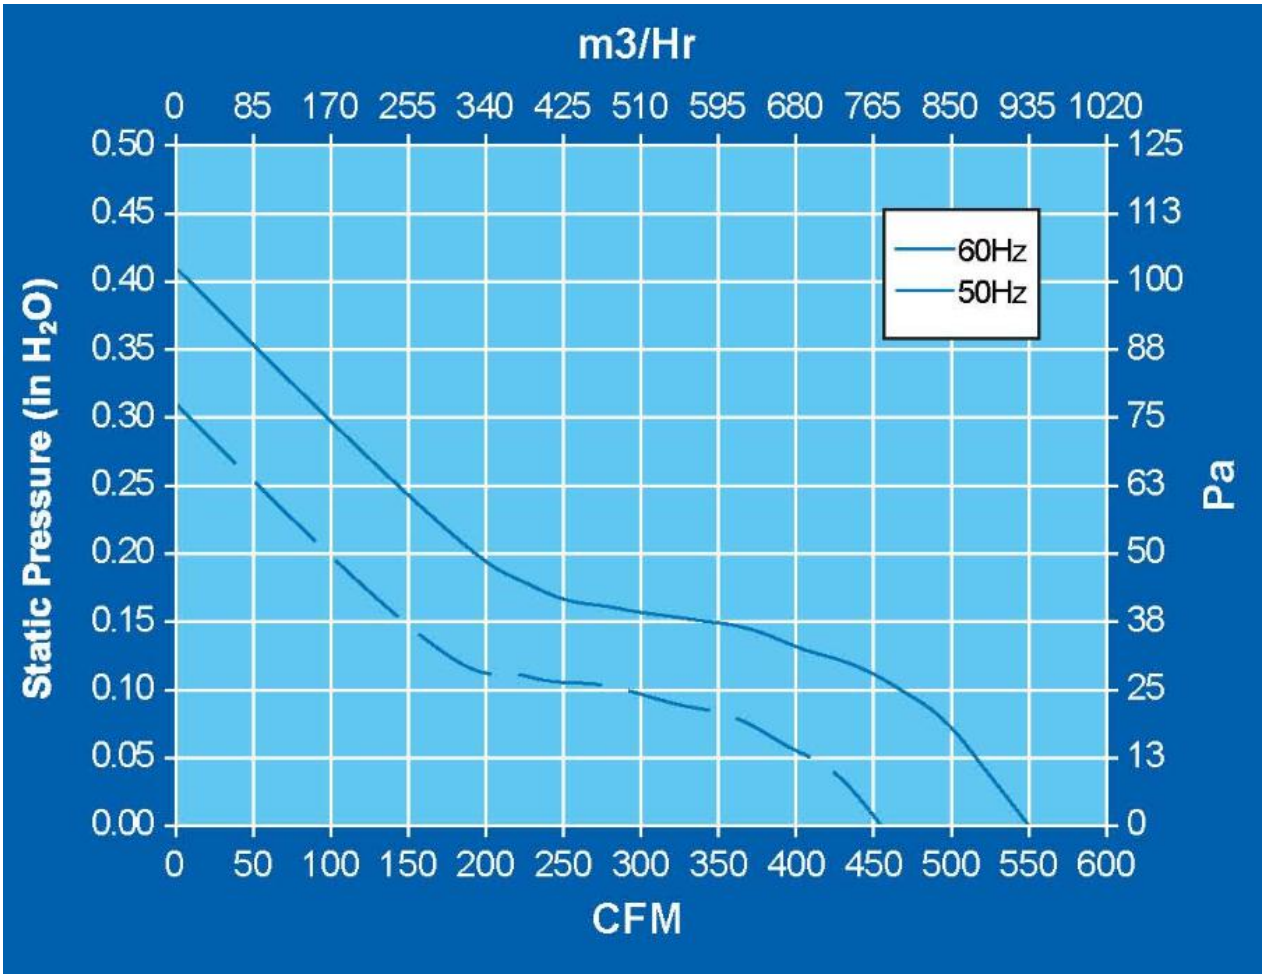
m3/Hr
0 85 170 255 340 425 510 595 680 765 850 935 1020
0.50 0.45 0.40 0.35 0.30 0.25 0.20 0.15 0.10 0.05 0.00
Static Pressure (in H2O)
125 113 100 88 75 63 50 38 25 13 0
Pa
60Hz
50Hz
0 50 100 150 200 250 300 350 400 450 500 550 600
CFM