


Dimensions (mm)

Size	A	B	C
09	30.81	24.99	16.33
15	39.20	33.30	24.70
25	53.05	47.04	38.40
37	69.40	63.50	54.80



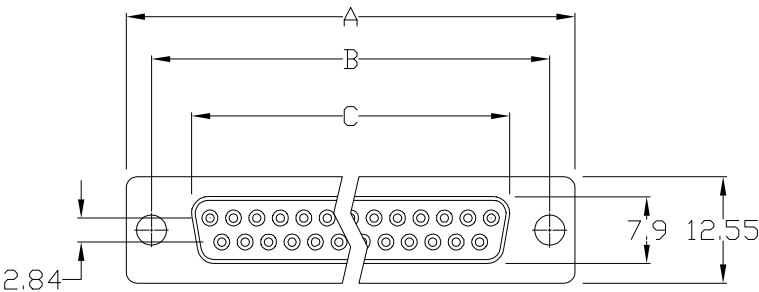


Material:


Insulator: Nylon 6T, UL94V-0, 260°C Process Temp, Black
Contact: Phosphor Bronze
Shell: Nickel Plated Steel

Electrical:

Current Rating: 5 AMPS
Contact Resistance: 20 mOhms Max.
Insulation Resistance: 1000 MOhms Min.
Working Voltage: 250V
Operating Temperature: -55° C TO +125° C

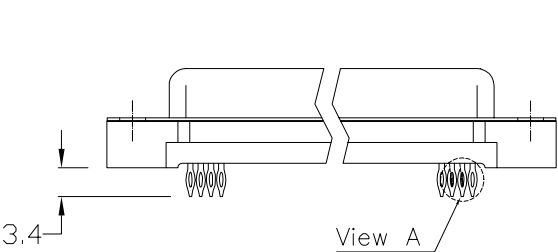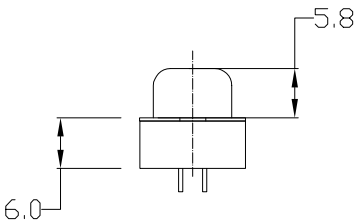

View A

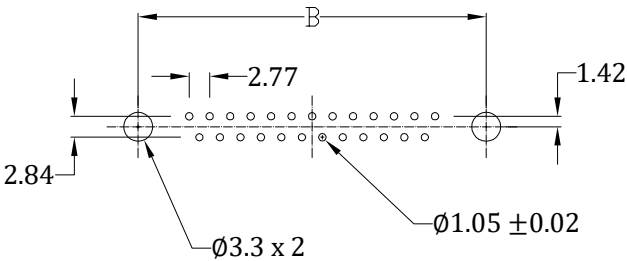

Recommended PCB Layout

1 9 1 - Y Y Y - 2 2 3 R Y Y Y

Series
Position
009
015
025
037
Gender
2 = Female
Termination
2 = Press Fit
Shell Plating
3 = Nickel
Hardware Options
00 = No Hardware
55 = 4-40 Insert
56 = 4-40 Insert with Board Locks
57 = 4-40 Standoff with Board Locks
59 = 4-40 Standoff
Plating Options
1 = Gold Flash mating area, Tin plated tails
2 = 30µ" Gold mating area, Tin plated tails

RoHS COMPLIANT

UNITS = mm


DO NOT SCALE FROM DRAWING

	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	DRAWN: Pam Jenkins
	DATE: 9/15/2003	


Tolerance
X. ±0.38
.X ±0.25
.XX ±0.13

NorComp	SCALE: NTS	SHEET 1 OF 2	REV 7
	DWG NO.	191-YYY-223RYYY	


00 = $\varnothing$ 3.05 THRU HOLE




55 = 4-40 INSERT

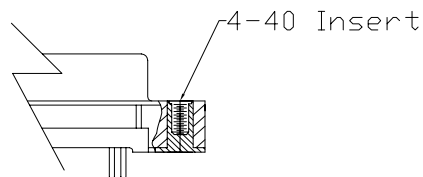


56 = 4-40 INSERT WITH BOARD LOCK

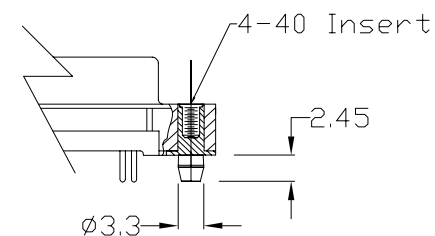

57 = 4-40 STANDOFF WITH BOARD LOCKS

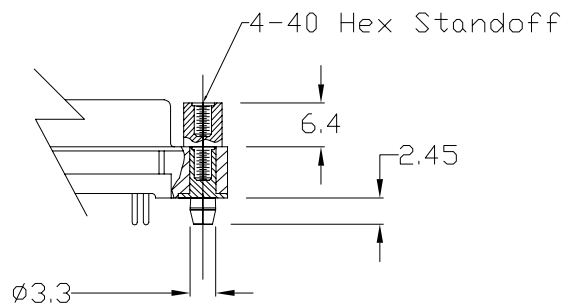

59 = 4-40 STANDOFF

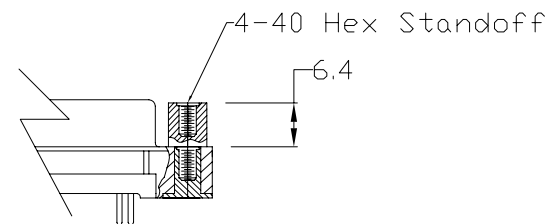

RoHS COMPLIANT



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN:
Pam Jenkins

DATE:
9/15/2003

Tolerance
X. $\pm$ 0.38
.X $\pm$ 0.25
.XX $\pm$ 0.13

UNITS = mm

NorComp

DO NOT SCALE FROM DRAWING

SCALE:
NTS

SHEET OF
2 2

REV
7

DWG NO.

191-YYY-223RYYY