
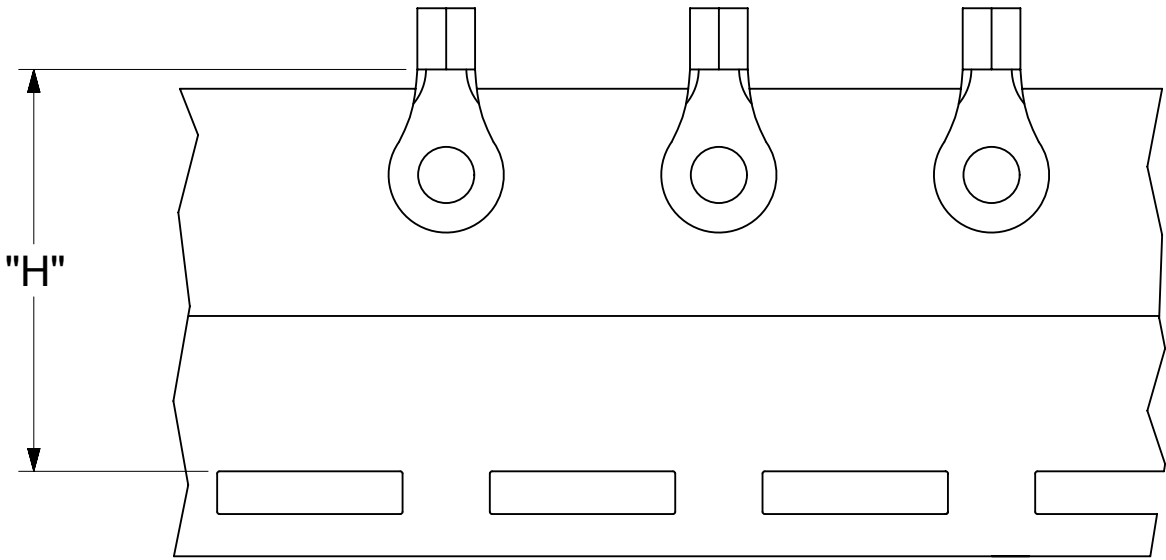


| 12                 |                       | 11                 |                       | 10             |                     | 9                          |              | 8             |               | 7             |  | 6 |  | 5 |  | 4 |  | 3 |  | 2 |  | 1 |  |
|--------------------|-----------------------|--------------------|-----------------------|----------------|---------------------|----------------------------|--------------|---------------|---------------|---------------|--|---|--|---|--|---|--|---|--|---|--|---|--|
| LOOSE PIECE        |                       | TAPE MOUNTED       |                       | SPECIFICATIONS |                     |                            |              |               |               |               |  |   |  |   |  |   |  |   |  |   |  |   |  |
| MATERIAL<br>NUMBER | ENGINEERING<br>NUMBER | MATERIAL<br>NUMBER | ENGINEERING<br>NUMBER | STUD<br>SIZE   | "S"<br>±.005 [0.13] | "W"                        | "C"<br>MIN.  | "E"<br>MAX.   | "L "<br>MAX.  | "H"           |  |   |  |   |  |   |  |   |  |   |  |   |  |
| 191930254          | F-366-10              | ---                | ---                   | 10             | .198 [5.03]         | .665±.013<br>[16.89±0.33]  | .520 [13.21] | 1.028 [26.11] | 1.385 [35.18] | 1.172 [29.77] |  |   |  |   |  |   |  |   |  |   |  |   |  |
| 191930258          | F-366-12              | ---                | ---                   | 12             | .515 [13.08]        |                            |              |               |               |               |  |   |  |   |  |   |  |   |  |   |  |   |  |
| 191930261          | F-366-14              | 191930263          | F-366-14T             | 14             | .265 [6.73]         |                            |              |               |               |               |  |   |  |   |  |   |  |   |  |   |  |   |  |
| 191930264          | F-366-38              | 191930266          | F-366-38T             | 38             | .390 [9.91]         |                            |              |               |               |               |  |   |  |   |  |   |  |   |  |   |  |   |  |
| 191930267          | F-366-56              | 191930269          | F-366-56T             | 56             | .328 [8.33]         |                            |              |               |               |               |  |   |  |   |  |   |  |   |  |   |  |   |  |
| 191930270          | F-366-76              | ---                | ---                   | 76             | .453 [11.51]        |                            |              |               |               |               |  |   |  |   |  |   |  |   |  |   |  |   |  |
| 191930273          | F-367-10              | 191930274          | F-367-10T             | 10             | .198 [5.03]         | .475±.010<br>[12.06±0.25]  | .520 [13.21] | 1.028 [26.11] | 1.288 [32.72] | 1.172 [29.77] |  |   |  |   |  |   |  |   |  |   |  |   |  |
| 191930275          | F-367-14              | 191930277          | F-367-14T             | 14             | .265 [6.73]         |                            |              |               |               |               |  |   |  |   |  |   |  |   |  |   |  |   |  |
| 191930278          | F-367-56              | ---                | ---                   | 56             | .328 [8.33]         |                            |              |               |               |               |  |   |  |   |  |   |  |   |  |   |  |   |  |
| 191930281          | F-369-12              | ---                | ---                   | 12             | .515 [13.08]        | .885±.010<br>[22.48±0.25]  | .989 [25.12] | 1.497 [38.02] | 1.970 [50.04] | ---           |  |   |  |   |  |   |  |   |  |   |  |   |  |
| 191930283          | F-369-38              | ---                | ---                   | 38             | .390 [9.91]         |                            |              |               |               |               |  |   |  |   |  |   |  |   |  |   |  |   |  |
| 191930285          | F-369-58              | ---                | ---                   | 58             | .656 [16.66]        |                            |              |               |               |               |  |   |  |   |  |   |  |   |  |   |  |   |  |
| 191930287          | F-370-12              | ---                | ---                   | 12             | .515 [13.08]        | 1.260±.010<br>[32.00±0.25] | .989 [25.12] | 1.497 [38.02] | 2.158 [54.81] | ---           |  |   |  |   |  |   |  |   |  |   |  |   |  |
| 191930289          | F-370-34              | ---                | ---                   | 34             | .781 [19.84]        |                            |              |               |               |               |  |   |  |   |  |   |  |   |  |   |  |   |  |
| 191930291          | F-370-38              | ---                | ---                   | 38             | .390 [9.91]         |                            |              |               |               |               |  |   |  |   |  |   |  |   |  |   |  |   |  |
| 191930293          | F-370-58              | ---                | ---                   | 58             | .656 [16.66]        |                            |              |               |               |               |  |   |  |   |  |   |  |   |  |   |  |   |  |

NOTES:

1. MATERIAL: COPPER
- PLATING: ELECTRO-TIN (.0003 MIN).
2. BRAZED SEAM
3. WIRE SIZE: 4 AWG
- 25 MM²
4. "UL" LISTING #E32244
- "CSA" LISTING #18689
5. ALL DIMENSIONS IN INCHES/[MM].
6. PARTS ARE ROHS COMPLIANT.
7. DIMS. SHOWN ARE FOR REFERENCE ONLY.

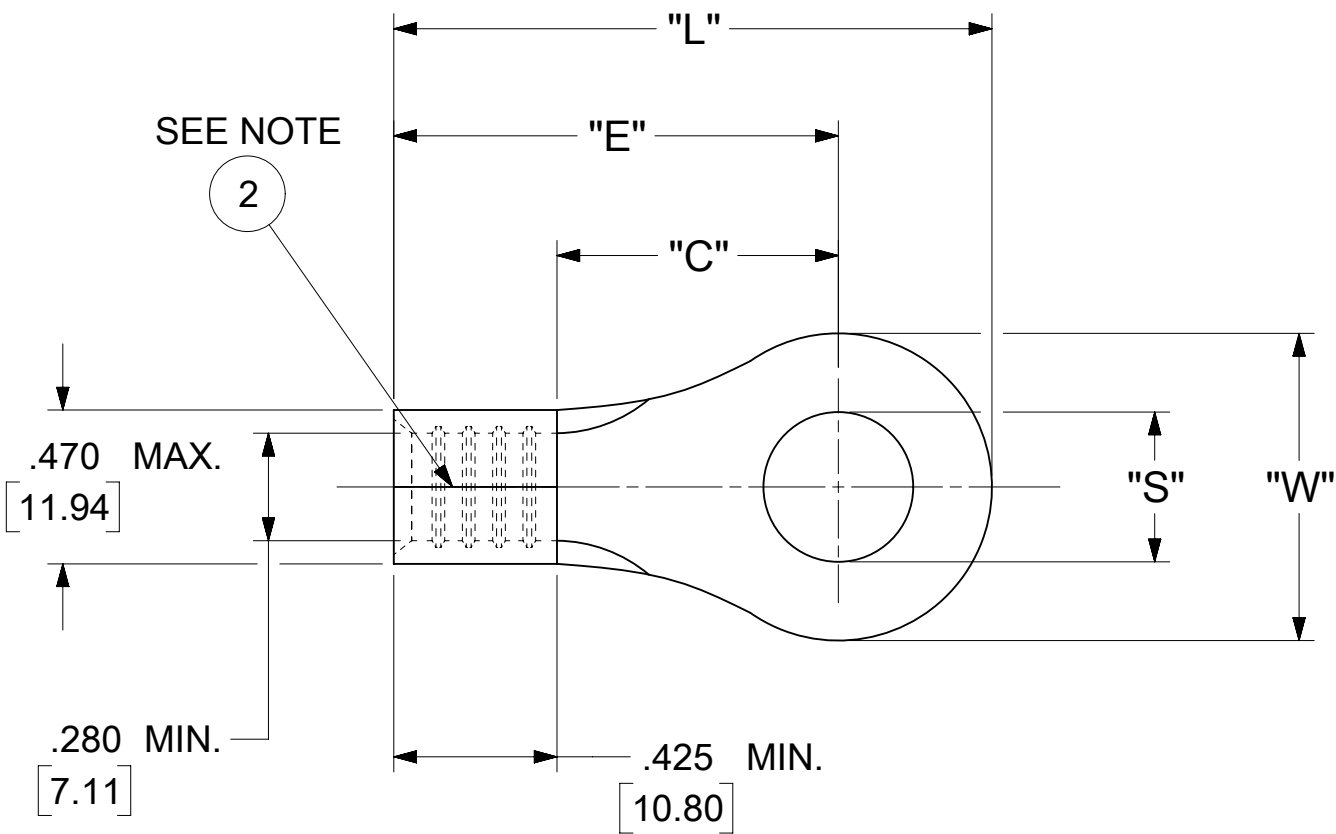

PARTS ON TAPE