


10	9	8	7	6	5	4	3	2	19203
MATERIAL NUMBER	ENGINEERING NUMBER	WIRE RANGE	"L" MAX	"A" MIN	"B" MAX	MATERIAL	MATERIAL THICKNESS	TEMPERATURE RATING	
192030165	A-T-302	22-18 (0.3-1.0mm ²)	.330 / (8.4)	.060 / (1.5)	.130 / (3.3)	COPPER	.032 / (0.8)	650F (342C)	
192030172	B-T-304	16-14 (1.2-2.0mm ²)	.330 / (8.4)	.091 / (2.3)	.160 / (4.1)	COPPER	.032 / (0.8)	650F (342C)	
192030169	C-T-303	12-10 (3.0-6.0mm ²)	.330 / (8.4)	.130 / (3.3)	.225 / (5.7)	COPPER	.040 / (1.0)	650F (342C)	

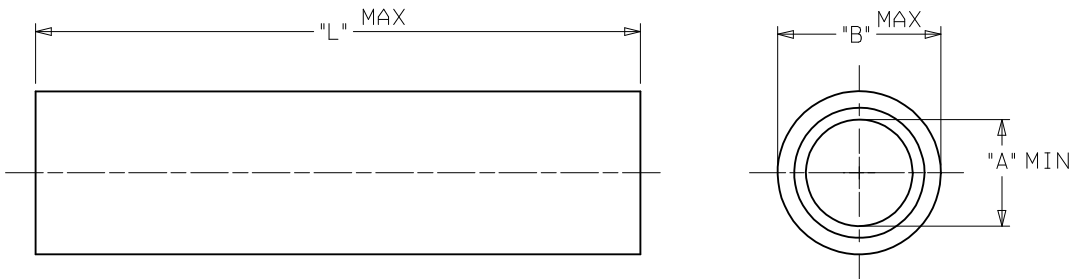

NOTES:
1. PLATING: ELECTRO-NICKEL.
2. ALL DIMENSIONS IN INCHES/(MM).
3. RoHS COMPLIANT

RELEASE FOR PROD EC NO: ETC2007-0146 DRAWN: JLOMASTRO 2006/10/11 CHKD: JMACNEIL 2006/10/11 APPR: JMACNEIL 2006/10/12 A	DESCRIPTION REV	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE IN/MM		SCALE	DESIGN UNITS INCH	THIRD ANGLE PROJECTION	
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	mm	INCH	DRAWN BY JLOMASTRO	DATE 10/02/06	TITLE PARALLEL SPLICE VERSAKRIMP TEMP TERMS MOLLEX INCORPORATED DOCUMENT NO. SD-19203-042 SHEET NO. 1 OF 1			
			4 PLACES	± ---	± ---	CHECKED BY JMACNEIL		DATE 10/02/06		
			3 PLACES	± ---	± .010	APPROVED BY RDEROSS		DATE 10/04/06		
			2 PLACES	± 0.25	± .01	MATERIAL NO. SEE CHART				
1 PLACE	± 0.3	± ---	ANGULAR ±1/2°							