
MATERIAL NUMBER	ENGINEERING P/N	WIRE SIZE	INSULATION COLOR	I.D. MIN.	MWID*	"D" MAX.	"L" MAX.
192060012	D-655X	8	RED	.165/4.19	.33/8.3 (A)	.398/10.11	1.07/27.2
192060013	E-661X	6	BLUE	.230/5.84	.44/11.1	.467/11.86	1.30/33.0
192060015	F-655X	4	YELLOW	.277/7.03	.60/15.2	.537/13.64	1.39/35.3

(A)

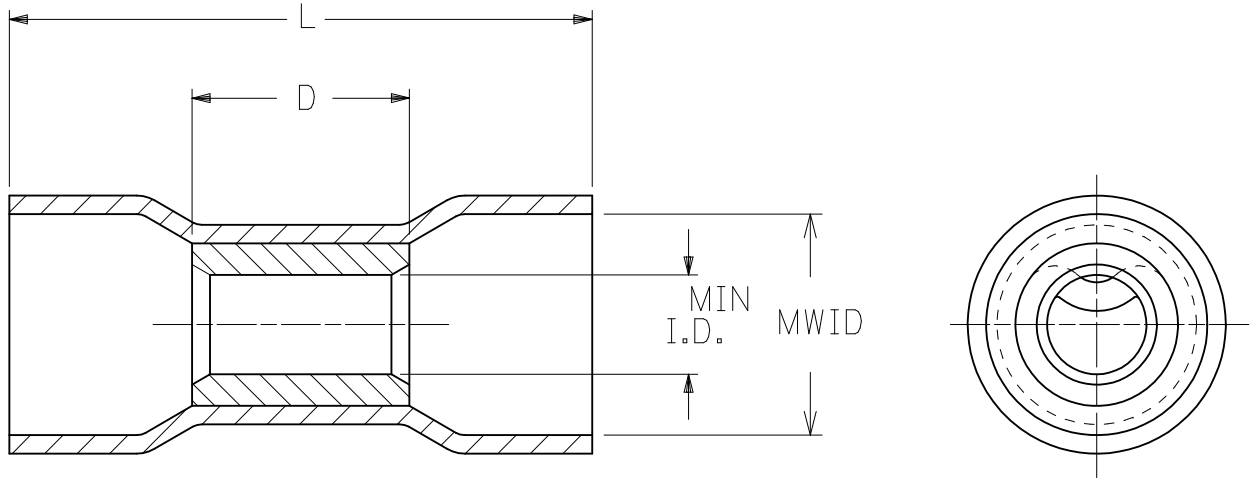

NOTES:
1. MATERIALS:
   SPLICE: MATTE-TIN PLATED COPPER
   INSULATION: PVC
2. MWID = MAXIMUM WIRE INSULATION DIAMETER
3. PARTS ARE ROHS COMPLIANT.

(A)

REDRAWN FROM DOC CD-21100

REDRAW, D MWID 2011/05/12
EC NO: WNA2011-0558 2011/05/12
DRWN:ETHRODAHL CH'KD:JMACNEIL 2011/05/12
APPR: JMACNEIL
DESCRIPTION
A
REV

QUALITY SYMBOLS
▼=0
Ⓒ=0

GENERAL TOLERANCES (UNLESS SPECIFIED)

	mm	INCH
4 PLACES	± ---	± ---
3 PLACES	± ---	± .005
2 PLACES	± 0.13	± .01
1 PLACE	± 0.25	± ---
ANGULAR ±---°		

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE: IN/MM (A)
SCALE: ---
DESIGN UNITS: INCH
THIRD ANGLE PROJECTION

DRAWN BY: RCM DATE: 1996/04/15
CHECKED BY: RWD DATE: 1996/04/15
APPROVED BY: JMACNEIL DATE: 2011/05/12

TITLE: INSULKRIMP SEAMLESS PARALLEL CONNECTORS SALES DRAWING

molex MOLEX INCORPORATED

MATERIAL NO.: SEE CHART
DOCUMENT NO.: SD-19206-001 (A)
SHEET NO.: 1 OF 1

SIZE A

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION