

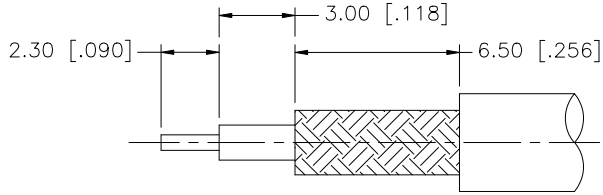


REV.	DATE	DESCRIPTION
NC	07/18/97	INITIAL RELEASE
A	07/31/07	UPDATE DRAWING FORMAT

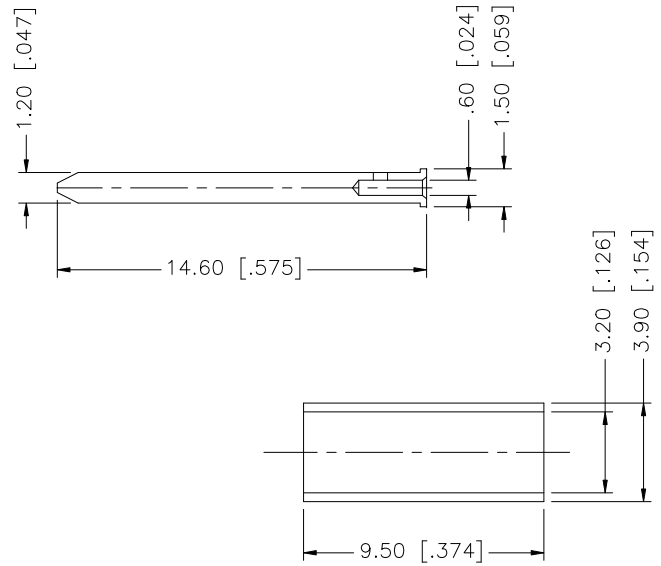

RECOMMENDED
CABLE STRIPPING DIMS

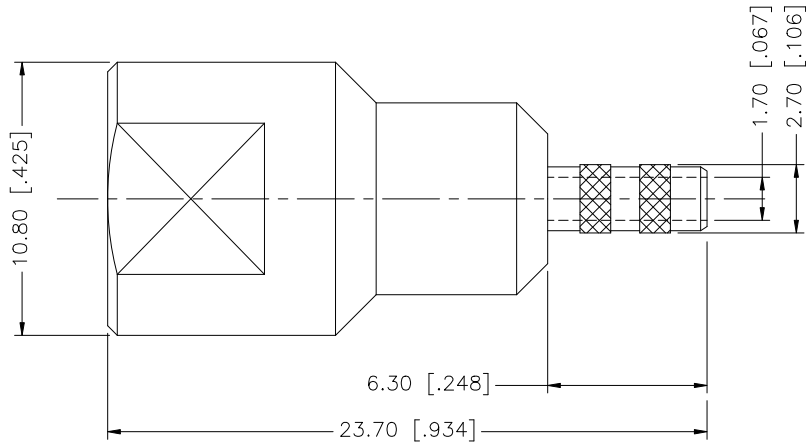

8					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020”	APPROVALS	DATE	Amphenol Connex						
7						DRAWN	G.R.S.						07/31/07	
6						CHECKED								
5						ISSUED			PART DESCRIPTION					
4	FERRULE	BRASS	NICKEL	1			SHEET	1 OF 1		FME CRIMP PLUG (FOR RG-174/U, 188A/U, 316/U CABLE)				
3	CONTACT PIN	BRASS	GOLD	1		CAD FILE			PART NO.					
2	INSULATOR	TEFLON	NATURAL	1		C:/192/192114.DWG			192114					
1	BODY	BRASS	NICKEL	1					DWG. NO.		192114.DWG	REV. A	SIZE A	SCALE NA
	DESCRIPTION	MATERIAL	FINISH	QTY	DO NOT SCALE DRAWING									