# ON Semiconductor

# Is Now



**To learn more about onsemi™, please visit our website at**
**www.onsemi.com**

**onsemi** and onsemi and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "**onsemi**" or its affiliates and/or subsidiaries in the United States and/or other countries. **onsemi** owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of **onsemi** product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. **onsemi** reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and **onsemi** makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using **onsemi** products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by **onsemi**. "Typical" parameters which may be provided in **onsemi** data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. **onsemi** does not convey any license under any of its intellectual property rights nor the rights of others. **onsemi** products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use **onsemi** products for any such unintended or unauthorized application, Buyer shall indemnify and hold **onsemi** and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that **onsemi** was negligent regarding the design or manufacture of the part. **onsemi** is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner. Other names and brands may be claimed as the property of others.

Ordering number : EN4511D

# 1SV264

## PIN Diode

## Dual series PIN Diode for VHF, UHF and AGC 50V, 50mA, $r_S$=typ 2.5Ω, MCP

ON Semiconductor®

http://onsemi.com

### Features

- Series connection of 2 elements in an ultlasmall package facilitates high-density mounting and permits 1SV264-applied equipment to be made smaller
- Small interterminal capacitance(C=0.23pF typ)
- Small forward series resistance($r_S$=2.5Ω typ)

### Specifications

**Absolute Maximum Ratings** at Ta=25°C


| Parameter | Symbol | Conditions | Ratings | Unit |
|---|---|---|---|---|
| Reverse Voltage | $V_R$ | | 50 | V |
| Forward Current | $I_F$ | | 50 | mA |
| Allowable Power Dissipation | P | | 100 | mW |
| Junction Temperature | Tj | | 125 | °C |
| Storage Temperature | Tstg | | −55 to +125 | °C |

Stresses exceeding Maximum Ratings may damage the device. Maximum Ratings are stress ratings only. Functional operation above the Recommended Operating Conditions is not implied. Extended exposure to stresses above the Recommended Operating Conditions may affect device reliability.

### Package Dimensions

unit : mm (typ)


7023A-007

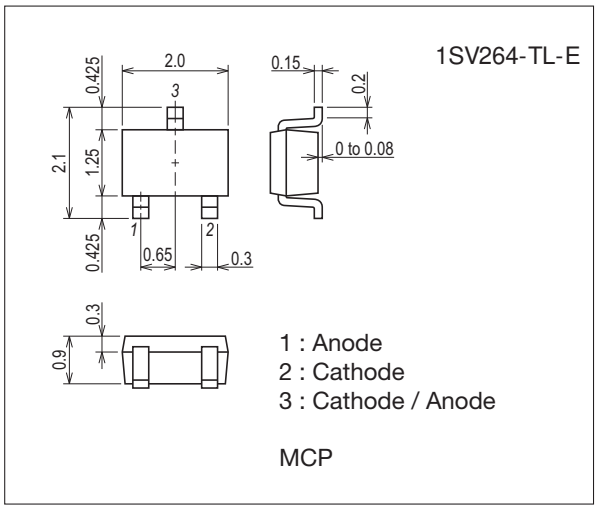



### Product & Package Information

- Package : MCP
- JEITA, JEDEC : SC-70, SOT-323
- Minimum Packing Quantity : 3,000 pcs./reel


### Packing Type: TL




### Marking




### Electrical Connection



## Electrical Characteristics at Ta=25°C


| Parameter | Symbol | Conditions | Ratings | | | Unit |
|---|---|---|---|---|---|---|
| | | | min | typ | max | |
| Reverse Voltage | $V_R$ | $I_R$=10μA | 50 | | | V |
| Reverse Current | $I_R$ | $V_R$=50V | | | 0.1 | μA |
| Forward Voltage | $V_F$ | $I_F$=50mA | | 0.91 | 0.95 | V |
| Interterminal Capacitance | C | $V_R$=50V, f=1MHz | | 0.23 | 0.4 | pF |
| Series Resistance | $r_s$ | $I_F$=5mA, f=100MHz | | 4.0 | 8.0 | Ω |
| | | $I_F$=10mA, f=100MHz | | 2.5 | 4.5 | Ω |

Note : The specifications shown above are for each individual diode.


## Ordering Information

| Device | Package | Shipping | memo |
|---|---|---|---|
| 1SV264-TL-E | MCP | 3,000pcs./reel | Pb Free |


$I_F - V_F$

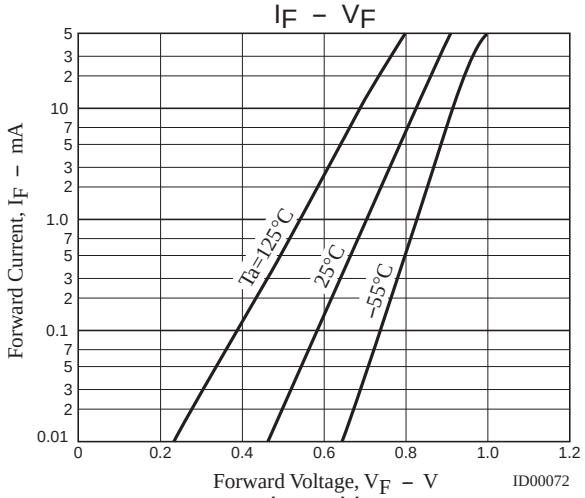



$C - V_R$

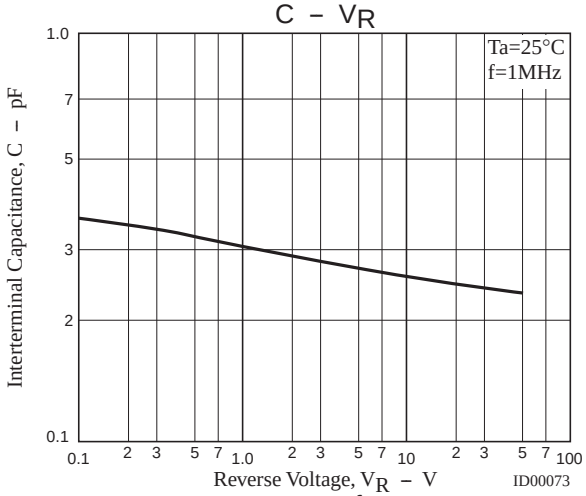



$I_R - V_R$

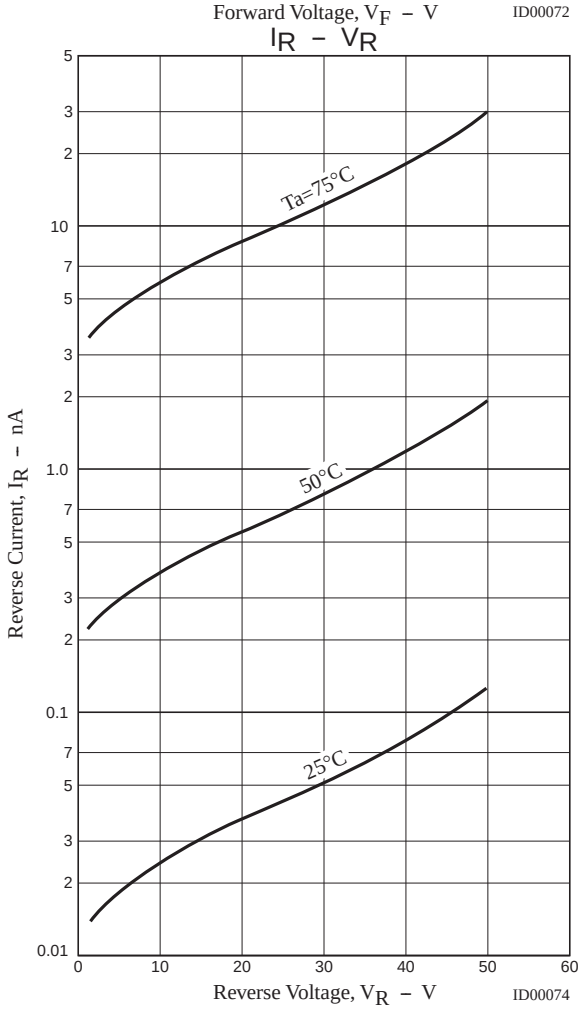


$r_S - f$

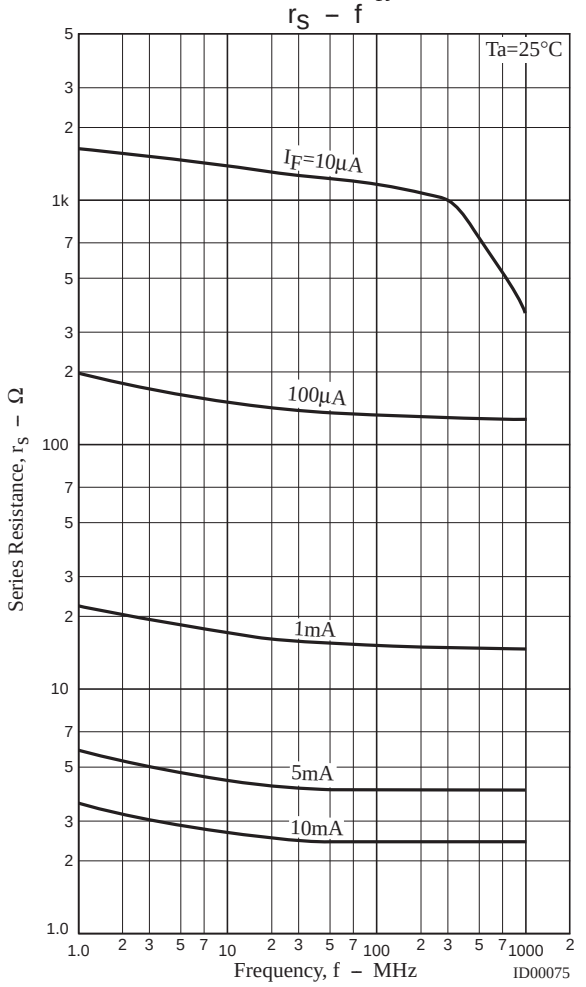


$r_S - I_F$

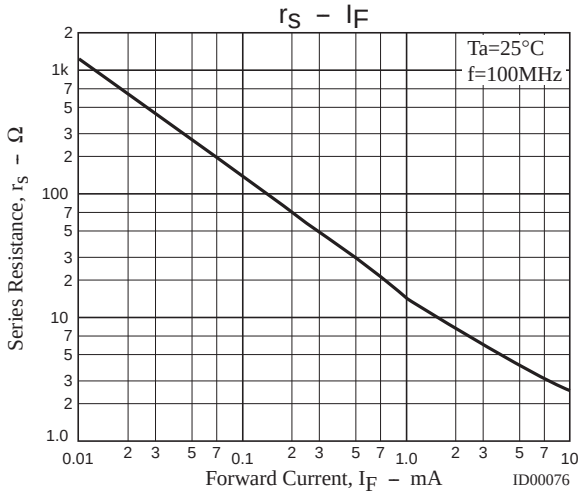


**Embossed Taping Specification**

1SV264-TL-E

## 1. Packing Format

| Package Name | Carrier Tape Type | Maximum Number of devices contained (pcs) | | | Packing format | |
|---|---|---|---|---|---|---|
| | | Reel | Inner box | Outer box | Inner BOX (C-1) | Outer BOX (A-7) |
| MCP | MCP | 3,000 | 15,000 | 90,000 | 5 reels contained<br>Dimensions:mm (external)<br>183×72×185 | 6 inner boxes contained<br>Dimensions:mm (external)<br>440×195×210 |


Packing method



Reel label

Reel label, Inner box label


(unit:mm)

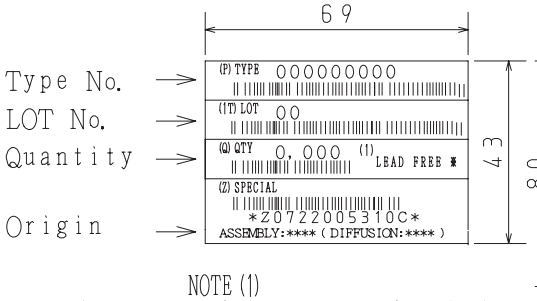


Type No.
LOT No.
Quantity
Origin

Outer box label

It is a label at the time of factory shipments. The form of a label may change in physical distribution process.





NOTE (1)

The LEAD FREE ※ description shows that the surface treatment of the terminal is lead free.


| Label | JEITA Phase |
|---|---|
| LEAD FREE 3 | JEITA Phase 3A |
| LEAD FREE 4 | JEITA Phase 3 |

## 2. Taping configuration

### 2-1. Carrier tape size (unit:mm)

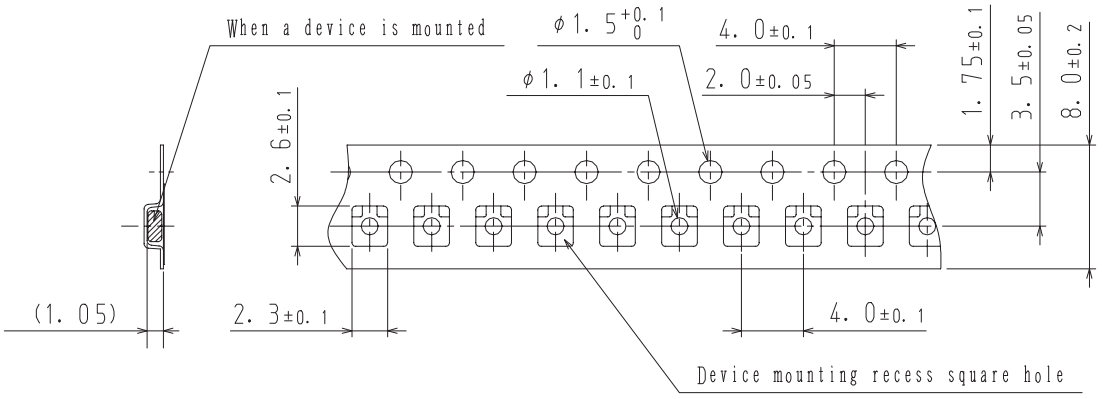



### 2-2. Device placement direction

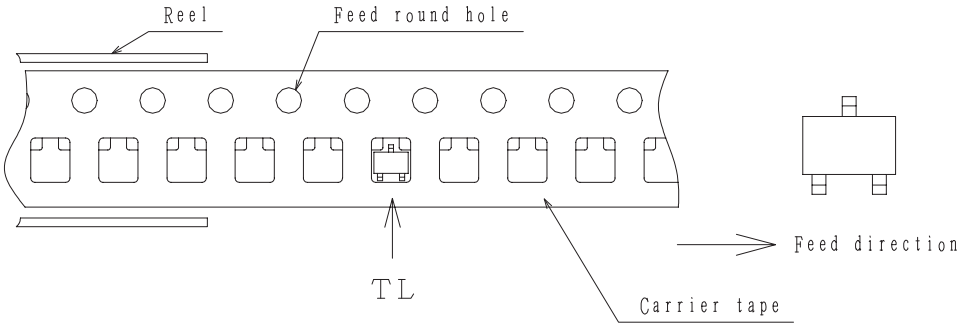



Those with oen electrode terminal on the feed hole side·····TL

## Outline Drawing

1SV264-TL-E

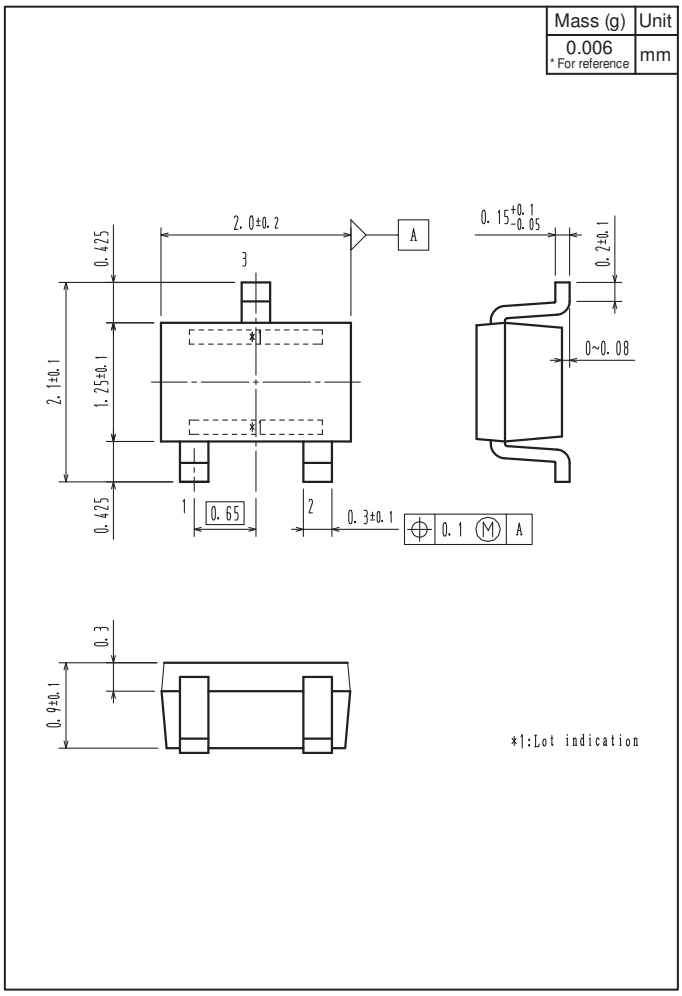


## Land Pattern Example

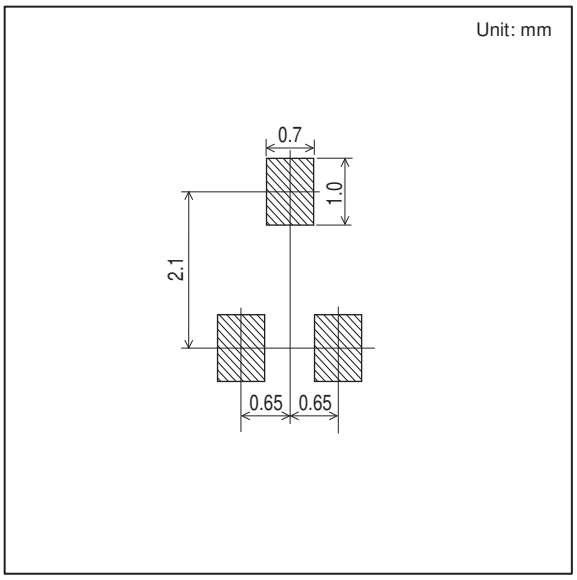

ON Semiconductor and the ON logo are registered trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of SCILLC's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.