
THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20
© COPYRIGHT 20 BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.


LOC	DIST
-	-


REVISIONS


P	LTR	DESCRIPTION	DATE	DWN	APVD
	2	REVISED CONTACT LEAD-IN GEOMETRY	25FEB2008	RB	JD
	3	REMOVED 7 AND 9 STRAND COUNT	14MAY2008	JD	JD

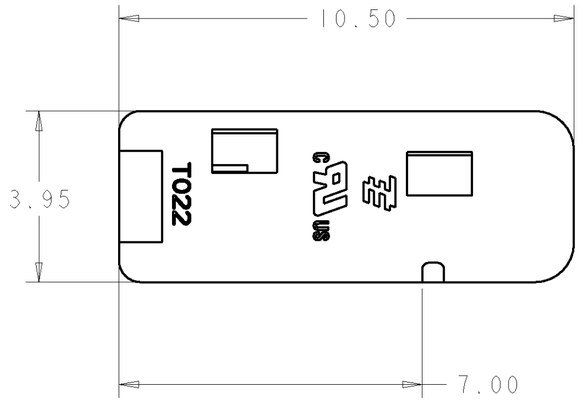

1. MATERIALS AND FINISH:
   - HOUSING: LCP
   - CONTACTS: COPPER ALLOY, FINISH: TIN
2. MUST COMPLY WITH DIRECTIVE 2002/95/EC (ROHS)
3. THIS PRODUCT HAS NOT COMPLETED VALIDATION TESTING
4. WIRE TYPES AND SIZES ACCEPTED
   18, 20 AND 22 AWG SOLID WIRE
   18 AND 20 AWG PREBOND STRANDED WIRE
   18 AWG STRANDED WIRE (16 STRAND COUNT)
   MAX INSULATION OD: 2.10 MM (.083")
   STRIP LENGTH: 7.0±1.0 (.276")
5. PACKAGED IN TAPE AND REEL PER EIA-481 SPECIFICATIONS

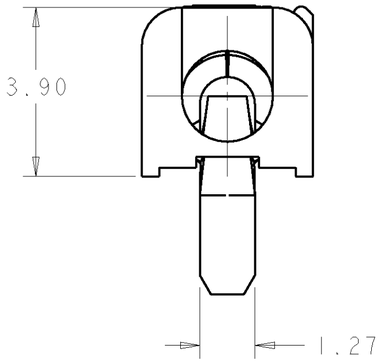

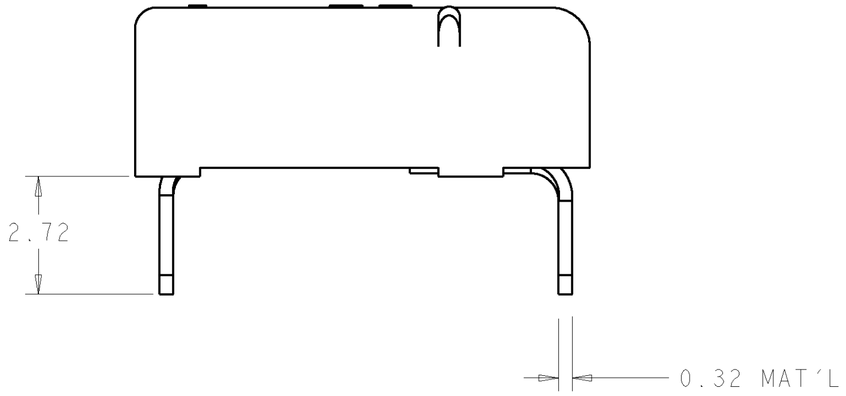

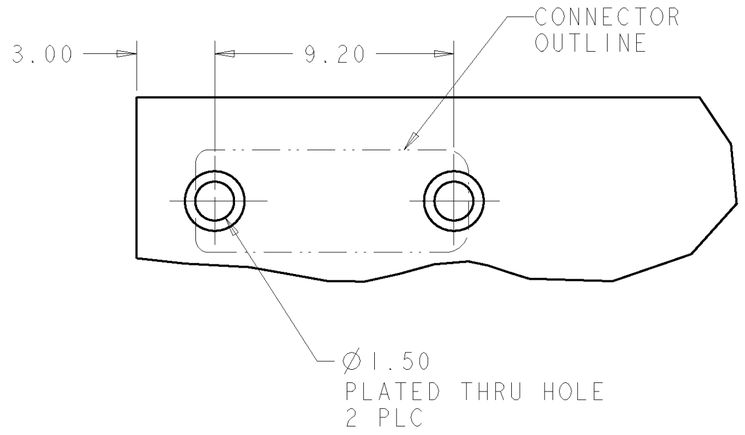

RECOMMENDED PCB LAYOUT
SCALE 6:1

PROPOSED DESIGN

NOT PRODUCTION TOOLED

DESIGN IS SUBJECT TO CHANGE WITHOUT NOTICE

THIS DRAWING IS A CONTROLLED DOCUMENT FOR TYCO ELECTRONICS CORPORATION IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±-
1 PLC ±0.5
2 PLC ±0.10
3 PLC ±-
4 PLC ±-
ANGLES ±3°

MATERIAL 1 -

FINISH 1 -

DWN GURURAJ S 17OCT2007
CHK -
APVD -
PRODUCT SPEC -
APPLICATION SPEC -
WEIGHT -

CUSTOMER DRAWING

Tyco Electronics
Harrisburg, PA 17105-3608

2008839-1
PART NUMBER

NAME
POKE-IN LED CONNECTOR ASSEMBLY
1 POSITION - THRU HOLE
-

SIZE	CAGE CODE	DRAWING NO.	RESTRICTED TO
A2	00779	C-2008839	-

SCALE 10:1 SHEET 1 OF 1 REV 3