

MULTICAT™ CIRCULAR

Wire-To-Wire

CONNECTOR SYSTEM

Female Crimp Terminal	Male Crimp Terminal
	
Series: 201846 [13A-30A]	Series: 201845 [13A-30A]

Receptacle Housing	Plug Housing
	
Series: 200915	Series: 200914

PRE-RELEASE
REFERENCE
USE ONLY

[MultiCat Power Connectors Web Page](#)

[TABLE OF CONTENTS](#)



REVISION:	ECM INFORMATION:	TITLE:				SHEET No.
A3	EC No: 621344 DATE: 25 / 7 / 2019	PRODUCT SPECIFICATION FOR MULTICAT™ CIRCULAR CONNECTOR SYSTEM (WtW)				1 of 15
DOCUMENT NUMBER:		DOC TYPE:	DOC PART:	CREATED / REVISED BY:	CHECKED BY:	APPROVED BY:
2009140003PS		PS	000	MANOHAR	MANOHAR	ISHWAR
Molex is a registered trademark of Molex, LLC in the United States of America and may be registered in other countries; all other trademarks listed herein belong to their respective owners.						

Table of Contents

ITEMS	PAGE
1.0 SCOPE	3
2.0 PRODUCT DESCRIPTION	3
2.1 DESCRIPTION, SERIES NUMBER, AND LINKS	3
2.2 DIMENSIONS, MATERIALS, PLATINGS	3
2.3 ENVIRONMENTAL CONFORMANCE	3
2.4 SAFETY AGENCY LISTINGS	3
3.0 APPLICABLE DOCUMENTS AND SPECIFICATION	3
3.1 MOLEX DOCUMENTS	3
3.2 INDUSTRY DOCUMENTS	4
4.0 ELECTRICAL PERFORMANCE RATINGS	4
4.1 VOLTAGE	4
4.2 APPLICABLE WIRES	4
4.3 CURRENT RATING (MAXIMUM AMPERES)	4
4.4 TEMPERATURE	8
4.5 DURABILITY	8
5.0 QUALIFICATION	8
6.0 PERFORMANCE	9
6.1 ELECTRICAL PERFORMANCE	9
6.2 MECHANICAL PERFORMANCE	10
6.3 ENVIRONMENTAL PERFORMANCE	12
7.0 TEST SEQUENCE GROUPS	13
8.0 PACKAGING	15
9.0 POLARIZATION AND KEYING OPTIONS	15



[MultiCat Power Connectors Web Page](#)

[TABLE OF CONTENTS](#)



REVISION:	ECM INFORMATION:	TITLE:					SHEET No.
A3	EC No: 621344 DATE: 25 / 7 / 2019	PRODUCT SPECIFICATION FOR MULTICAT™ CIRCULAR CONNECTOR SYSTEM (WtW)					2 of 15
DOCUMENT NUMBER:		DOC TYPE:	DOC PART:	CREATED / REVISED BY:	CHECKED BY:	APPROVED BY:	
2009140003PS		PS	000	MANOHAR	MANOHAR	ISHWAR	
Molex is a registered trademark of Molex, LLC in the United States of America and may be registered in other countries; all other trademarks listed herein belong to their respective owners.							

1.0 SCOPE

This Product Specification covers 3 CKT circular wire to wire connector system terminated with 10 to 18 AWG wire using Crimp technology on standard High-Power contacts.

2.0 PRODUCT DESCRIPTION**2.1 DESCRIPTION, SERIES NUMBER, AND LINKS**

DESCRIPTION	SERIES NUMBER
Female Crimp Terminal	201846 [13A-30A]
Male Crimp Terminal	201845 [13A-30A]
Receptacle Housing	200915
Plug Housing	200914

2.2 DIMENSIONS, MATERIALS, PLATINGS

REFER 2009150003 PSD, 2009140003 PSD, 2018450010PSD, 2018450020PSD, 2018450030PSD, 2018460010PSD, 2018460020PSD AND 2018460030PSD.

2.3 ENVIRONMENTAL CONFORMANCE

To find product compliance information:

- [Go to Molex.com](#)
- Enter the part number in the search field.
- At the bottom of the page go to "Environmental" to see compliance status.

2.4 SAFETY AGENCY LISTINGS

UL / cUL File Number: E29179

3.0 APPLICABLE DOCUMENTS AND SPECIFICATION**3.1 MOLEX DOCUMENTS**

[MultiCat Circular Connectors Test summary 2009140003-TS-000](#)
[MultiCat Circular Connectors Application summary 2009140003-AS-000](#)
[Molex Quality Crimping Handbook Order No. 63800-0029](#)
[Molex Package Handling Specification 454990100-PK](#)
 ATS – Application Tooling Specification*

*Application Tooling Specification for terminals is not provided in this document. ATS for terminals can be available from respective terminal part number page in Molex.com

[MultiCat Power Connectors Web Page](#)

[TABLE OF CONTENTS](#)



REVISION:	ECM INFORMATION:	TITLE:				SHEET No.
A3	EC No: 621344 DATE: 25 / 7 / 2019	PRODUCT SPECIFICATION FOR MULTICAT™ CIRCULAR CONNECTOR SYSTEM (WtW)				3 of 15
DOCUMENT NUMBER:		DOC TYPE:	DOC PART:	CREATED / REVISED BY:	CHECKED BY:	APPROVED BY:
2009140003PS		PS	000	MANOHAR	MANOHAR	ISHWAR

Malox is a registered trademark of Malox, LLC in the United States of America and may be registered in other countries; all other trademarks listed herein belong to their respective owners.

3.2 INDUSTRY DOCUMENTS

EIA-364-1000

4.0 ELECTRICAL PERFORMANCE RATINGS

4.1 VOLTAGE

1000 Volts AC

4.2 APPLICABLE WIRES

Wire Style	AWG	Nominal Insulation Diameter
UL1199	10	4.03mm
	12	3.40mm
	14	2.92mm
	16	2.59mm
	18	2.36mm

4.3 CURRENT RATING (MAXIMUM AMPERES)

Note: Ratings shown represent *MAXIMUM* current carrying capacity of a fully loaded connector with all circuits powered using **UL1199** stranded wire. Ratings are based on a 30°C maximum temperature rise limit over ambient (see section 6.1.4 for specifications). Current is dependent on connector size, ambient temperature, printed circuit board characteristics and related factors. Actual current rating is application dependent and should be evaluated for each use.

AWG Wire Size	3 Circuit
10	30 amps @ 30°C
12	26 amps @ 30°C
14	20 amps @ 30°C
16	16 amps @ 30°C
18	13 amps @ 30°C



PRE-RELEASE
REFERENCE
USE ONLY

[MultiCat Power Connectors Web Page](#)

[TABLE OF CONTENTS](#)



REVISION:	ECM INFORMATION:	TITLE:				SHEET No.
A3	EC No: 621344 DATE: 25 / 7 / 2019	PRODUCT SPECIFICATION FOR MULTICAT™ CIRCULAR CONNECTOR SYSTEM (WtW)				4 of 15
DOCUMENT NUMBER:		DOC TYPE:	DOC PART:	CREATED / REVISED BY:	CHECKED BY:	APPROVED BY:
2009140003PS		PS	000	MANOHAR	MANOHAR	ISHWAR
Molex is a registered trademark of Molex, LLC in the United States of America and may be registered in other countries; all other trademarks listed herein belong to their respective owners.						

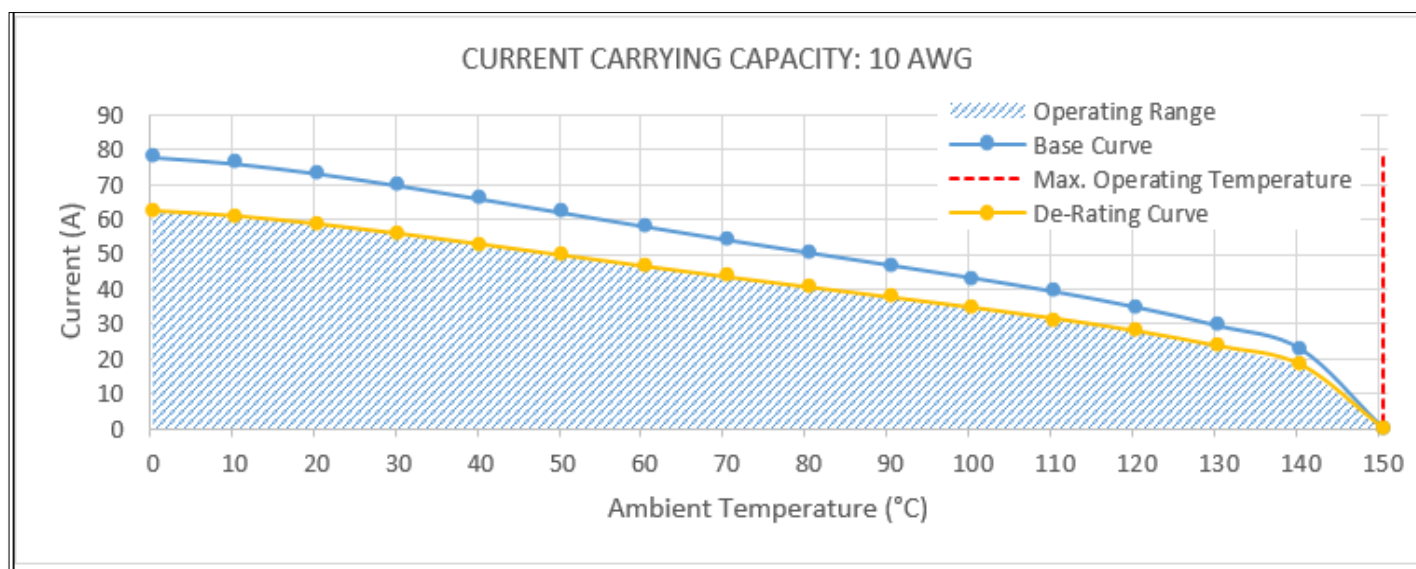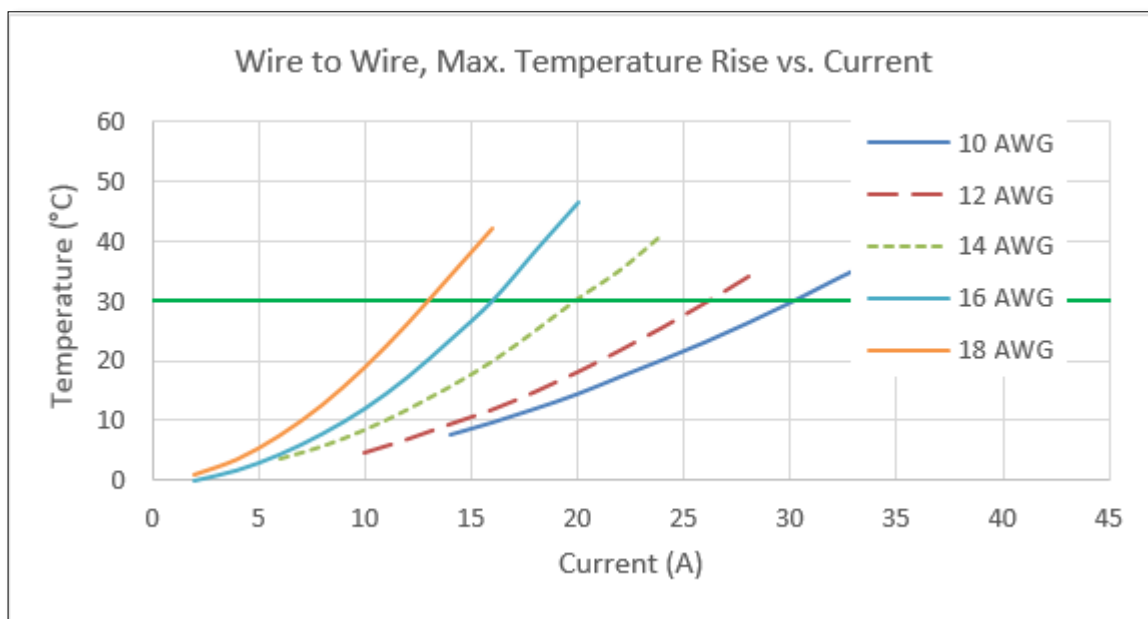

PRE-RELEASE
REFERENCE
USE ONLY


[MultiCat Power Connectors Web Page](#)

[TABLE OF CONTENTS](#)




REVISION: A3	ECM INFORMATION: EC No: 621344 DATE: 25 / 7 / 2019	TITLE: PRODUCT SPECIFICATION FOR MULTICAT™ CIRCULAR CONNECTOR SYSTEM (WtW)	SHEET No. 5 of 15
DOCUMENT NUMBER: 2009140003PS	DOC TYPE: PS	DOC PART: 000	CREATED / REVISED BY: MANOHAR
	CHECKED BY: MANOHAR	APPROVED BY: ISHWAR	

CURRENT CARRYING CAPACITY: 12 AWG

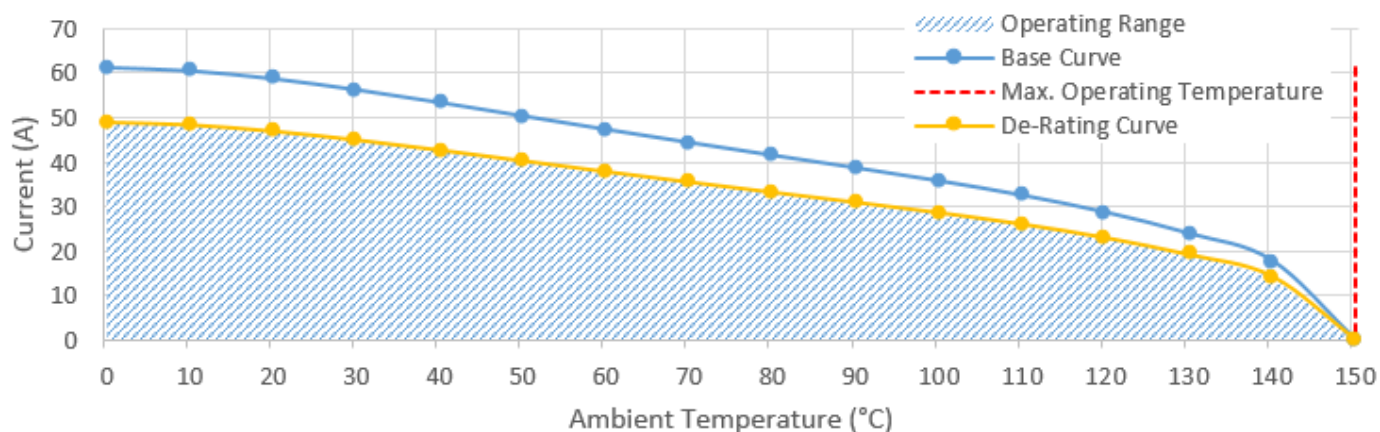

CURRENT CARRYING CAPACITY: 14 AWG

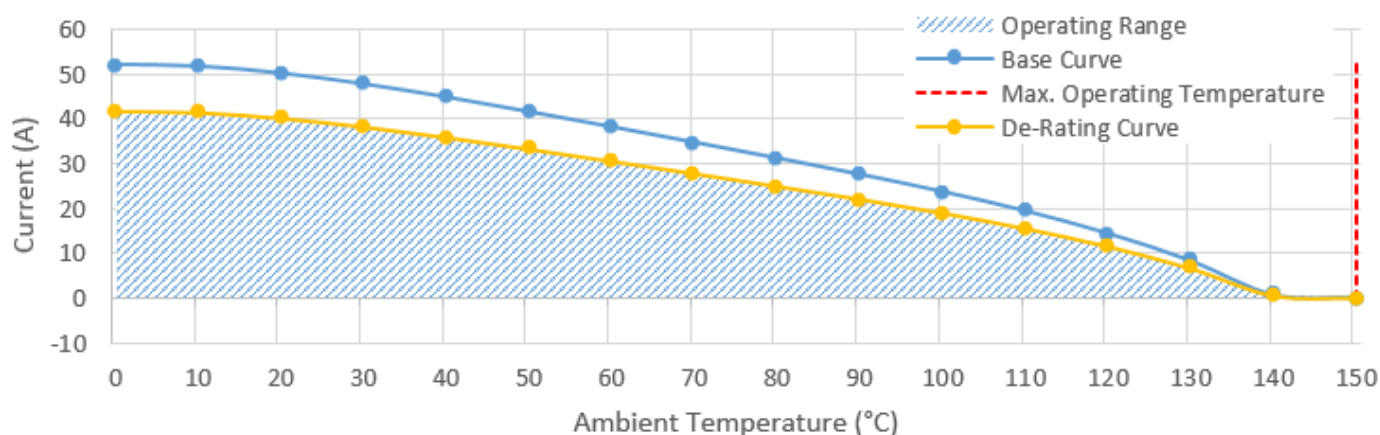

PRE-RELEASE
REFERENCE
USE ONLY


[MultiCat Power Connectors Web Page](#)

[TABLE OF CONTENTS](#)




REVISION: A3	ECM INFORMATION: EC No: 621344 DATE: 25 / 7 / 2019	TITLE: PRODUCT SPECIFICATION FOR MULTICAT™ CIRCULAR CONNECTOR SYSTEM (WtW)	SHEET No. 6 of 15
DOCUMENT NUMBER: 2009140003PS	DOC TYPE: PS	DOC PART: 000	CREATED / REVISED BY: MANOHAR
		CHECKED BY: MANOHAR	APPROVED BY: ISHWAR

CURRENT CARRYING CAPACITY: 16 AWG

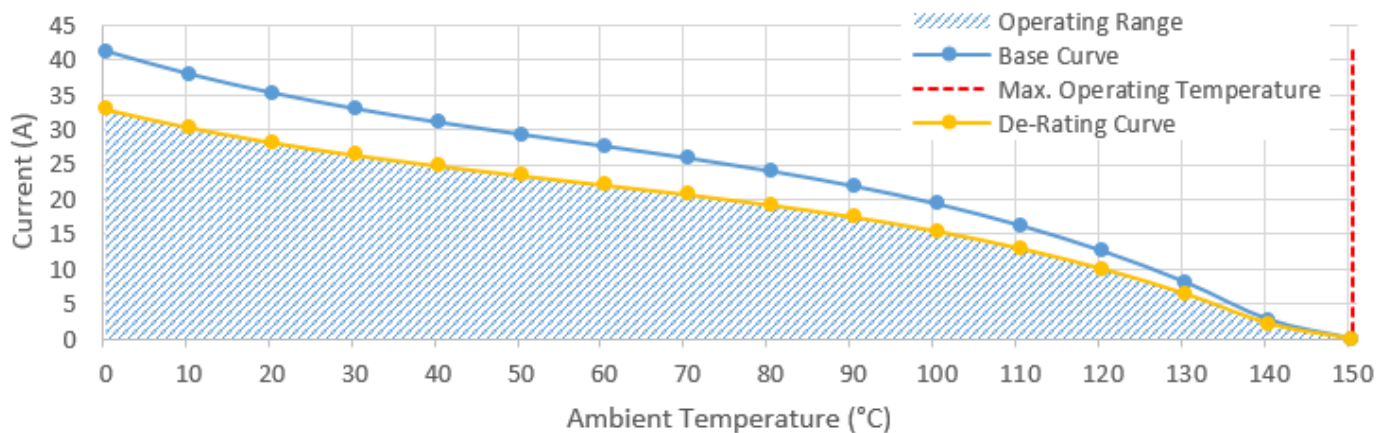

CURRENT CARRYING CAPACITY: 18 AWG

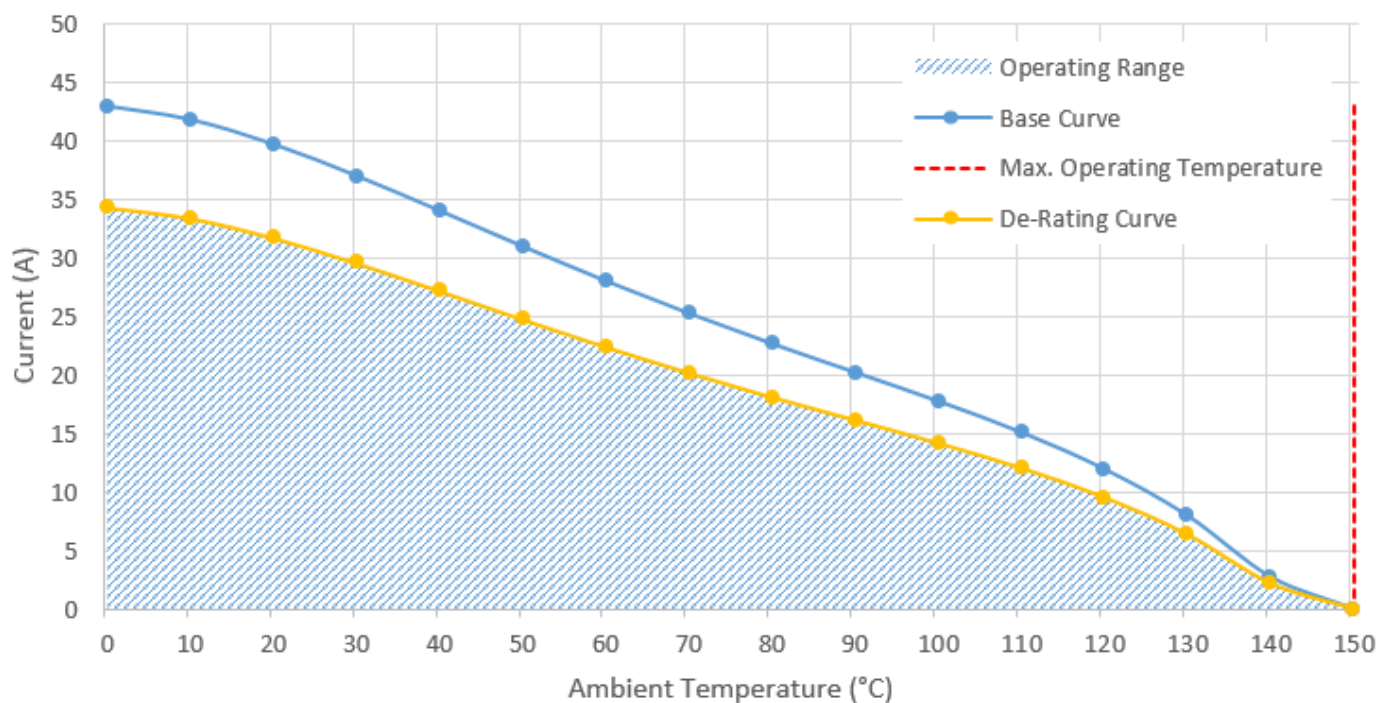

[MultiCat Power Connectors Web Page](#)

[TABLE OF CONTENTS](#)



REVISION: A3	ECM INFORMATION: EC No: 621344 DATE: 25 / 7 / 2019	TITLE: PRODUCT SPECIFICATION FOR MULTICAT™ CIRCULAR CONNECTOR SYSTEM (WtW)	SHEET No. 7 of 15
DOCUMENT NUMBER: 2009140003PS	DOC TYPE: PS	DOC PART: 000	CREATED / REVISED BY: MANOHAR
		CHECKED BY: MANOHAR	APPROVED BY: ISHWAR

4.4 TEMPERATURE

Operating Temperature Range : - 40°C to + 150°C

4.5 DURABILITY

Plating Type	Number of Cycles
Gold Plated	500

As tested in accordance with EIA-364-1000 test method (see sec 6.2.8 of this specification). Durability per EIA-364-09

5.0 QUALIFICATION

Laboratory condition, sample selection and test sequences are in accordance with EIA-364-1000.



[MultiCat Power Connectors Web Page](#)

[TABLE OF CONTENTS](#)



REVISION:	ECM INFORMATION:	TITLE:				SHEET No.
A3	EC No: 621344 DATE: 25 / 7 / 2019	PRODUCT SPECIFICATION FOR MULTICAT™ CIRCULAR CONNECTOR SYSTEM (WtW)				8 of 15
DOCUMENT NUMBER:		DOC TYPE:	DOC PART:	CREATED / REVISED BY:	CHECKED BY:	APPROVED BY:
2009140003PS		PS	000	MANOHAR	MANOHAR	ISHWAR
Molex is a registered trademark of Molex, LLC in the United States of America and may be registered in other countries; all other trademarks listed herein belong to their respective owners.						

6.0 PERFORMANCE

6.1 ELECTRICAL PERFORMANCE

ITEM	DESCRIPTION	TEST CONDITION	REQUIREMENT
6.1.1	Contact Resistance (Low Level)	Mate connectors: apply a maximum voltage of 20 mV and a current of 100 mA. EIA-364-23C	1 milliohms MAXIMUM [initial]
6.1.2	Insulation Resistance	Mate connectors: Apply a voltage of 500 VDC between adjacent terminals and between terminals to ground. EIA-364-21C	1000 Megohms MINIMUM
6.1.3	Dielectric Withstanding Voltage	Apply a voltage of 3000 VAC for 1 minute between adjacent terminals EIA-364-20D	No breakdown; current leakage < 5 mA
6.1.4	Temperature Rise versus current (Step profiling)	Mate connectors: measure the temperature rise at the rated current. EIA-364-70, Method 2	Temperature rise: +30°C MAXIMUM (above ambient)
6.1.5	Temperature rise versus current (18-day stability test)	Mate connectors, measure the temperature rise at the rated current, 2 measurements per day, test method 3 (30 Min on & 15 min off) Per EIA-364-55 Test condition A	Temperature rise: +30°C MAXIMUM (above ambient)

PRE-RELEASE
REFERENCE
USE ONLY

[MultiCat Power Connectors Web Page](#)

[TABLE OF CONTENTS](#)



REVISION:	ECM INFORMATION:	TITLE:				SHEET No.
A3	EC No: 621344 DATE: 25 / 7 / 2019	PRODUCT SPECIFICATION FOR MULTICAT™ CIRCULAR CONNECTOR SYSTEM (WtW)				9 of 15
DOCUMENT NUMBER:		DOC TYPE:	DOC PART:	CREATED / REVISED BY:	CHECKED BY:	APPROVED BY:
2009140003PS		PS	000	MANOHAR	MANOHAR	ISHWAR
Molox is a registered trademark of Molox LLC in the United States of America and may be registered in other countries; all other trademarks listed herein belong to their respective owners.						

6.2 MECHANICAL PERFORMANCE

ITEM	DESCRIPTION	TEST CONDITION	REQUIREMENT	
6.2.1	Connector Mate and Unmate Forces (Latch disengaged) Initial	Mate and unmate connector (male to female) at a rate of 25 ± 6 mm ($1 \pm \frac{1}{4}$ inch) per minute. EIA-364-13E	50.0 N MAXIMUM Mate force & 15.0 N MINIMUM Unmate force	
6.2.2	Thumb Latch Yield Strength (Without terminal)	Unmate housing (plug to receptacle) at a rate of 25 ± 6 mm ($1 \pm \frac{1}{4}$ inch) per minute. EIA-364-13E	75 N Minimum	
6.2.3	Crimp Terminal Insertion Force (into Housing)	Apply an axial insertion force on the terminal at a rate of 25 ± 6 mm ($1 \pm \frac{1}{4}$ inch).	40 N MAXIMUM insertion force	
6.2.4	Crimp Terminal Retention Force (From Housing) Initial	Axial pullout force on the terminal in the housing at a rate of 25 ± 6 mm ($1 \pm \frac{1}{4}$ inch) per minute.	175 N Minimum retention force	
6.2.5	Crimp Terminal Retention Force (From Housing) After High Temperature exposure test		150 N Minimum retention force	
6.2.6	Latch Strength Test TR 54307	The latch should be cycled a total of 500 times, at a rate of 250 to 300 cycles per hour (per EIA-364-09), and inspect for cracks and other deformation or damage every 50 cycles. Finally, a latch strength test should be performed after cycling and meet 75 N Min force.	75 N MINIMUM	
6.2.7	Wire Pullout Force (Axial)	Apply an axial pullout force on the wire at a rate of 25 ± 6 mm ($1 \pm \frac{1}{4}$ inch). UL1977 Edition 2	AWG	MIN pullout force
			10	355 N
			12	275 N
			14	200 N
			16	135 N
			18	90 N

[MultiCat Power Connectors Web Page](#)

[TABLE OF CONTENTS](#)



REVISION:	ECM INFORMATION:	TITLE:	SHEET No.		
A3	EC No: 621344 DATE: 25 / 7 / 2019	PRODUCT SPECIFICATION FOR MULTICAT™ CIRCULAR CONNECTOR SYSTEM (WtW)	10 of 15		
DOCUMENT NUMBER:	DOC TYPE:	DOC PART:	CREATED / REVISED BY:	CHECKED BY:	APPROVED BY:
2009140003PS	PS	000	MANOHAR	MANOHAR	ISHWAR

6.2 MECHANICAL PERFORMANCE CONTINUED

ITEM	DESCRIPTION	TEST CONDITION	REQUIREMENT
6.2.8	Durability-500 cycle EIA-364-1000 Test Group 7A& 7B	Mate connector: Test as per EIA-364-09	5 milliohms MAXIMUM (change from initial) & Dielectric withstanding voltage: no breakdown; Current leakage < 5 MA & Visual: No Damage
6.2.9	Vibration (Random) + Mechanical Shock Test Group 3	Mate connectors and vibrate per EIA 364-28, test condition VII. Letter D. (acceleration 3.1 g) Mechanical shock- per EIA-364-27C Test condition H	5 milliohms MAXIMUM (Change from initial) & Discontinuity < 1 Microsecond



[MultiCat Power Connectors Web Page](#)

[TABLE OF CONTENTS](#)



REVISION:	ECM INFORMATION:	TITLE:				SHEET No.
A3	EC No: 621344 DATE: 25 / 7 / 2019	PRODUCT SPECIFICATION FOR MULTICAT™ CIRCULAR CONNECTOR SYSTEM (WtW)				11 of 15
DOCUMENT NUMBER:		DOC TYPE:	DOC PART:	CREATED / REVISED BY:	CHECKED BY:	APPROVED BY:
2009140003PS		PS	000	MANOHAR	MANOHAR	ISHWAR
Molex is a registered trademark of Molex, LLC in the United States of America and may be registered in other countries; all other trademarks listed herein belong to their respective owners.						

6.3 ENVIRONMENTAL PERFORMANCE

ITEM	DESCRIPTION	TEST CONDITION	REQUIREMENT										
6.3.1	Shock (Thermal) EIA-364-1000 Test Group 2A & 2B	Mate connectors; expose to 5 cycles of: <table><tr><th>Temperature °C</th><th>Duration (Minutes)</th></tr><tr><td>-40 +0/-3</td><td>30</td></tr><tr><td>+25 ±10</td><td>5 MAXIMUM</td></tr><tr><td>+150 +3/-0</td><td>30</td></tr><tr><td>+25 ±10</td><td>5 MAXIMUM</td></tr></table> EIA-364-32F,Method A, Test condition IV	Temperature °C	Duration (Minutes)	-40 +0/-3	30	+25 ±10	5 MAXIMUM	+150 +3/-0	30	+25 ±10	5 MAXIMUM	5 milliohms MAXIMUM (change from initial) & Visual: No Damage
Temperature °C	Duration (Minutes)												
-40 +0/-3	30												
+25 ±10	5 MAXIMUM												
+150 +3/-0	30												
+25 ±10	5 MAXIMUM												
6.3.2	Cyclic Temperature & Humidity EIA-364-1000 Test Group 2A& 2B	Mate connectors: cycle per EIA-364-31: 24 cycles at temperature 25 ± 3°C at 80 ± 5% relative humidity and 65 ± 3°C at 50 ± 5% relative humidity; dwell time of 1.0 hour; ramp time of 0.5 hours.	5 milliohms MAXIMUM (change from initial)										
6.3.3	Mixed Flow Gas EIA-364-1000 Test Group 4	EIA-364-1000 Table 5 – Test Group 4	5 milliohms MAXIMUM (change from initial)										
6.3.4	High Temperature Exposure @ 150C as per USCAR-2 5.6.3 Refer to table 5.9.6	Place the samples in the chamber, set to the maximum ambient temperature, so that there is no substantial obstruction to air flow across and around the samples, and the samples are not touching each other. Leave the samples in the chamber for 1008 hours	5 milliohms MAXIMUM (change from initial) Terminal-connector Retention force 150N Minimum & Visual: No Damage										

PRE-RELEASE
REFERENCE
USE ONLY

[MultiCat Power Connectors Web Page](#)


[TABLE OF CONTENTS](#)



REVISION:	ECM INFORMATION:	TITLE:				SHEET No.
A3	EC No: 621344 DATE: 25 / 7 / 2019	PRODUCT SPECIFICATION FOR MULTICAT™ CIRCULAR CONNECTOR SYSTEM (WtW)				12 of 15
DOCUMENT NUMBER:		DOC TYPE:	DOC PART:	CREATED / REVISED BY:	CHECKED BY:	APPROVED BY:
2009140003PS		PS	000	MANOHAR	MANOHAR	ISHWAR
Molex is a registered trademark of Molex, LLC in the United States of America and may be registered in other countries; all other trademarks listed herein belong to their respective owners.						

7.0 TEST SEQUENCE GROUPS

Reliability Test Sequences per EIA-364-1000

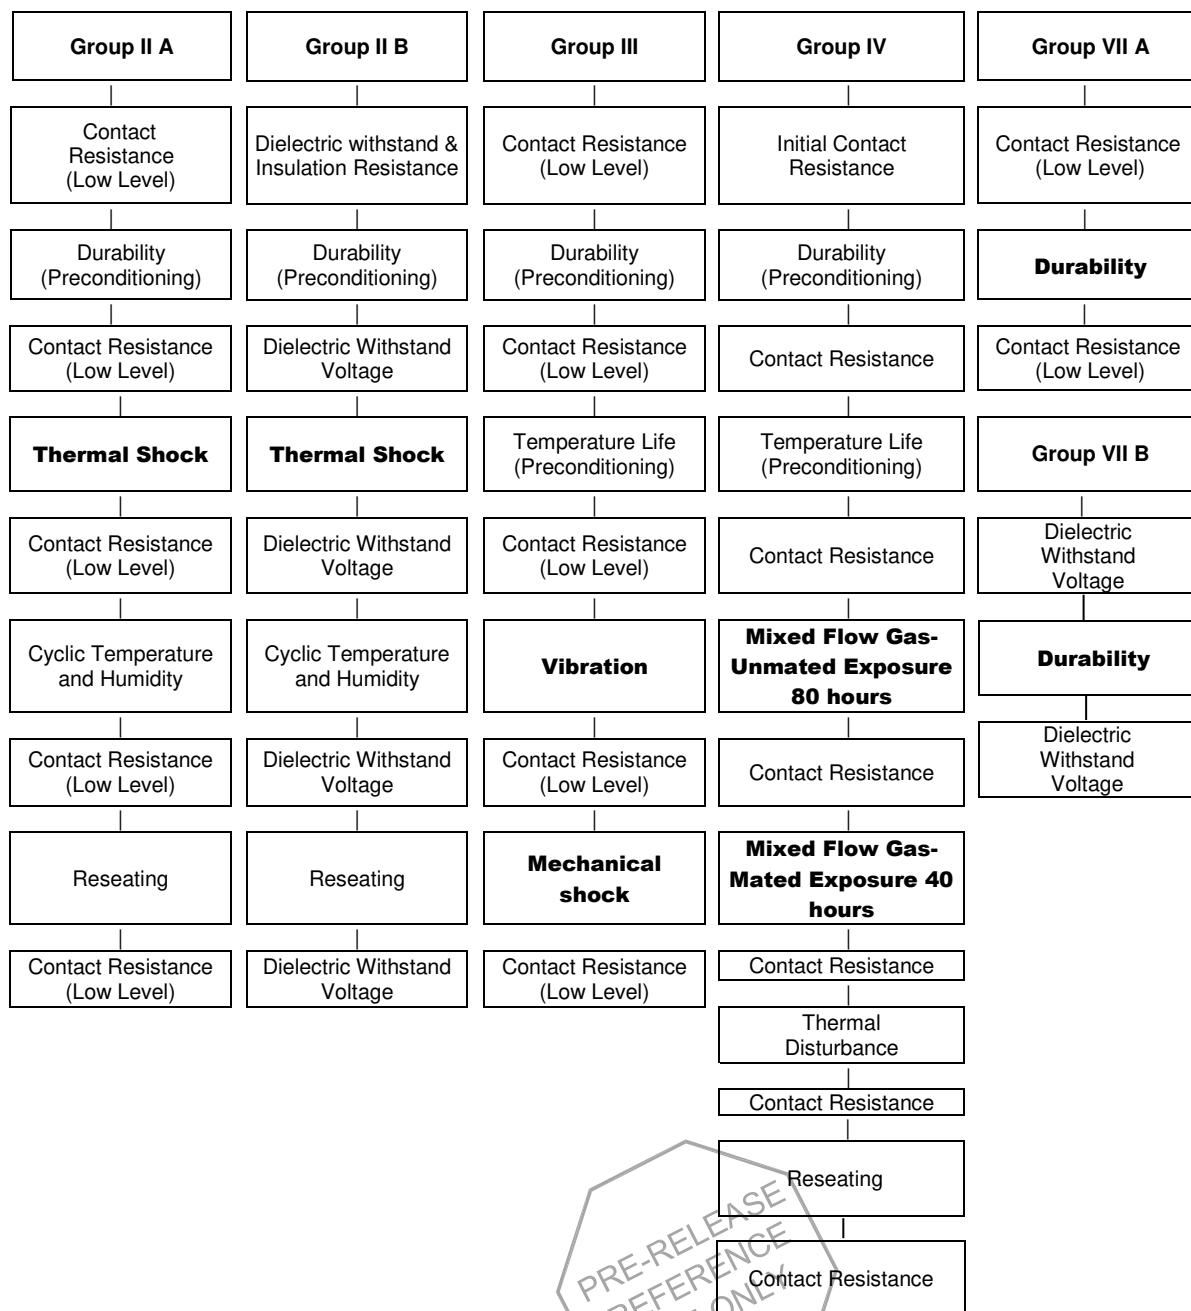

[MultiCat Power Connectors Web Page](#)

[TABLE OF CONTENTS](#)



REVISION:	ECM INFORMATION:	TITLE:	SHEET No.
A3	EC No: 621344 DATE: 25 / 7 / 2019	PRODUCT SPECIFICATION FOR MULTICAT™ CIRCULAR CONNECTOR SYSTEM (WtW)	13 of 15
DOCUMENT NUMBER:	DOC TYPE:	DOC PART:	CREATED / REVISED BY:
2009140003PS	PS	000	MANOHAR
		CHECKED BY:	APPROVED BY:
		MANOHAR	ISHWAR

High Temperature Exposure @ 150° C as per USCAR-2 5.6.3 table 5.9.6

Dry Circuit Resistance

Connector and/or terminal cycling

Dry Circuit Resistance

High Temperature 150°C for 1008 hours

Dry Contact Resistance

Terminal-Connector Retention Force

Temperature Rise

T-Rise Profiling

Steady State Temperature Rise

Individual Tests

Connector Mate / Un-mate Force

Crimp Terminal Insertion force

Crimp Terminal Retention force

Thumb Latch Yield Strength

Wire Pullout force (Axial)

Latch Strength Test

PRE-RELEASE
REFERENCE
USE ONLY

[MultiCat Power Connectors Web Page](#)

[TABLE OF CONTENTS](#)




REVISION:	ECM INFORMATION:	TITLE:				SHEET No.
A3	EC No: 621344 DATE: 25 / 7 / 2019	PRODUCT SPECIFICATION FOR MULTICAT™ CIRCULAR CONNECTOR SYSTEM (WtW)				14 of 15
DOCUMENT NUMBER:	DOC TYPE:	DOC PART:	CREATED / REVISED BY:	CHECKED BY:	APPROVED BY:	
2009140003PS	PS	000	MANOHAR	MANOHAR	ISHWAR	

8.0 PACKAGING


Parts shall be packaged to protect the parts from damage during standard shipping, storage, and handling. Refer Molex.com specific part number webpage to get the exact packaging document for that item.

9.0 POLARIZATION AND KEYING OPTIONS

9.1 Receptacle Housing (Series: [200915](#))

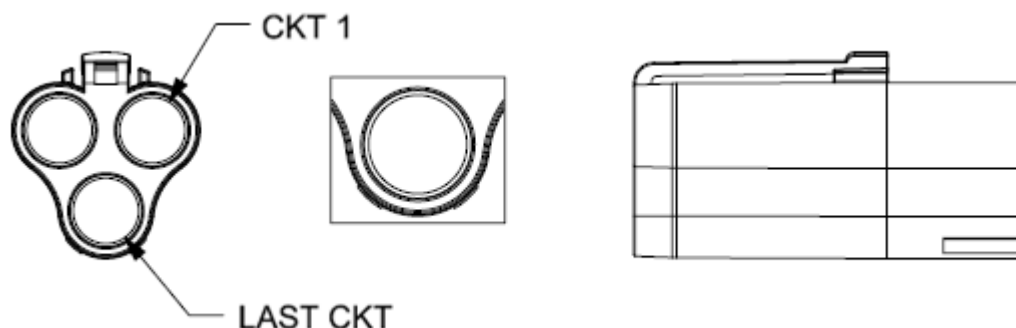

9.2 Plug Housing (Series: [200914](#))

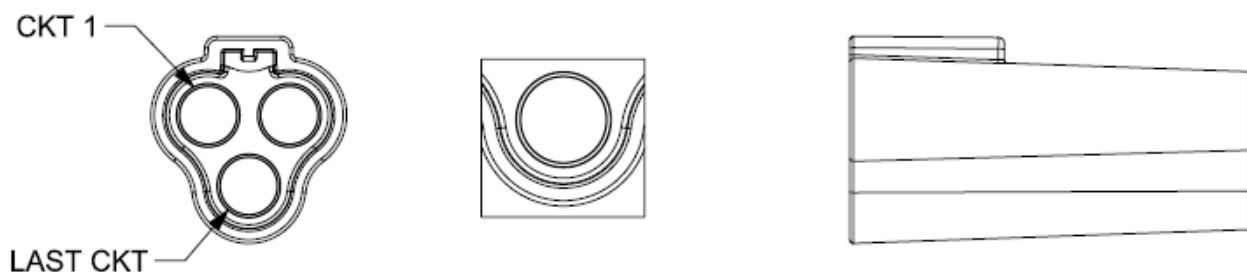

PRE-RELEASE
REFERENCE
USE ONLY

[MultiCat Power Connectors Web Page](#)

[TABLE OF CONTENTS](#)



REVISION:	ECM INFORMATION:	TITLE:					SHEET No.
A3	EC No: 621344 DATE: 25 / 7 / 2019	PRODUCT SPECIFICATION FOR MULTICAT™ CIRCULAR CONNECTOR SYSTEM (WtW)					15 of 15
DOCUMENT NUMBER:		DOC TYPE:	DOC PART:	CREATED / REVISED BY:	CHECKED BY:	APPROVED BY:	
2009140003PS		PS	000	MANOHAR	MANOHAR	ISHWAR	
Molex is a registered trademark of Molex, LLC in the United States of America and may be registered in other countries; all other trademarks listed herein belong to their respective owners.							