


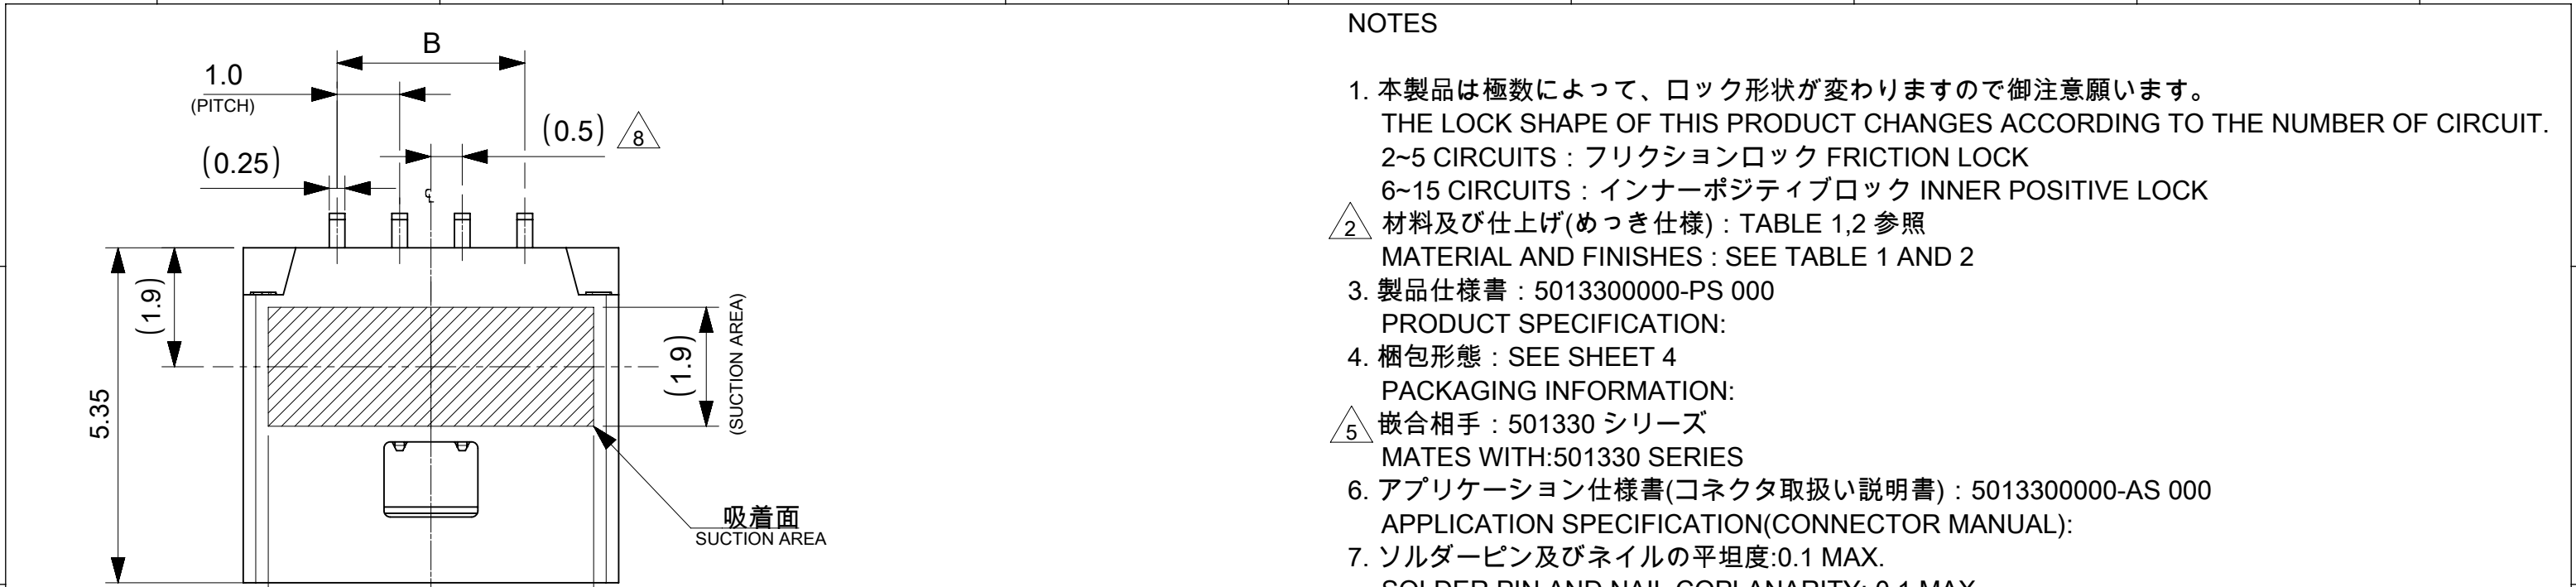

- NOTES
1. 本製品は極数によって、ロック形状が変わりますので御注意願います。
THE LOCK SHAPE OF THIS PRODUCT CHANGES ACCORDING TO THE NUMBER OF CIRCUIT.
2~5 CIRCUITS : フリクションロック FRICTION LOCK
6~15 CIRCUITS : インナーポジティブロック INNER POSITIVE LOCK

2. 材料及び仕上げ(めっき仕様) : TABLE 1,2 参照
MATERIAL AND FINISHES : SEE TABLE 1 AND 2

3. 製品仕様書 : 5013300000-PS 000
PRODUCT SPECIFICATION:

4. 梱包形態 : SEE SHEET 4
PACKAGING INFORMATION:

5. 嵌合相手 : 501330 シリーズ
MATES WITH:501330 SERIES

6. アプリケーション仕様書(コネクタ取扱い説明書) : 5013300000-AS 000
APPLICATION SPECIFICATION(CONNECTOR MANUAL):

7. ソルダーピン及びネイルの平坦度:0.1 MAX.
SOLDER PIN AND NAIL COPLANARITY: 0.1 MAX.


8. 偶数極に適用
APPLY FOR EVEN CIRCUIT

9. その他金めっき厚品及び錫めっき品は以下の図面を御参照ください。
PLEASE REFER TO THE FOLLOWING DRAWING FOR OTHER GOLD PLATING VERSION AND TIN PLATING VERSION.

PLATING	PLATING THICKNESS [micro-meter MIN.]	SERIES No.	DRAWING No.
TIN	1.0	501568	5015680000-SD PSD 000
GOLD	0.1	202396	2023960000-SD PSD 000
	0.76	203559	2035590000-SD PSD 000

2 TABLE 1


番号 NO.	部品 PART	材質 MATERIAL	
①	ウエハー WAFER	ポリアミド(PA), UL94V-0, 色 : SEE SHEET 6 POLYAMIDE(PA), UL94V-0, COLOR : SEE SHEET 6	
②	ソルダーピン SOLDER PIN	リン青銅 PHOSPHOR BRONZE	
		接点部 CONTACT AREA	金めっき : 0.38 MICRO-METER MIN. GOLD PLATING
		テール部 TAIL AREA	金めっき : 0.05 MICRO-METER MIN. GOLD PLATING
		下地めっき UNDER PLATING	ニッケルめっき : 1.27 MICRO-METER MIN. NICKEL
③	ネイル NAIL	黄銅 BRASS	
		テール部 TAIL AREA	錫めっき : 1.0 MICRO-METER MIN. MATTE TIN PLATING
		下地めっき UNDER PLATING	ニッケルめっき : 1.0 MICRO-METER MIN. NICKEL

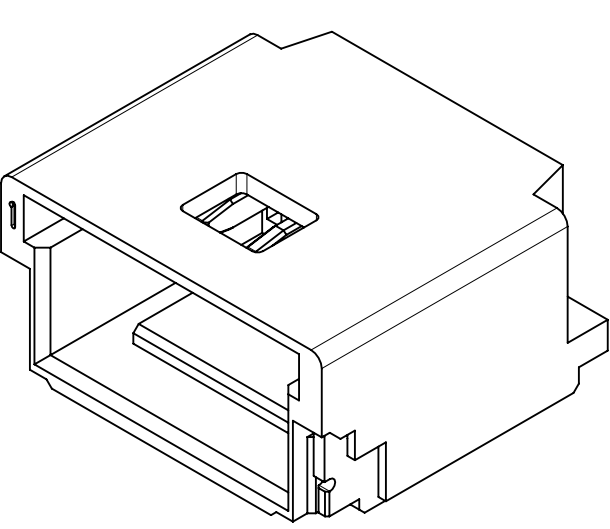




6.2	4.0	7.0	5
5.2	3.0	6.0	4
4.2	2.0	5.0	3
3.2	1.0	4.0	2
C	B	A	極数 CIRCUIT SIZE

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			
DIMENSION UNITS mm	SCALE NTS	CURRENT REV DESC:	
GENERAL TOLERANCES (UNLESS SPECIFIED)		EC NO: 794263	
ANGULAR TOL	± 3.0 °	DRWN: MIKEDA01 2024/06/20	
4 PLACES	± 0.2	CHK'D: SAKIYAMA 2024/09/26	
3 PLACES	± 0.2	APPR: AIDA 2024/09/27	
2 PLACES	± 0.2	INITIAL REVISION:	
1 PLACE	± 0.2	DRWN: AISHIKAWA 2019/04/02	
0 PLACES	± 0.2	APPR: KOMURAKAMI 2019/04/05	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION	DRAWING A3-SIZE
		SERIES 203558	MATERIAL NUMBER SEE SHEET 6
		CUSTOMER	SHEET NUMBER 1 OF 6

molex			
PICO-CLASP 1.0 W/B SINGLE ROW RA SMT INNER LOCK GOLD PLATING 0.38 MICRO-METER			
PRODUCT CUSTOMER DRAWING			
DOCUMENT NUMBER 2035580000-SD	DOC TYPE PSD	DOC PART 000	REVISION D

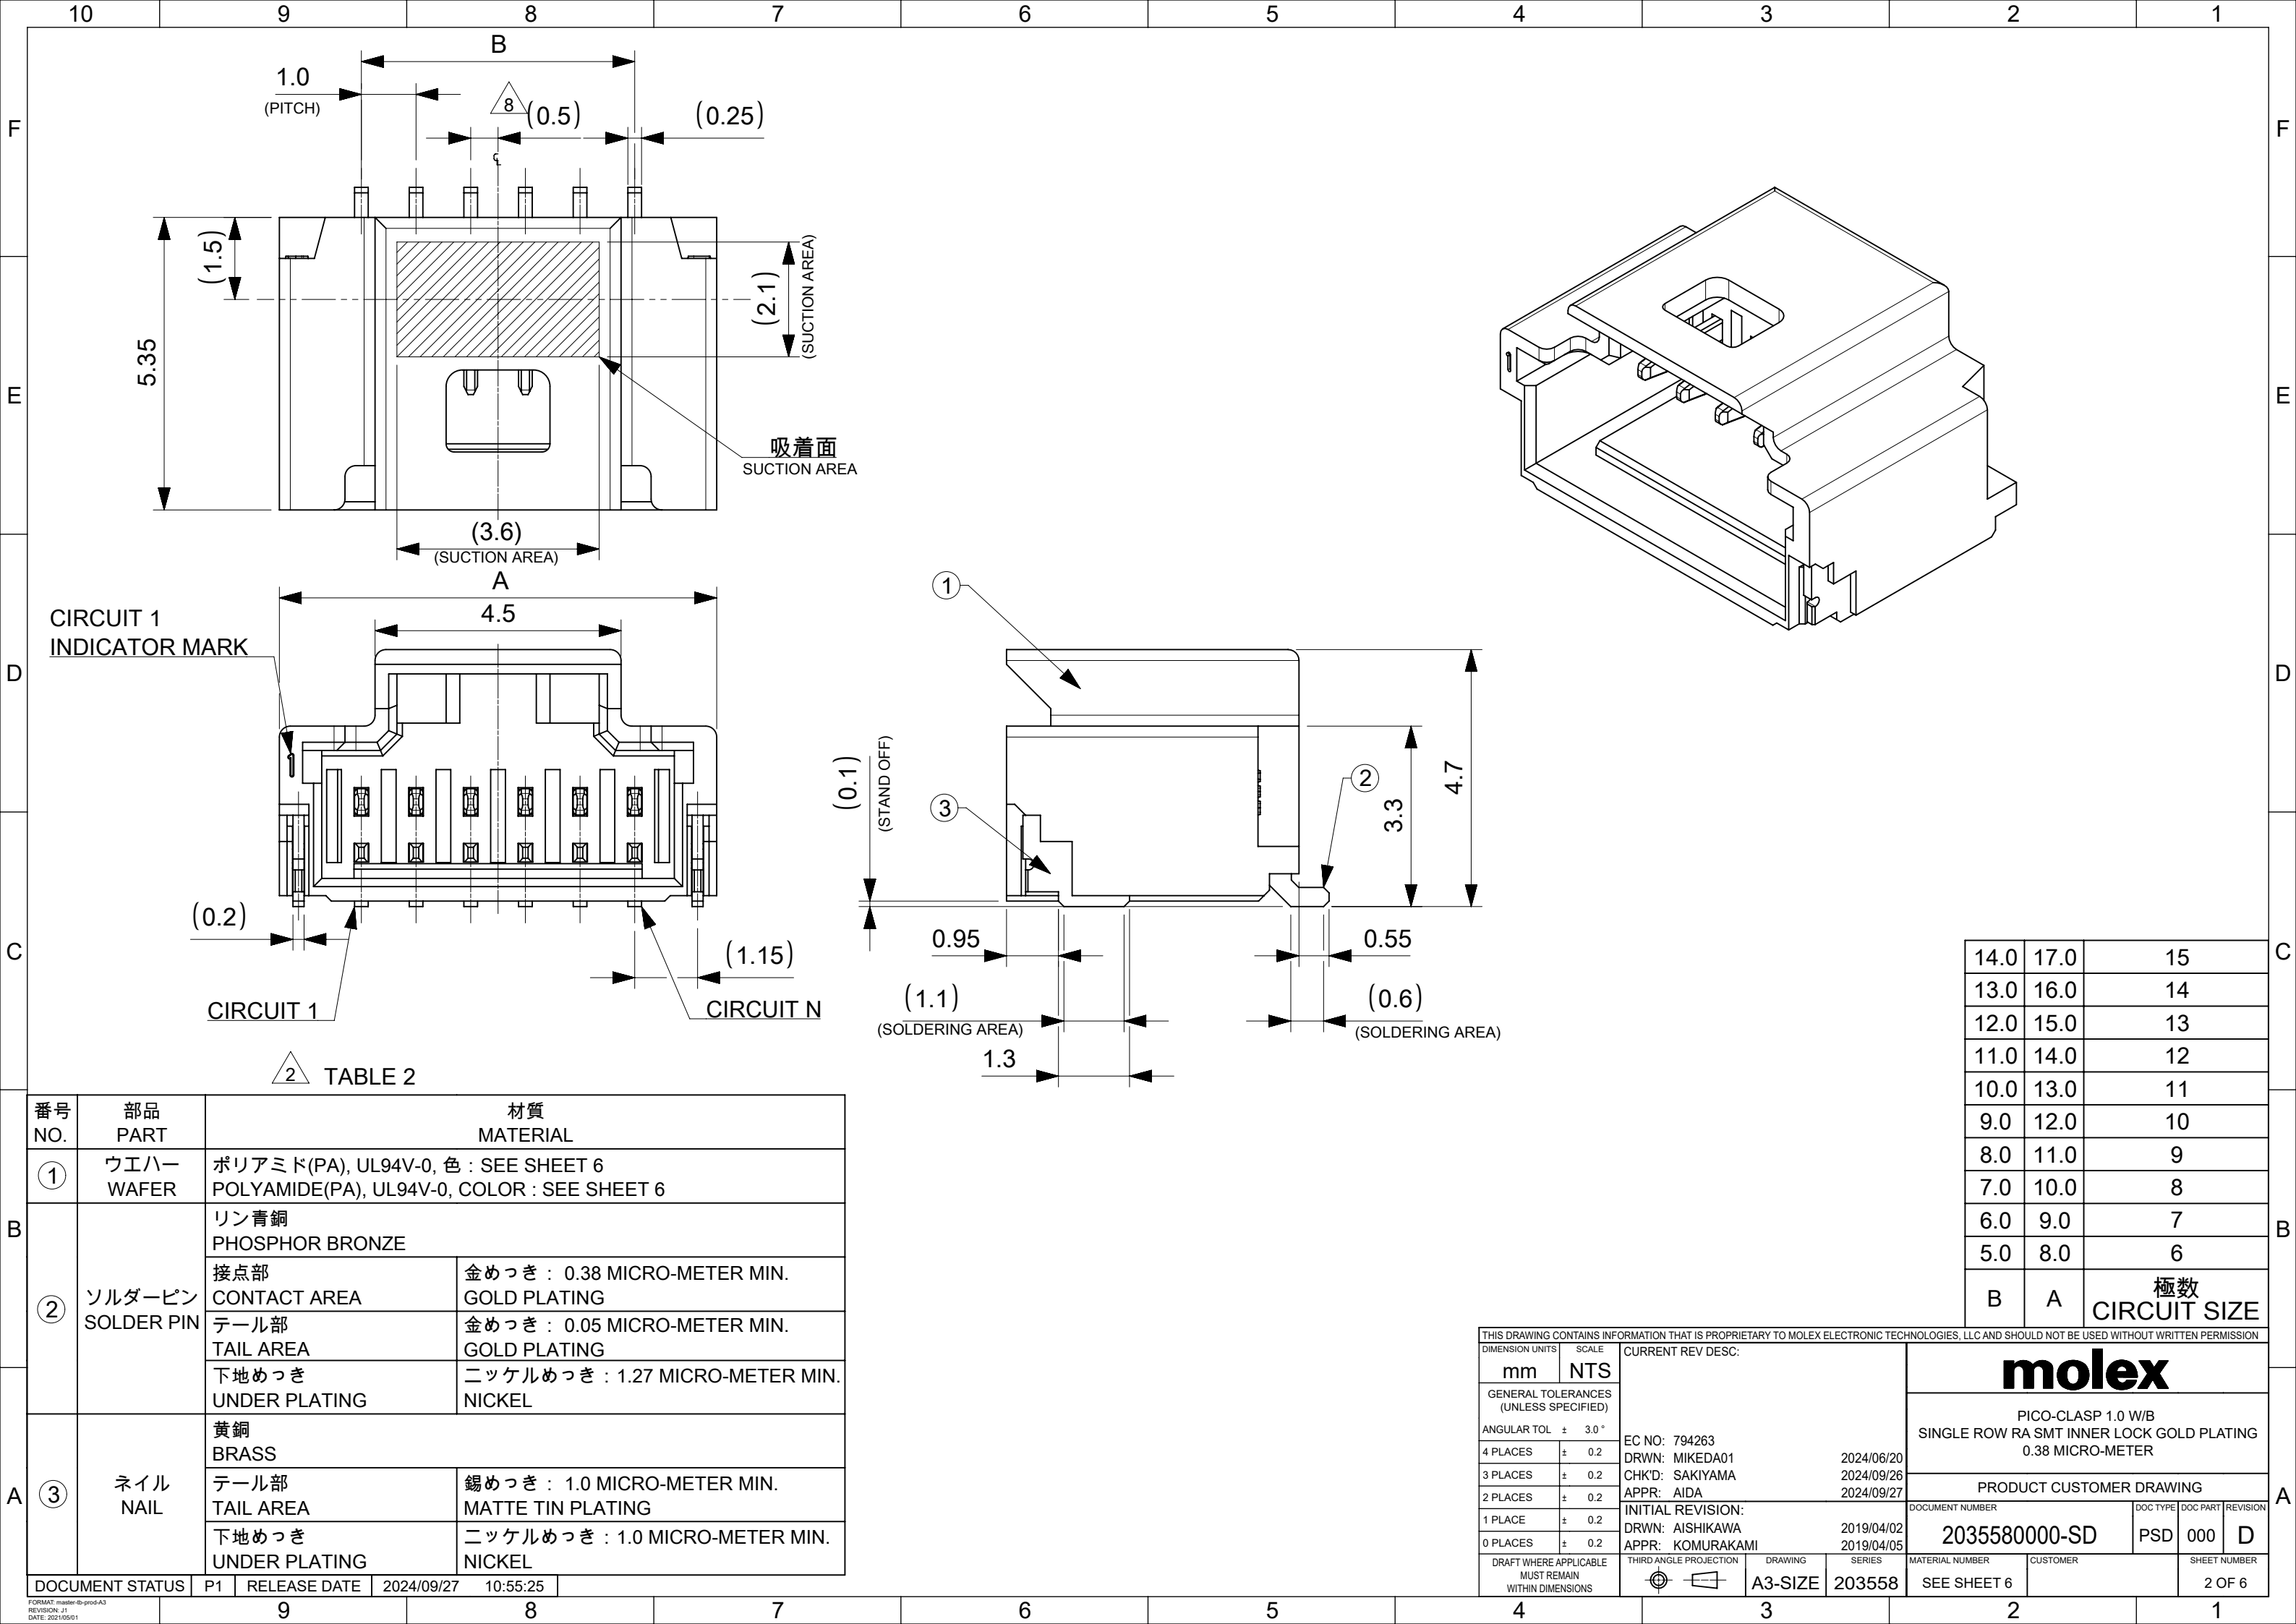

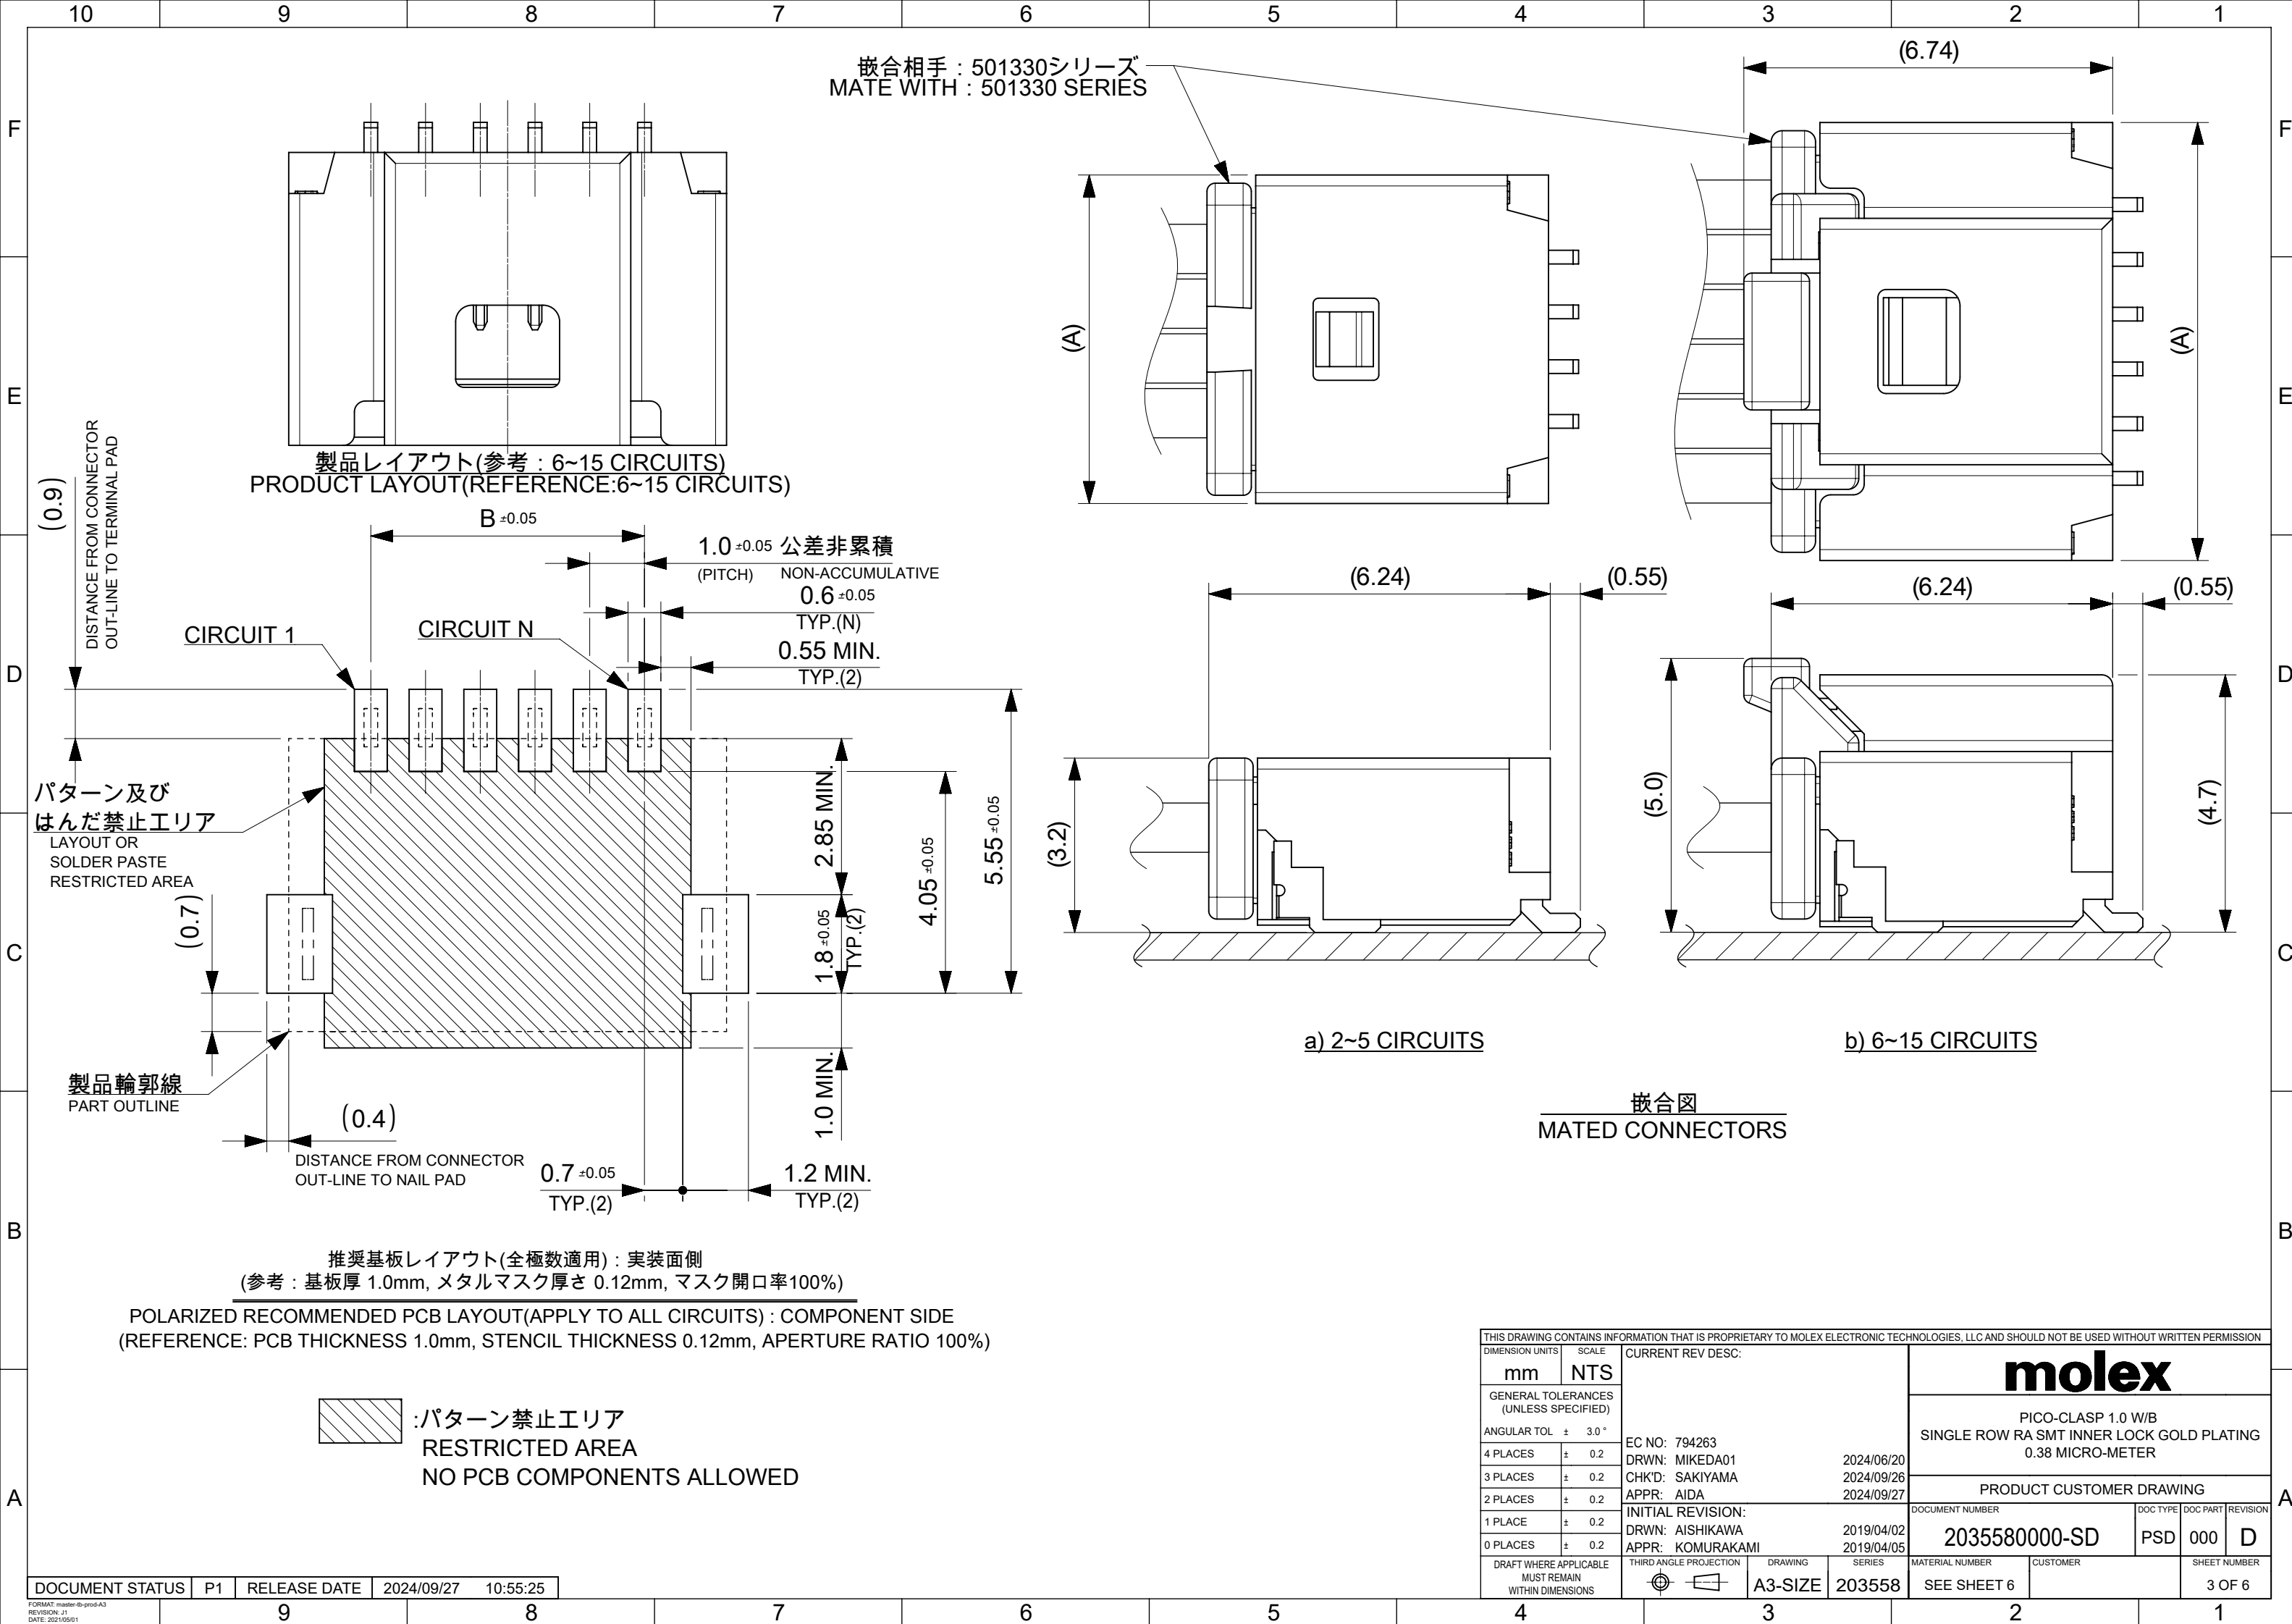


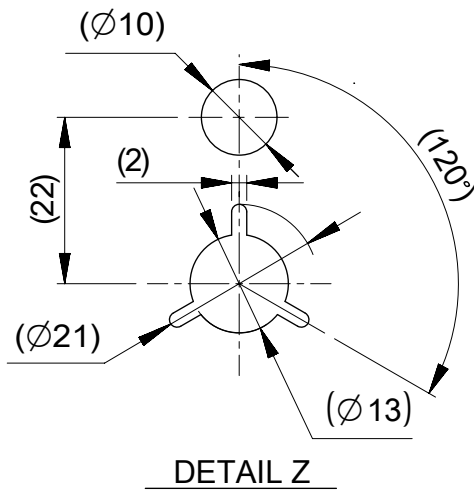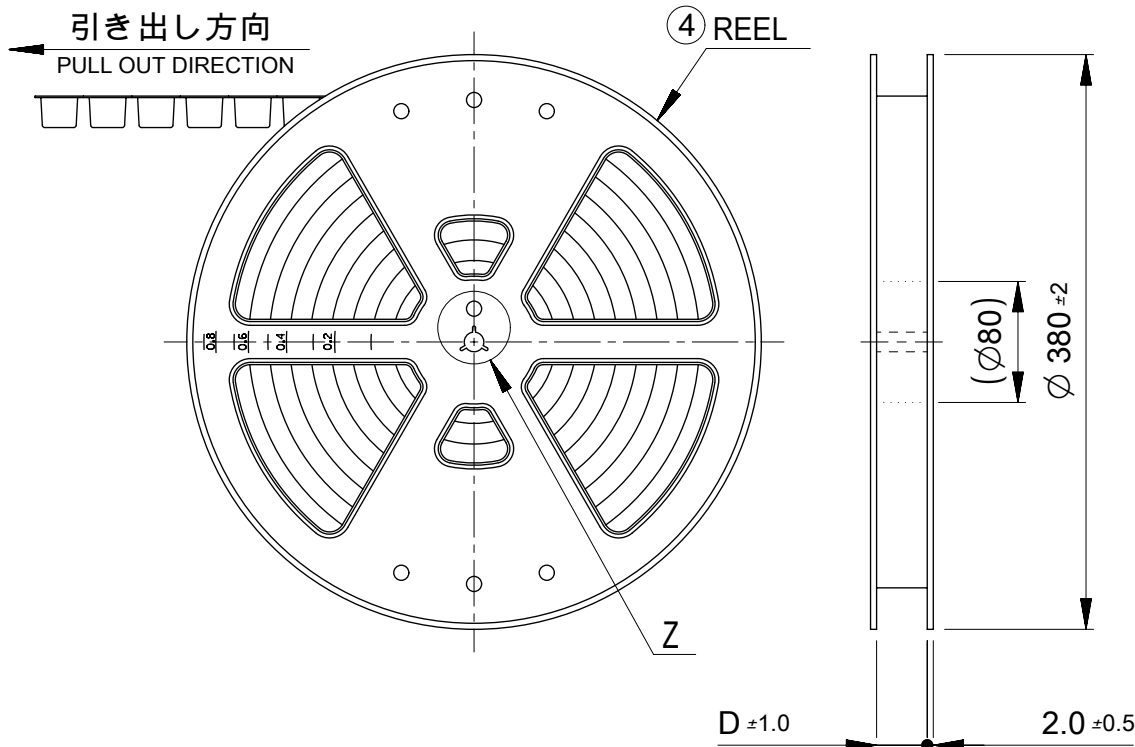

NOTES

10. 梱包数量
2-5 CIRCUIT: 1700個/リール
6-15 CIRCUIT: 1300個/リール
NUMBER OF CONNECTORS
2-5 CIRCUIT : 1700 PIECES/REEL
6-15 CIRCUIT : 1300 PIECES/REEL

11. リードテープ長さ
LEAD TAPE LENGTH

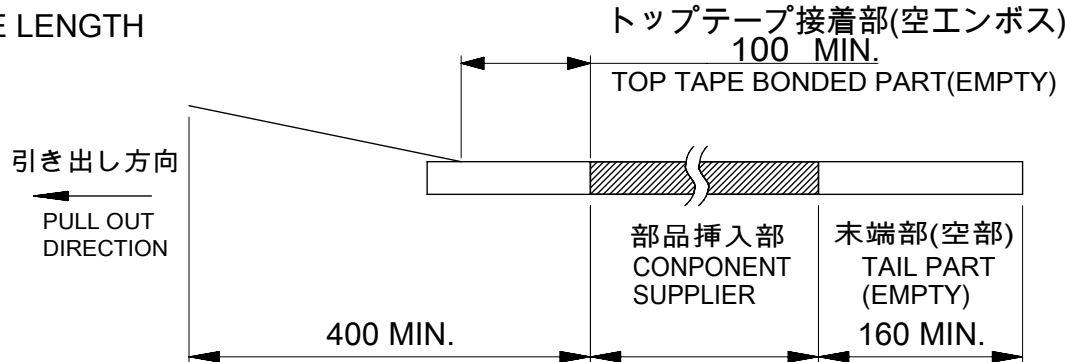


12. トップテープの剥離強度はIEC60286-3に準拠。
TOP TAPE PEELING FORCE IS DEFINED BY IEC60286-3.
13. 2~5極品は乾燥剤入り、ハイバリア梱包による納品となります。
2~5 CIRCUITS IS DELIVERED IN A HIGH BARRIER PACKAGING WITH DESICCANT.
14. 梱包仕様書 : 2035589200 PS 200
PACKAGE SPECIFICATION:
15. 発注番号 : SHEET 6 参照
ORDER No. : PLEASE REFER TO SHEET 6 FOR PRODUCT LIST.


203558 - ** * *

極数	ハウジングカラー	製品識別番号
CIRCUIT SIZE	HOUSING COLOR	IDENTIFICATION NUMBER
	0:NATURAL(BEIGE)	7:EMBOSSED PACKAGE

番号	部品	材質
NO.	PART	MATERIAL
④	リール	ポリスチレン(PS) <リサイクル材を含む>
	REEL	POLYSTYRENE(PS) <RECYCLE MATERIAL CONTAINED>

DOCUMENT STATUS	P1	RELEASE DATE	2024/09/27	10:55:25
-----------------	----	--------------	------------	----------

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION													
DIMENSION UNITS		SCALE		CURRENT REV DESC:									
mm		NTS											
GENERAL TOLERANCES (UNLESS SPECIFIED)				molex PICO-CLASP 1.0 W/B SINGLE ROW RA SMT INNER LOCK GOLD PLATING 0.38 MICRO-METER PRODUCT CUSTOMER DRAWING									
ANGULAR TOL ± 3.0 °													
4 PLACES		± 0.2											
3 PLACES		± 0.2											
2 PLACES		± 0.2											
1 PLACE		± 0.2											
0 PLACES		± 0.2											
EC NO: 794263 DRWN: MIKEDA01 2024/06/20 CHK'D: SAKIYAMA 2024/09/26 APPR: AIDA 2024/09/27				INITIAL REVISION:		DOCUMENT NUMBER		DOC TYPE	DOC PART	REVISION			
				DRWN: AISHIKAWA 2019/04/02 APPR: KOMURAKAMI 2019/04/05		2035580000-SD		PSD	000	D			
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION		DRAWING		SERIES		MATERIAL NUMBER		CUSTOMER		SHEET NUMBER	
				A3-SIZE		203558		SEE SHEET 6				4 OF 6	

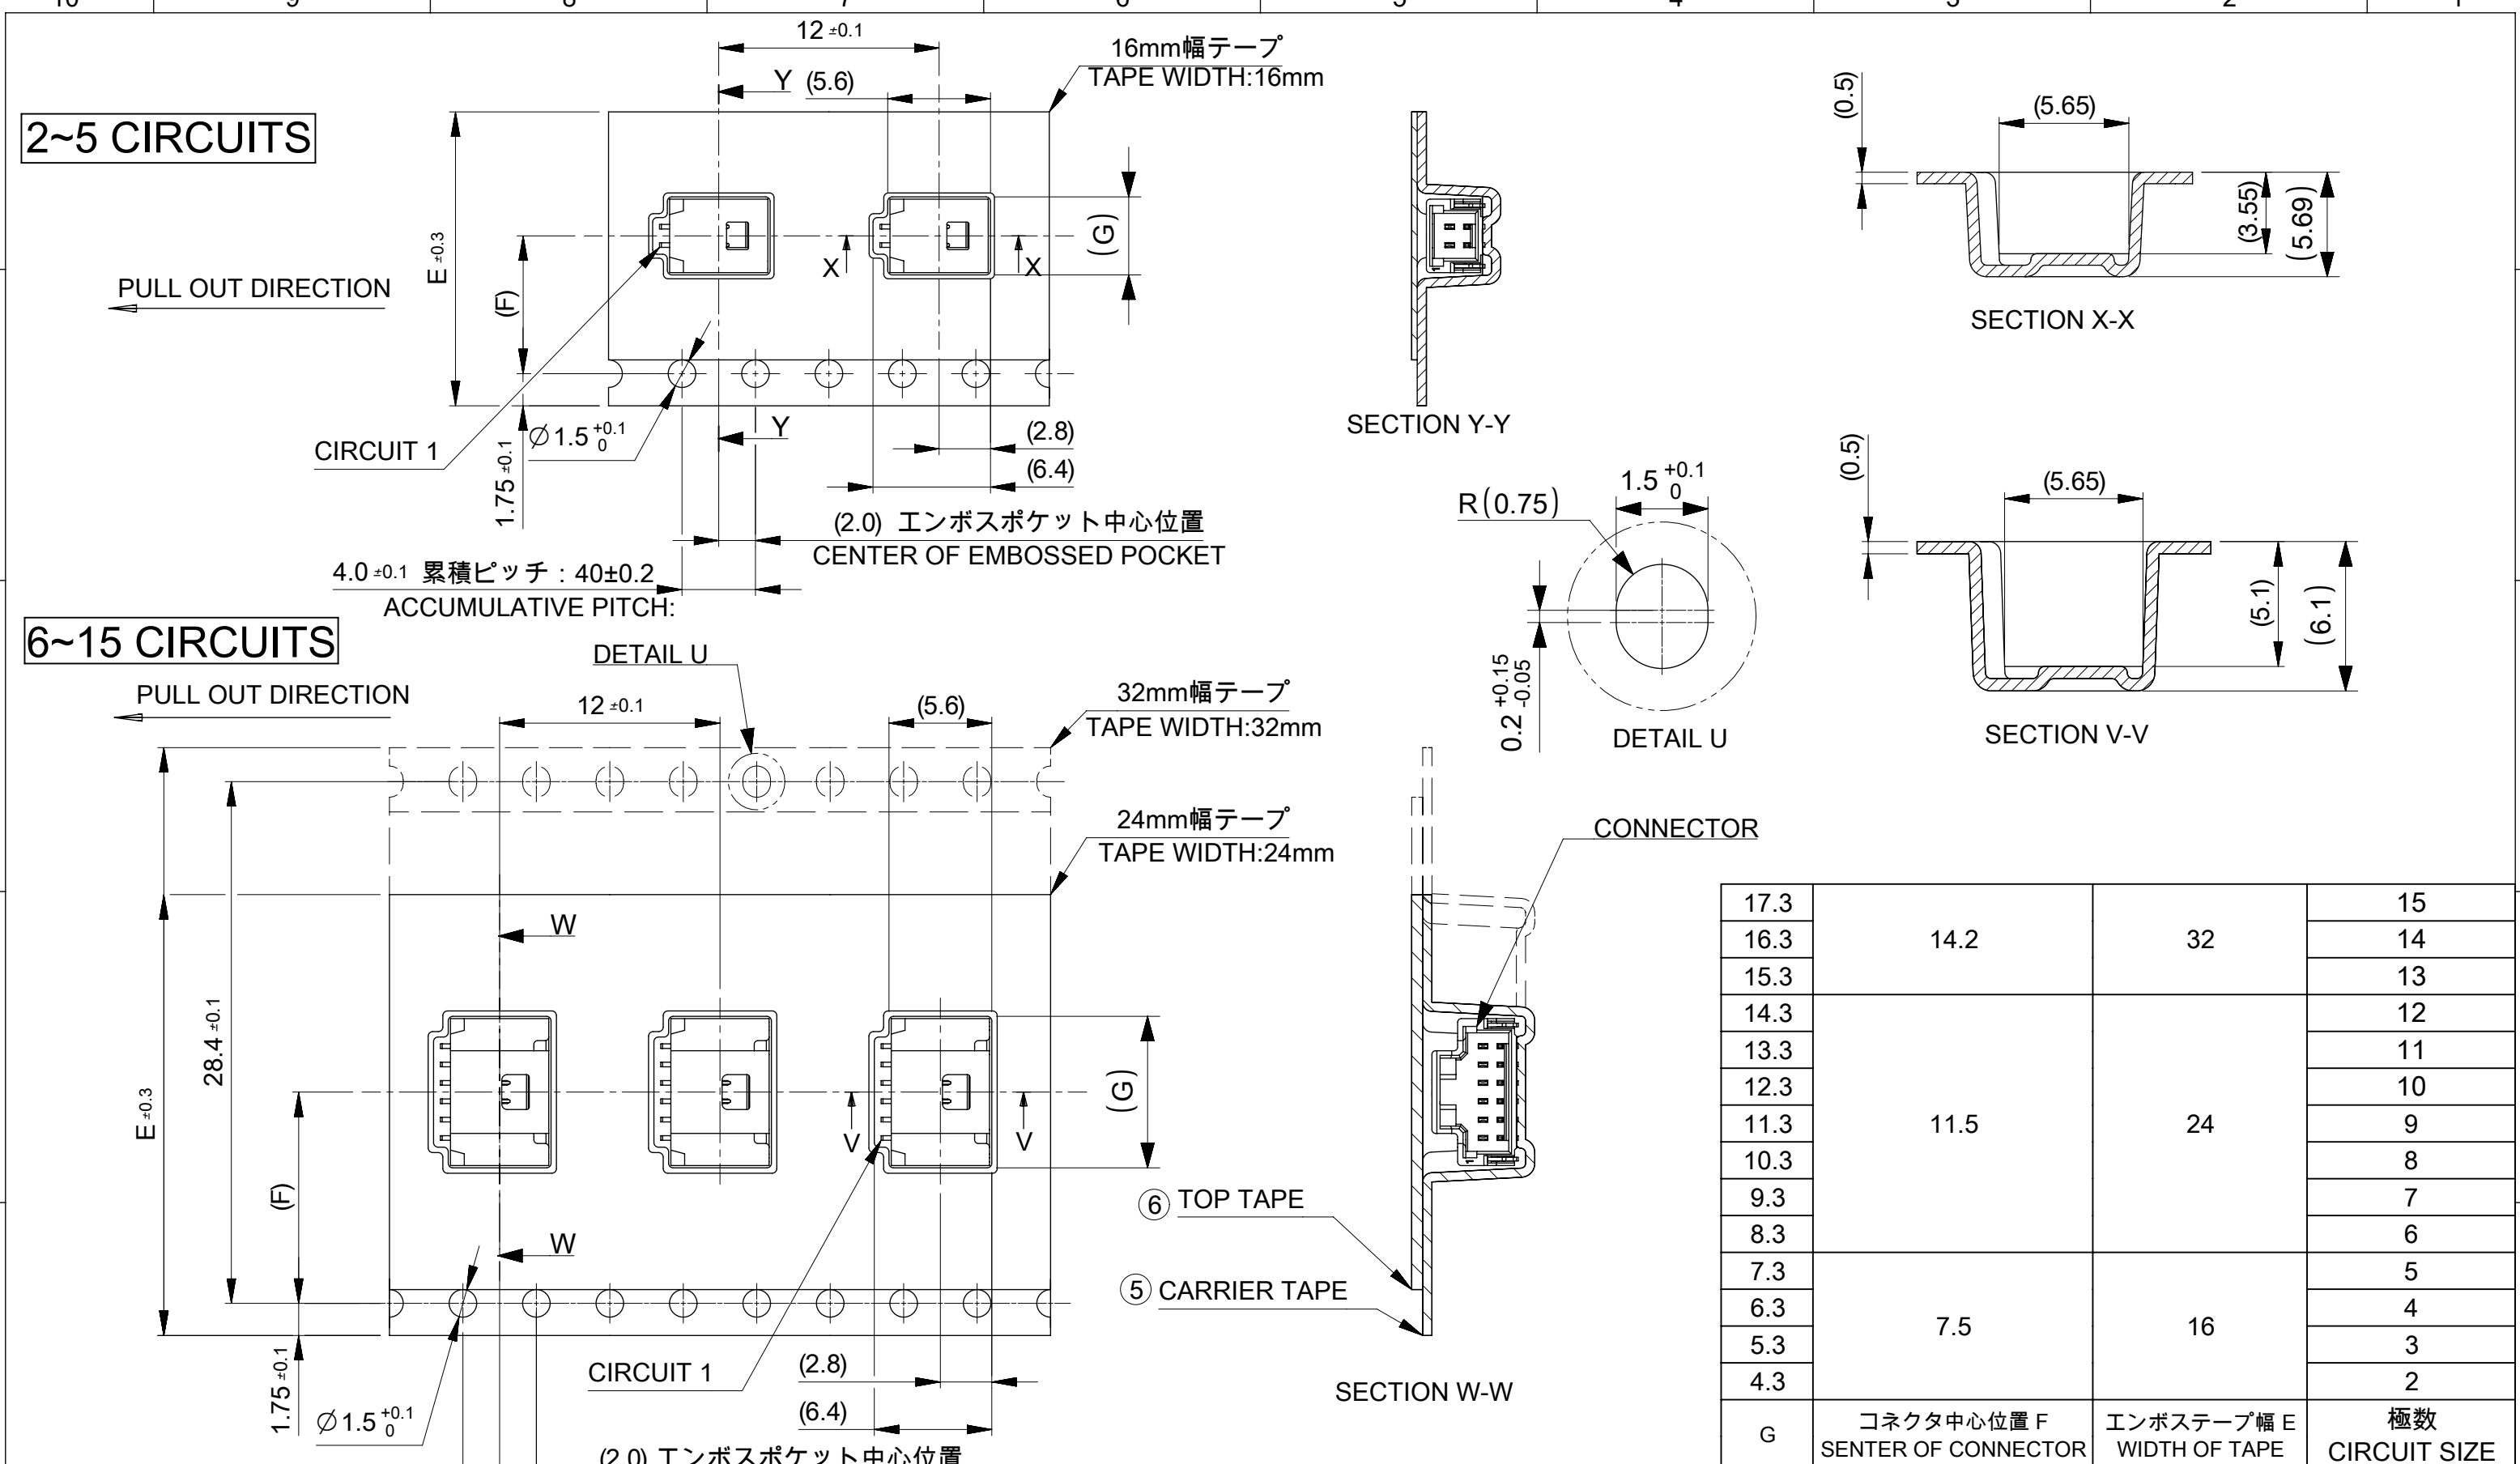

17.3	14.2	32	15
16.3			14
15.3			13
14.3	11.5	24	12
13.3			11
12.3			10
11.3			9
10.3			8
9.3	7.5	16	7
8.3			6
7.3			5
6.3			4
5.3			3
4.3			2
G	コネクタ中心位置 F SENER OF CONNECTOR	エンボステープ幅 E WIDTH OF TAPE	極数 CIRCUIT SIZE

番号 NO.	部品 PART	材質 MATERIAL
⑤	キャリアテープ CARRIER TAPE	ポリプロピレン(PP)、その他 POLYPROPYLENE(PP), etc
⑥	トップテープ TOP TAPE	ポリエチレン(PE)、その他 POLYETHYLENE(PE), etc

DOCUMENT STATUS	P1	RELEASE DATE	2024/09/27	10:55:25
-----------------	----	--------------	------------	----------

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION											
DIMENSION UNITS		SCALE		CURRENT REV DESC: EC NO: 794263 DRWN: MIKEDA01 CHK'D: SAKIYAMA APPR: AIDA INITIAL REVISION: DRWN: AISHIKAWA APPR: KOMURAKAMI THIRD ANGLE PROJECTION  			molex				
mm		NTS									
GENERAL TOLERANCES (UNLESS SPECIFIED)							PICO-CLASP 1.0 W/B SINGLE ROW RA SMT INNER LOCK GOLD PLATING 0.38 MICRO-METER				
ANGULAR TOL ± 3.0 °							PRODUCT CUSTOMER DRAWING				
4 PLACES		± 0.2					2024/06/20			DOCUMENT NUMBER 2035580000-SD	
3 PLACES		± 0.2		2024/09/26			DOC TYPE PSD				
2 PLACES		± 0.2		2024/09/27			DOC PART 000				
1 PLACE		± 0.2		2019/04/02			REVISION D				
0 PLACES		± 0.2		2019/04/05							
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				DRAWING A3-SIZE		SERIES 203558		MATERIAL NUMBER SEE SHEET 6		CUSTOMER SHEET NUMBER 5 OF 6	

