


Connector Location A

Connector Location B

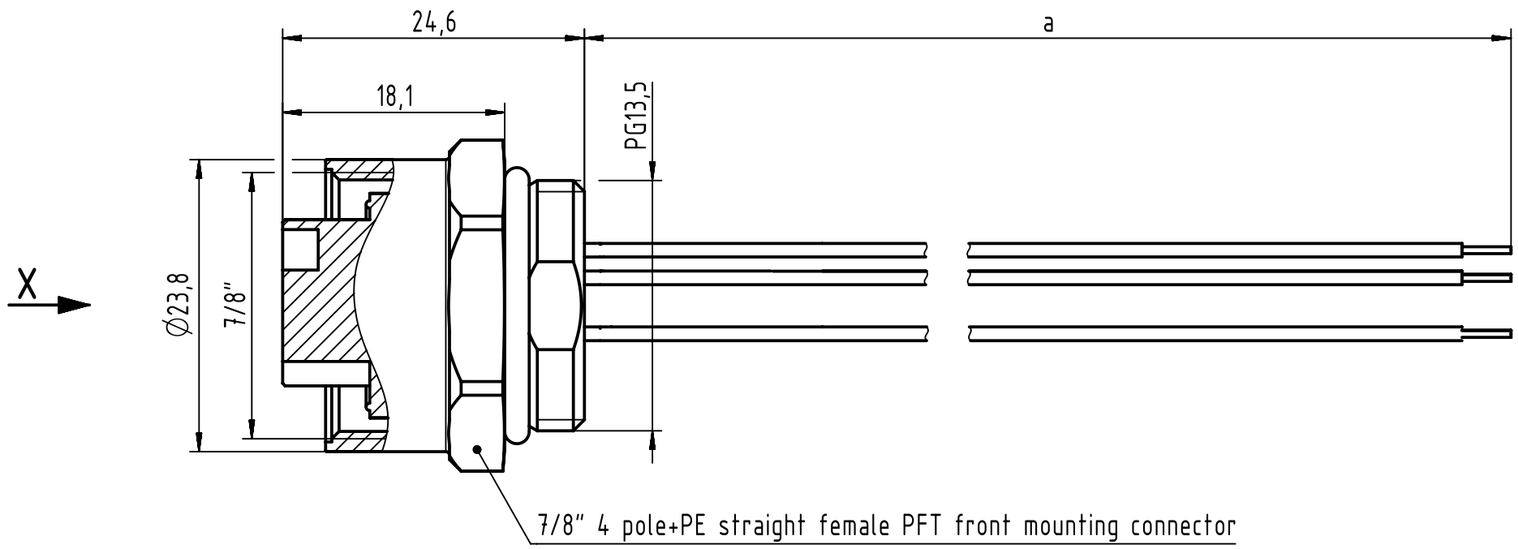

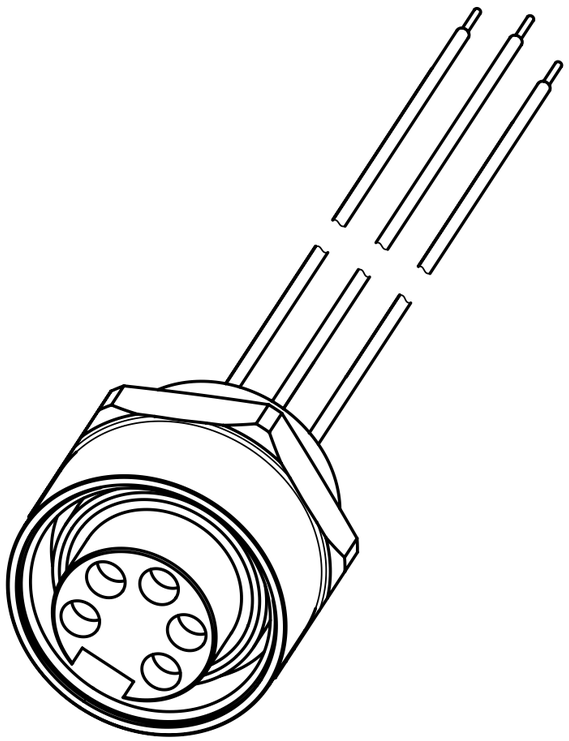


X

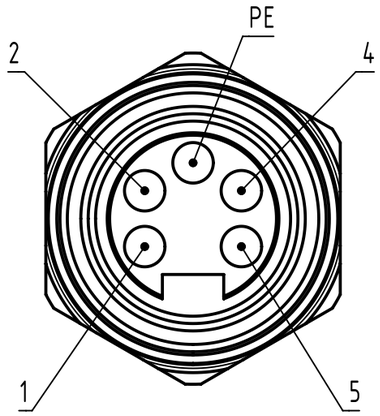

Loading plan:

1	black
2	blue
PE	green-yellow
4	brown
5	white

Recommended panel cut-out

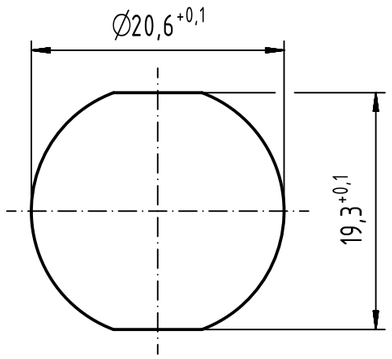

Minimum wall thickness 2.5mm

- Protection level: IP 65/67
- Temperature range: -30°C...+75°C

Cont. No.	Part - no.	Type of cable	Dim. a[m]
1	21043162501	AWG 18, PVC	0.5

All Dimensions in mm	Tech. Character.	Free size tol.	According to production drawing 2016-09-05		
All rights reserved	Created by MUNTEANV	Inspected by POPESCUD	Standardisation AVRAM	Date 2016-10-18	State Final Release
Department HCS - RO	Title 7/8" Cable Assembly				Doc-Key / ECM-Nr. 100587940/UGD/000/B 500000110271
HARTING Customised Solutions D-32427 Minden	Type TB	Number 210431625XX		Rev. B	Page 1/1

A3