

6		5		4	
ITEM	PART#	DESCRIPTION		QTY	UOM
A	22013107	100 KK Term Hsg W/LRamp W/PoR 10Ckt		1	PC
B	8500113	KK 100 Crp Term Std 22-30 Awg Tin		10	PC
C	--	PAPER PRINTED PAPER WHITE		1	PC

2		1	
FROM	TO	DESCRIPTION	COLOR
A1	--	1X22AWG DISC MPPE BK UL11028	BLACK
A2	--	1X22AWG DISC MPPE BK UL11028	BLACK
A3	--	1X22AWG DISC MPPE BK UL11028	BLACK
A4	--	1X22AWG DISC MPPE BK UL11028	BLACK
A5	--	1X22AWG DISC MPPE BK UL11028	BLACK
A6	--	1X22AWG DISC MPPE BK UL11028	BLACK
A7	--	1X22AWG DISC MPPE BK UL11028	BLACK
A8	--	1X22AWG DISC MPPE BK UL11028	BLACK
A9	--	1X22AWG DISC MPPE BK UL11028	BLACK
A10	--	1X22AWG DISC MPPE BK UL11028	BLACK

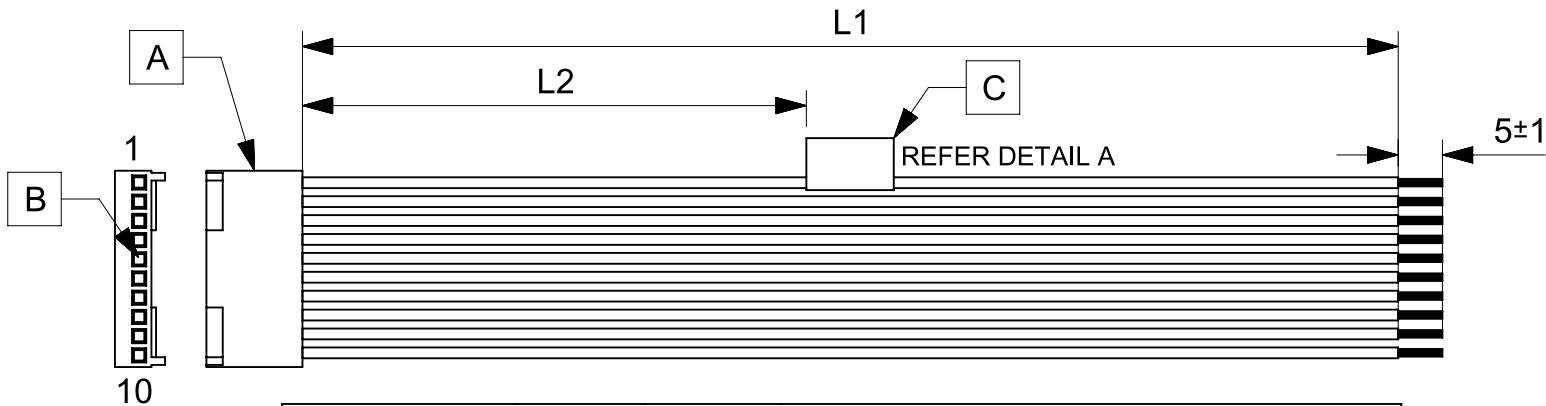


TABLE			
PART NUMBER	L1	L2	TITLE
2177971101	150±8	63 REF	KK 2.54 SR R-S 10CKT 150MM DISC Sn
2177971102	300±10	138 REF	KK 2.54 SR R-S 10CKT 300MM DISC Sn
2177971103	600±10	288 REF	KK 2.54 SR R-S 10CKT 600MM DISC Sn

- NOTES
- Connector view shown is from mating side.
 - Free ends must be stripped, twisted & tinned. The length of tinning is 5±1mm. Tinning dia must be 0.9mm Max.
 - Label text must be 2mm max. in height with Arial font.
 - Label must be wrapped in Flag type on a single cable.

MOLEX P/N
MOLEX
BATCH WK/YR

DETAIL A

REVISION			
DATE	REV	DESCRIPTION	CHANGER
11/01/2021	A	INITIAL RELEASE	ARAJU

FUNCTIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		CURRENT REV DESC:		molex			
	DIMENSION UNITS	SCALE			SEE TABLE			
DIVISIONAL SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)							
	ANGULAR TOL	± °						
	4 PLACES	±						
	3 PLACES	±						
	2 PLACES	±						
	1 PLACE	±						
	0 PLACES	±						
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	THIRD ANGLE PROJECTION	DRAWING	SERIES	MATERIAL NUMBER	CUSTOMER	SHEET NUMBER
				A4-SIZE	217797	SEE TABLE	GENERAL MARKET	1 OF 1

DOCUMENT STATUS	P1	RELEASE DATE	2021/01/11	10:46:56
-----------------	----	--------------	------------	----------