
ITEM	PART#	DESCRIPTION	QTY	UOM
A,B	901420008	CGrid Crp Conn Hsg DR FL Polz 8Ckt	2	PC
C	901190109	CGrid Term Fem Crp LFH SnA 2224AWG	16	PC
D	--	PAPER PRINTED PAPER WHITE	1	PC

FROM	TO	DESCRIPTION	COLOR
A1	B7	1X22AWG DISC MPPE BK UL11028	BLACK
A2	B8	1X22AWG DISC MPPE BK UL11028	BLACK
A3	B5	1X22AWG DISC MPPE BK UL11028	BLACK
A4	B6	1X22AWG DISC MPPE BK UL11028	BLACK
A5	B3	1X22AWG DISC MPPE BK UL11028	BLACK
A6	B4	1X22AWG DISC MPPE BK UL11028	BLACK
A7	B1	1X22AWG DISC MPPE BK UL11028	BLACK
A8	B2	1X22AWG DISC MPPE BK UL11028	BLACK

MOLEX P/N
MOLEX
BATCH WK/YR

DETAIL A

TABLE			
PART NUMBER	L1	L2 (REF)	TITLE
2196581082	150±8	15	CGRID III R-R 8ckt 150mm disc Sn
2196581083	300±10	15	CGRID III R-R 8ckt 300mm disc Sn
2196581084	600±10	15	CGRID III R-R 8ckt 600mm disc Sn

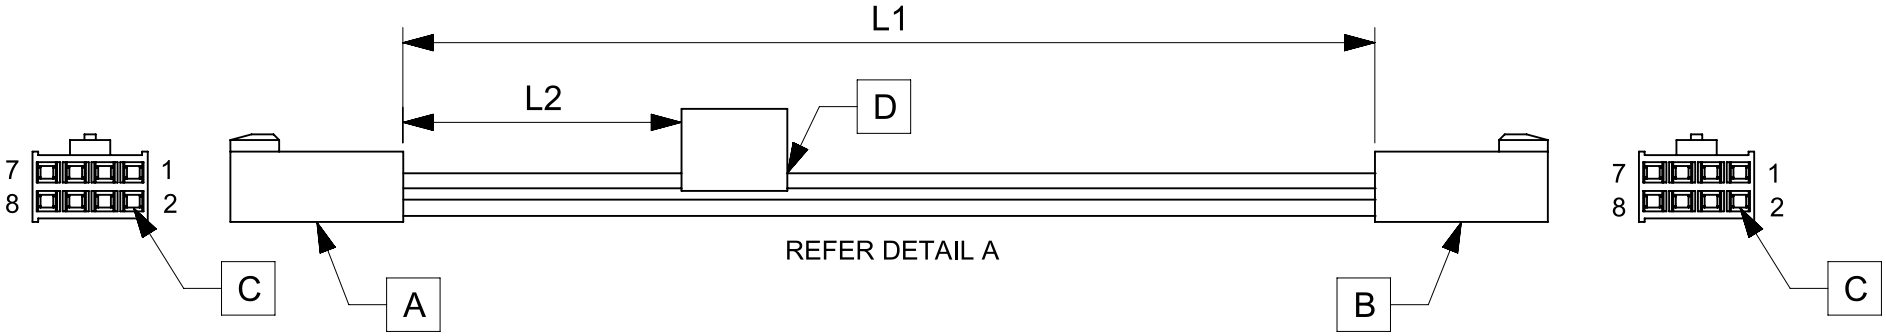

NOTES
1. Cable assembly must pass 100% continuity and polarity test.
2. Connector view shown is from mating side.
3. Label text must be 2mm max. in height with Arial font.
4. Label must be wrapped in Flag type on a single cable.

REVISION			
DATE	REV	DESCRIPTION	CHANGER
2021/12/27	A	INITIAL RELEASE	SAIKIG
DOCUMENT STATUS	P1	RELEASE DATE	2022/01/13 11:15:18

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

FUNCTIONAL SYMBOLS
FA = 0
FC = 0
FD = 0
DIVISIONAL SYMBOLS

DIMENSION UNITS: mm
SCALE: NTS
GENERAL TOLERANCES (UNLESS SPECIFIED)
ANGULAR TOL ± °
4 PLACES ±
3 PLACES ±
2 PLACES ±
1 PLACE ±
0 PLACES ±
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

CURRENT REV DESC:

EC NO: 690898
DRWN: SAIKIG 2021/12/27
CHK'D: MNARAYAN01 2022/01/13
APPR: MNARAYAN01 2022/01/13

INITIAL REVISION:
DRWN: SAIKIG 2021/12/27
APPR: MNARAYAN01 2022/01/13

THIRD ANGLE PROJECTION
DRAWING: A4-SIZE
SERIES: 219658

molex

SEE TABLE

PRODUCT CUSTOMER DRAWING

DOCUMENT NUMBER	DOC TYPE	DOC PART	REVISION
2196581082	PSD	000	A

MATERIAL NUMBER	CUSTOMER	SHEET NUMBER
SEE TABLE	GENERAL MARKET	1 OF 1

FORMAT: master-tb-prod-A4
REVISION: J
DATE: 2020/01/14