


6		5		4		3		2		1	
ITEM	PART#	DESCRIPTION		QTY	UOM						
A	5024391000	2.0 W/B Single Plug Hsg 10Ckt		1	PC						
B	5024380000	2.0 W/B Single Plug Term W/Plt Chain		10	PC						
C	---	WHITE PART ID LABEL		1	PC						

FROM	TO	DESCRIPTION	COLOUR
A1	--	1X22AWG DISC SR-PVC BK UL10002	BLACK
A2	--	1X22AWG DISC SR-PVC BK UL10002	BLACK
A3	--	1X22AWG DISC SR-PVC BK UL10002	BLACK
A4	--	1X22AWG DISC SR-PVC BK UL10002	BLACK
A5	--	1X22AWG DISC SR-PVC BK UL10002	BLACK
A6	--	1X22AWG DISC SR-PVC BK UL10002	BLACK
A7	--	1X22AWG DISC SR-PVC BK UL10002	BLACK
A8	--	1X22AWG DISC SR-PVC BK UL10002	BLACK
A9	--	1X22AWG DISC SR-PVC BK UL10002	BLACK
A10	--	1X22AWG DISC SR-PVC BK UL10002	BLACK

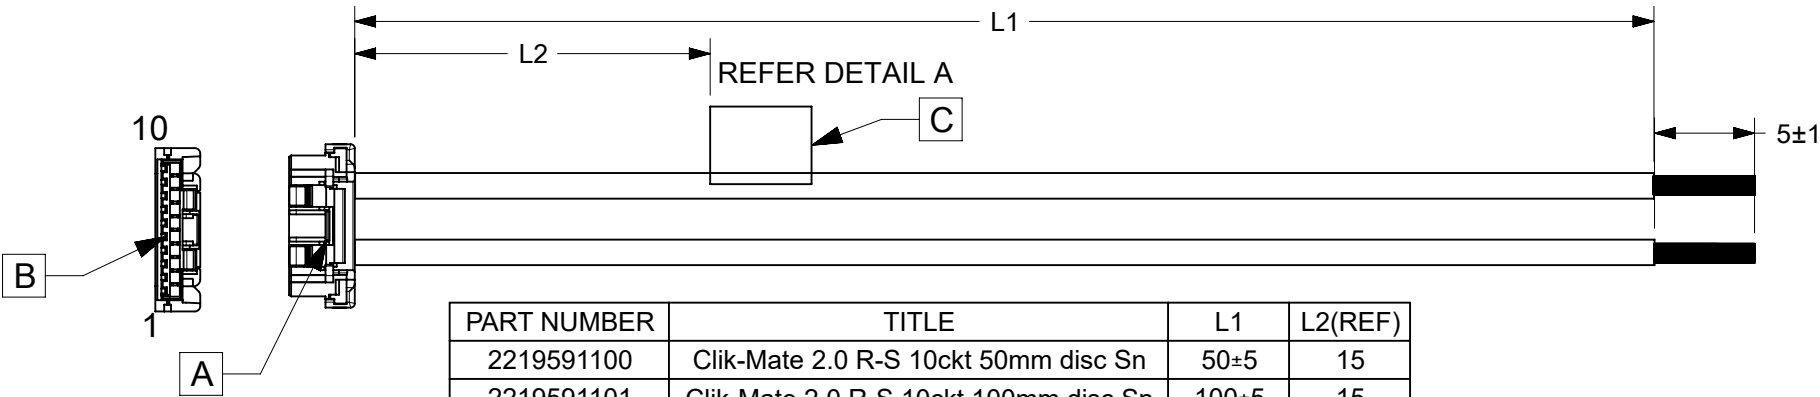

MOLEX P/N
MOLEX
BATCH WK/YR
DETAIL A

- NOTES
- CABLE ASSEMBLY TO BE TESTED 100% FOR CONTINUITY AND POLARITY.
 - CONNECTOR VIEW SHOWN IS FROM MATING SIDE.
 - LABEL TEXT MUST BE 2 MM MAX. IN HEIGHT WITH ARIAL FONT.
 - LABEL MUST BE WRAPPED IN FLAG TYPE ON A SINGLE CABLE.
 - TINNING SHOULD BE DONE WITH LEAD FREE SOLDER BAR ONLY.
 - FREE ENDS MUST BE STRIPPED, TWISTED & TINNED.
THE LENGTH OF TINNING IS 5±1 MM. TINNING DIA MUST BE 0.9MM MAX.

REVISION			
DATE	REV	DESCRIPTION	CHANGER
2022/02/12	A	INITIAL RELEASE	THANUB
DOCUMENT STATUS	P1	RELEASE DATE	2022/12/23 12:42:19

FUNCTIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			
	DIMENSION UNITS	SCALE	CURRENT REV DESC:	
	mm	NTS		
	GENERAL TOLERANCES (UNLESS SPECIFIED)			
DIVISIONAL SYMBOLS	ANGULAR TOL ± °			
	4 PLACES	±		
	3 PLACES	±		
	2 PLACES	±		
	1 PLACE	±		
	0 PLACES	±		
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			
	THIRD ANGLE PROJECTION		DRAWING	SERIES
			A4-SIZE	221959
			MATERIAL NUMBER	CUSTOMER
			SEE TABLE	GENERAL MARKET
			SHEET NUMBER	1 OF 1