





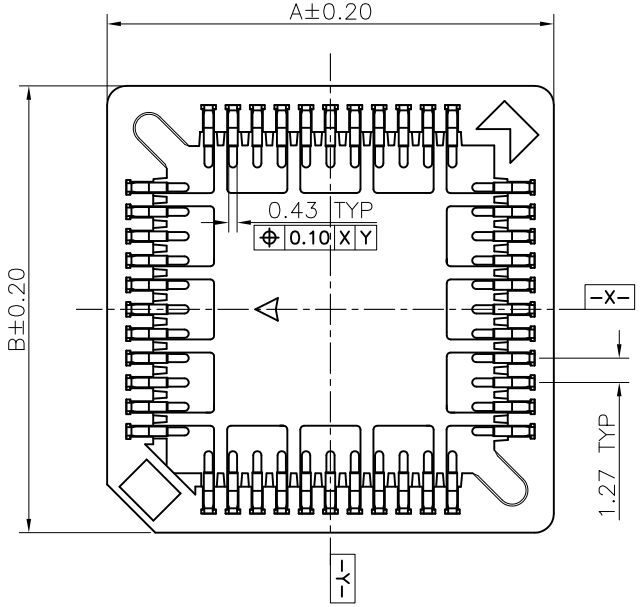

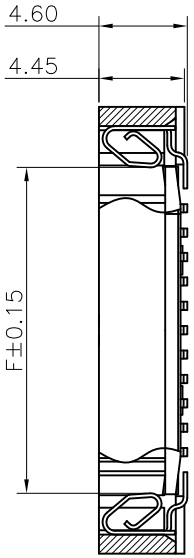

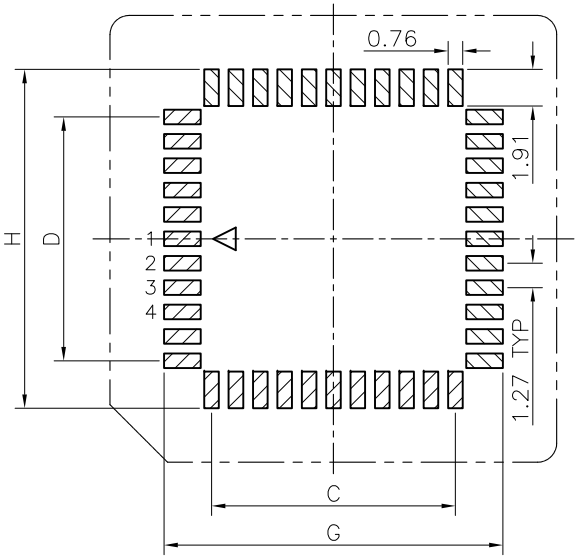

RECOMMENDED P.C BOARD LAYOUT

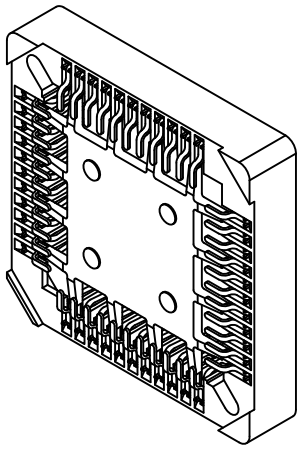

NOTES:
SPECIFICATIONS:
CURRENT RATING:1 AMP.
VOLTAGE:250V AC/DC MAX.
DIELECTRIC WITHSTANDING:500VAC FOR ONE MINUTE.
CONTACT RESISTANCE:30mΩ (MAX).
INSULATION RESISTANCE:1000MΩ (MIN).
OPERATING TEMPERATURE:−55℃+105℃.
RETENTION FORCE:0.30KG PER PIN (MIN).
MATERIALS:
INSULATOR: PPS +30%GF UL 94V−0.
CONTACTS:PHOSOR BRONZE.
CONTACT PLATING TIN.

Dimension (mm) / No. OF Pin	A	B	C	D	E	F	G	H
SMT−20P	15.65	15.65	5.08	5.08	9.35	9.35	10.03	10.03
SMT−28P	18.19	18.19	7.62	7.62	11.89	11.89	12.57	12.57
SMT−32P	20.65	18.15	10.16	7.62	14.35	11.85	13.56	12.80
SMT−44P	23.27	23.27	12.70	12.70	16.97	16.97	17.65	17.65
SMT−52P	25.81	25.81	15.24	15.24	19.51	19.51	20.19	20.19
SMT−68P	30.89	30.89	20.32	20.32	24.59	24.59	25.27	25.27
SMT−84P	35.97	35.97	25.40	25.40	29.67	29.67	30.35	30.35

DATE	DR.BY	ECN.NO.	DESCRIPTION	MARK	VER.
10/09/06	ING		NEW DWG		A0

-TOLERANCES-
UNLESS OTHERWISE SPECIFIED
公差參考表

X.X ±0.30	X.X° ±3.00°	APPD:	
X.XX ±0.20	X.XX° ±1.00°	CHECK:	
X.XXX ±0.10	X.XXX° ±0.05°	DRAW:	

CnC Tech,LLC

TITLE: PLCC 0.20 SMT 成品

PRODUCT NO: 232-XX

DATE	SCALE	UNIT	TYPE	PAGE
2010.09.06	1:1	mm	Z	1 / 1