


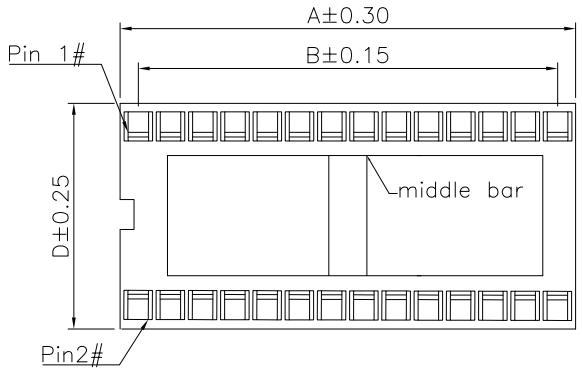


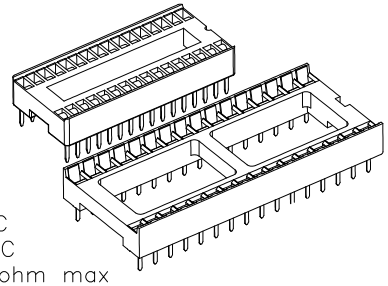

Specifications:
Current Rating:1.0A AC,DC
Voltage Rating:250V AC,DC
Contact Resistance:15m ohm max
Insulator Resistance:5000M ohm min
Dielectric Withstanding voltage:1000V AC/minute
Operating Temperature:−40°C to +105°C
Material:
Insulator:High Temp. Plastic (PBT UL 94V−0)
Standard Color:Black
Contacts:Phosphor Bronze
Finish:Tin Plated

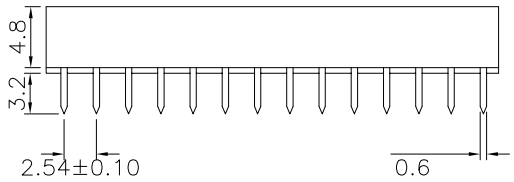




Note1: W/O middle bar(6~20P)
With middle bar(22~40P)

Dimension:

Patr No.	Circuits	Dim.A	Dim.B	Dim.C	Dim.D	Patr No.	Circuits	Dim.A	Dim.B	Dim.C	Dim.D
243-06-1-03	06	7.62	5.08	7.62	10.16	243-22-1-04	22	27.94	25.40	10.16	12.70
243-08-1-03	08	10.16	7.62	7.62	10.16	243-24-1-06	24	30.48	27.94	15.24	17.78
243-14-1-03	14	17.78	15.24	7.62	10.16	243-28-1-06	28	35.56	33.02	15.24	17.78
243-16-1-03	16	20.32	17.78	7.62	10.16	243-32-1-06	32	40.64	38.10	15.24	17.78
243-18-1-03	18	22.86	20.32	7.62	10.16	243-40-1-06	40	50.80	48.26	15.24	17.78
243-20-1-03	20	25.40	22.86	7.62	10.16						

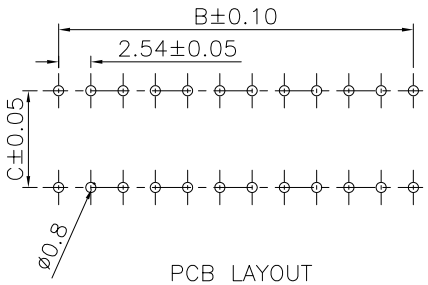

PCB LAYOUT

RoHS Compliant

REV	DATE	FILE	BY
	05-FEB-2020		

DRAWN: Jerry Chen
CHECKED:
APPROVAL: Rory Chen

GENERAL TOLERANCE:
.X=±0.20
.XX=±0.15

UNIT: MM
SCALE:1:1
SHEET: 1 / 1
PROJECTION:

CnC Tech
Industrial Cable and Connector Technology

DESCRIPTION: 2.54mm IC Socket Stamp Pin
PART NO: 243-XX-1-XX
SIZE: A4