
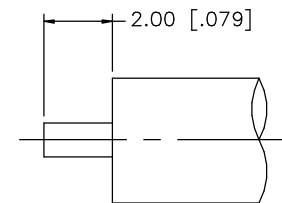



REV.	DATE	DESCRIPTION
NC	06/10/03	INITIAL RELEASE

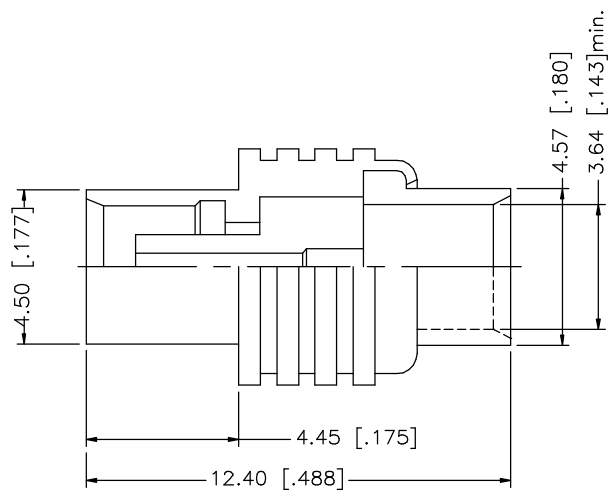

RECOMMENDED CABLE STRIPPING DIMENSIONS

NOTE:
1. CONTACT PIN TO SOLDER

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007" .315 – 1.180 = ± 0.015" 1.180 – 4.724 = ± 0.020" DO NOT SCALE DRAWING	APPROVALS	DATE	Amphenol Connex PART DESCRIPTION MCX DIRECT SOLDER JACK (.141” SEMI RIGID CABLE) PART NO. 252184 DWG. NO.252184.DWG REV. NC SIZE A SCALE NA								
8						DRAWN	G.R.S.						06/10/03			
7						CHECKED										
6						ISSUED										
5						SHEET	1 OF 1									
4																
3	CONTACT PIN	BER. COPPER	GOLD	1												
2	INSULATOR	TEFLON	NATURAL	1												
1	BODY	BRASS	GOLD	1												
	DESCRIPTION	MATERIAL	FINISH	QTY			CAD FILE	C:/252/252184.DWG	DWG. NO.	252184.DWG	REV.	NC	SIZE	A	SCALE	NA