


APPROVED: _____


DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	4/13/06	
A		PART REVISION	4/19/06	
B		ADDED DIM.	3/18/15	AY/RT
C		UPDATE DRAWING	4/13/18	AY/MY

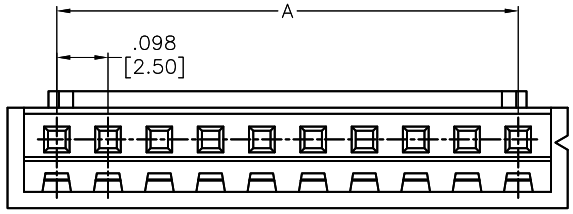

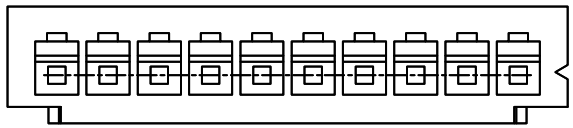

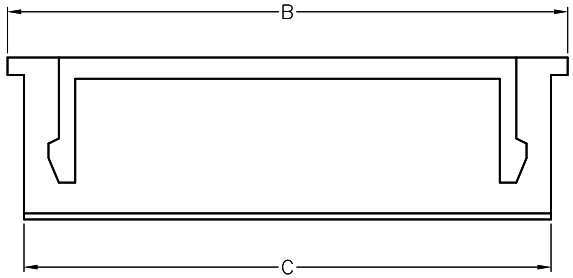



Positions: 2 thru 20
A = .098 [2.50] x No. of Spaces
B = .098 [2.50] x No. of Positions + .091 [2.30]
C = .098 [2.50] x No. of Positions + .028 [0.70]

SPECIFICATIONS:
Material:
Insulator: Nylon 66, rated UL 94V-0
Insulator color: Natural
Electrical:
Rated Voltage: 250V AC/DC
Rated Current: 3A AC/DC
Contact Resistance: 20 mohms max.
Insulation resistance: 1,000 Mohms min.
Withstand voltage: 1000V AC for 1 minute.
Temperature Rating:
-25°C to +85°C
Environmental:
Lead free, RoHS compliant

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	LFJ	4/13/06
CHECKED		
APPROVED		

ADAM TECH INTERCONNECTS
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE
WIRE TO BOARD PITCH: 2.5MM
CRIMP HOUSING STRAIGHT TYPE

SIZE	PART NO.	REV.
X	25CH-B-XX	C

REF:	SCALE:	SHEET
S00124T	NTS	1 OF 1