Multi-Tap Connector with Clear Insulation, Double-Sided

LISTED CERTIFIED

For Use with Aluminum or Copper Code Conductors

Type PCSB

- Flexible design – can be used as a tap, splice, or dead end connector
- Body made from high strength, extruded aluminum alloy to provide premium electrical and mechanical performance
- Insulated with clear PVC to eliminate the need for taping and allow for visual inspection of the complete conductor insertion
- Each port pre-filled with oxide inhibiting joint compound seals out air and moisture to deter surface oxidation
- Wide wire range-taking capability minimizes inventory requirements
- Dual-sided entry allows offset and opposite entry for primary and secondary conductors
- Plated steel or aluminum set screw provides high strength, durable electrical contact between conductor and connector
- UL Listed and CSA Certified for use up to 600 V and temperature rated 90°C

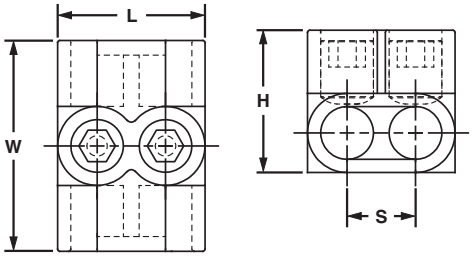

Part Number	Conductor Size Range	No. of Ports	Figure Dimensions (In.) L	W	H	S	Hex Key Size (In.)	Std. Pkg. Qty.
PCSB4-2-12Y	#4 – #14 AWG STR #10 – #14 AWG SOL	2	1.23	1.50	1.25	0.53	1/8	12
PCSB4-3-12Y		3	1.76	1.50	1.25	0.53	1/8	12
PCSB4-4-6Y		4	2.29	1.50	1.25	0.53	1/8	6
PCSB4-5-6Y		5	2.82	1.50	1.25	0.53	1/8	6
PCSB4-6-6Y		6	3.35	1.50	1.25	0.53	1/8	6
PCSB4-8-4Y		8	4.41	1.50	1.25	0.53	1/8	4
PCSB4-10-4Y		10	5.47	1.50	1.25	0.53	1/8	4
PCSB4-12-3Y		12	6.53	1.50	1.25	0.53	1/8	3
PCSB4-14-2Y		14	7.59	1.50	1.25	0.53	1/8	2
PCSB2/0-2-12	2/0 – #14 AWG STR #10 – #14 AWG SOL	2	1.52	1.56	1.38	0.67	3/16	12
PCSB2/0-3-6		3	2.19	1.56	1.38	0.67	3/16	6
PCSB2/0-4-6		4	2.86	1.56	1.38	0.67	3/16	6
PCSB2/0-5-6		5	3.53	1.56	1.38	0.67	3/16	6
PCSB2/0-6-6		6	4.20	1.56	1.38	0.67	3/16	6
PCSB2/0-8-4		8	5.55	1.56	1.38	0.67	3/16	4
PCSB2/0-10-2Y		10	6.89	1.56	1.38	0.67	3/16	2
PCSB2/0-12-2Y		12	8.24	1.56	1.38	0.67	3/16	2
PCSB2/0-14-1Y		14	9.58	1.56	1.38	0.67	3/16	1
PCSB250-2-6Y	250 kcmil – #10 AWG STR	2	2.03	2.63	2.13	0.94	5/16	6
PCSB250-3-6Y		3	2.97	2.63	2.13	0.94	5/16	6
PCSB250-4-6Y		4	3.91	2.63	2.13	0.94	5/16	6
PCSB250-5-4Y		5	4.84	2.63	2.13	0.94	5/16	4
PCSB250-6-4Y		6	5.78	2.63	2.13	0.94	5/16	4
PCSB250-8-3Y		8	7.66	2.63	2.13	0.94	5/16	3
PCSB250-10-2Y		10	9.53	2.63	2.13	0.94	5/16	2
PCSB250-12-2Y		12	11.41	2.63	2.13	0.94	5/16	2
PCSB250-14-1Y		14	13.29	2.63	2.13	0.94	5/16	1

‡‡Not UL Listed or CSA Certified.

Multi-Tap Connector with Clear Insulation, Double-Sided (continued)

LISTED CERTIFIED

Part Number	Conductor Size Range	No. of Ports	Figure Dimensions (In.)				Hex Key Size (In.)	Std. Pkg. Qty.
			L	W	H	S		
PCSB350-2-4	350 kcmil – #10 AWG STR #10 AWG SOL	2	2.17	3.00	2.50	1.00	3/8	4
PCSB350-3-4		3	3.17	3.00	2.50	1.00	3/8	4
PCSB350-4-3		4	4.17	3.00	2.50	1.00	3/8	3
PCSB350-5-3		5	5.17	3.00	2.50	1.00	3/8	3
PCSB350-6-2		6	6.17	3.00	2.50	1.00	3/8	2
PCSB350-8-2		8	8.17	3.00	2.50	1.00	3/8	2
PCSB350-10-2Y		10	10.17	3.00	2.50	1.00	5/16	2
PCSB350-12-1Y		12	12.17	3.00	2.50	1.00	5/16	1
PCSB350-14-1Y		14	14.17	3.00	2.50	1.00	5/16	1
PCSB600-2-4Y	600 kcmil – #6 AWG STR	2	2.72	3.00	2.75	1.28	3/8	4
PCSB600-3-3Y		3	4.00	3.00	2.75	1.28	3/8	3
PCSB600-4-2Y		4	5.28	3.00	2.75	1.28	3/8	2
PCSB600-5-2		5	6.56	3.00	2.75	1.28	3/8	2
PCSB600-6-2Y		6	7.84	3.00	2.75	1.28	3/8	2
PCSB600-8-2Y		8	10.41	3.00	2.75	1.28	3/8	2
PCSB600-10-1Y		10	12.97	3.00	2.75	1.28	3/8	1
PCSB600-12-1Y		12	15.53	3.00	2.75	1.28	3/8	1
PCSB600-14-1Y		14	18.09	3.00	2.75	1.28	3/8	1
PCSB750-2-2Y‡‡	750 kcmil – #2 AWG STR	2	2.88	3.38	3.00	1.38	3/8	2
PCSB750-3-2Y‡‡		3	4.25	3.38	3.00	1.38	3/8	2
PCSB750-4-2Y‡‡		4	5.63	3.38	3.00	1.38	3/8	2
PCSB750-5-1Y‡‡		5	7.00	3.38	3.00	1.38	3/8	1
PCSB750-6-1Y‡‡		6	8.38	3.38	3.00	1.38	3/8	1
PCSB750-8-1Y‡‡		8	11.13	3.38	3.00	1.38	3/8	1
PCSB750-10-1Y‡‡		10	13.88	3.38	3.00	1.38	3/8	1

‡‡Not UL Listed or CSA Certified.