



THESE DRAWINGS ARE THE PROPERTY OF QUALTEK ELECTRONICS AND NOT TO BE REPRODUCED FOR OR COMMUNICATED TO A THIRD PARTY WITHOUT THE EXPRESS WRITTEN PERMISSION OF AN OFFICER OF QUALTEK ELECTRONICS.

REVISION			
REV.	DESCRIPTION	DATE	APPROVED
A	Changed Cable OD From 4.2 to 4.0	03-12-07	DP
B	Updated Specifications	02-09-12	LY

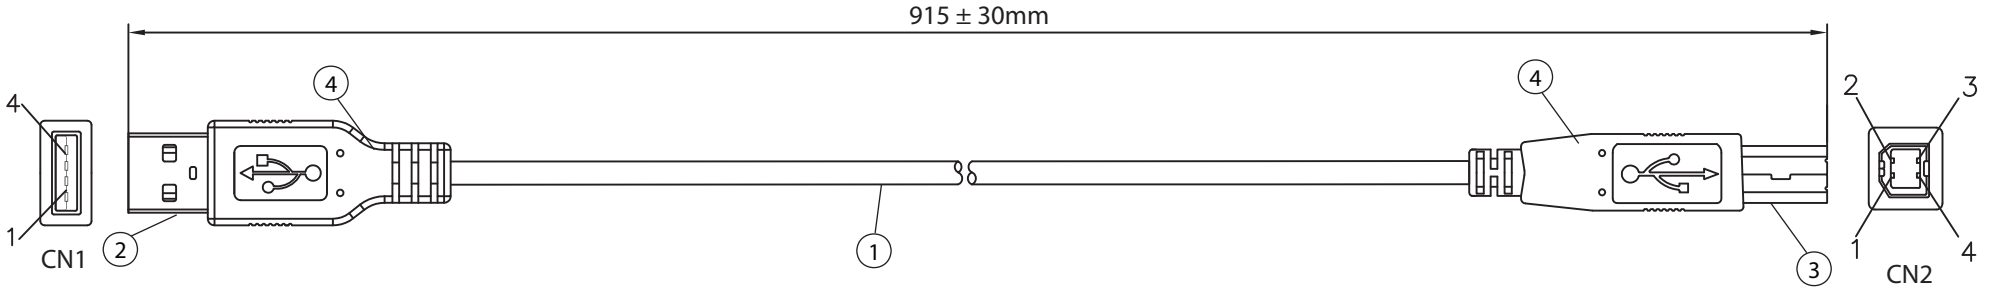

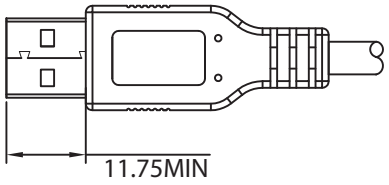

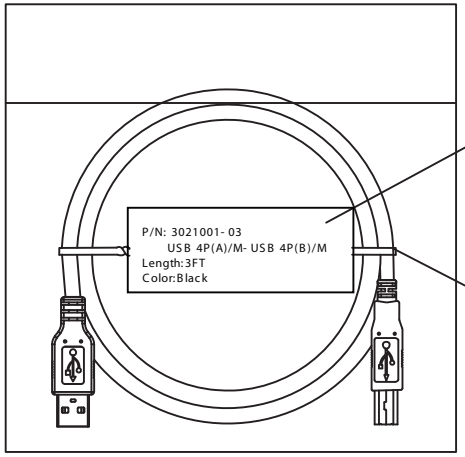

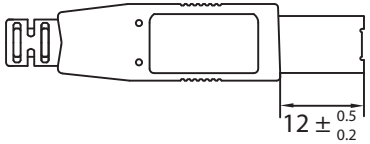

P/N: 3021001- 03
USB 4P(A)/M- USB 4P(B)/M
Length:3FT
Color:Black

CONNECTION

CN1		CN2
1	RED	1
2	WHITE	2
3	GREEN	3
4	BLACK	4
SHELL	BRAID&DRAIN	SHELL

NOTES:
1. CABLE: UL2725 28/28AWG
   28AWGx1P+28AWGx2C+ AEB(AL) 65%
   OUTER JACKET: BLACK, OD: 4.0 ± 0.2mm
2. CONNECTOR: USB A TYPE MALE
   INSULATOR: WHITE PBT
   PIN G/F
   NICKEL PLATED SHELL
3. CONNECTOR: USB B TYPE MALE
   INSULATOR: WHITE PBT
   PIN G/F
   NICKEL PLATED SHELL
4. PVC MOLDED: COLOR V398 45P BLACK
5. ELECTRICAL TEST:
   <1>.100% OPEN SHORT & MISS WIRE TEST
   <2>. INSULATION RESISTANCE: DC400V 10M ohm MIN.
   <3>. CONDUCTOR RESISTANCE: 3 ohm MAX.
6. PACKING: 1PC/POLYBAG W/ LABEL

CONTROLLED

Dim range (mm)	Tolerance +/- (mm)
0-1	0.15
1-6	0.20
6-18	0.30
18-50	0.50
50-120	0.70
120-250	0.90
250-500	1.20

Qualtek Electronics Corp.
WCI DIVISION

Part Number: 3021001-03 RoHS Compliant

Description: USB 4P(A)/M - USB 4P(B)/M

	UNIT: mm	REV. B
Drawn / Date	Checked / Date	Approved / Date
B. Grubb 01-25-07	01-25-07	JJH / 01-25-07