
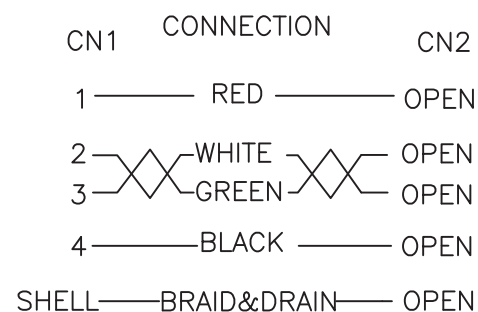
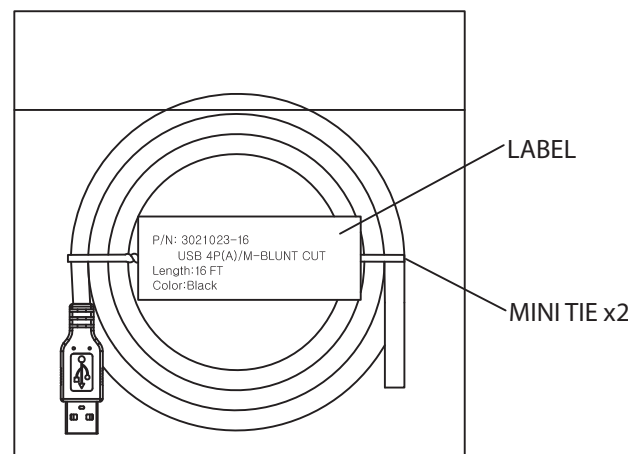


REVISION			
REV.	DESCRIPTION	DATE	APPROVED
B	Updated Specifications	02-09-12	LY

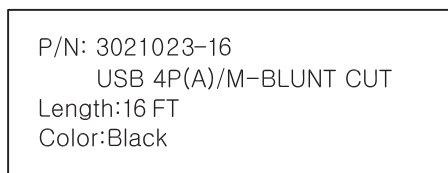

1. CABLE: UL2725 24/26AWG
26AWGx1P+24AWGx2C+ AEB(AL) 65%
OUTER JACKET: BLACK, OD: $4.5 \pm 0.2\text{mm}$
2. CONNECTOR: USB A TYPE MALE
INSULATOR: WHITE PBT
PIN G/F
GOLD PLATED SHELL
3. BLUNT CUT
4. PVC MOLDED: COLOR V398 45P BLACK
5. ELECTRICAL TEST:
 <1>.100% OPEN SHORT & MISS WIRE TEST
 <2>.INSULATION RESISTANCE: DC400V 10M ohm MIN.
 <3>.CONDUCTOR RESISTANCE: 3 ohm MAX.
6. PACKING: 1PC/POLYBAG W/ LABEL

CONTROLLED

Dim range (mm)	Tolerance +/- (mm)	Qualtek Electronics Corp. WCI DIVISION		
		Part Number: 3021023-16		
0-1	0.15	Description: USB 4P(A)/M - BLUNT CUT		
1-6	0.20			
6-18	0.30		UNIT: mm	REV. B
18-50	0.50			
50-120	0.70			
120-250	0.90	Drawn / Date	Checked / Date	Approved / Date
250-500	1.20	B. Grubb 01-26-07	01-26-07	JJH / 01-26-07