


THESE DRAWINGS ARE THE PROPERTY OF QUALTEK ELECTRONICS AND NOT TO BE REPRODUCED FOR OR COMMUNICATED TO A THIRD PARTY WITHOUT THE EXPRESS WRITTEN PERMISSION OF AN OFFICER OF QUALTEK ELECTRONICS.

REVISION			
REV.	DESCRIPTION	DATE	APPROVED

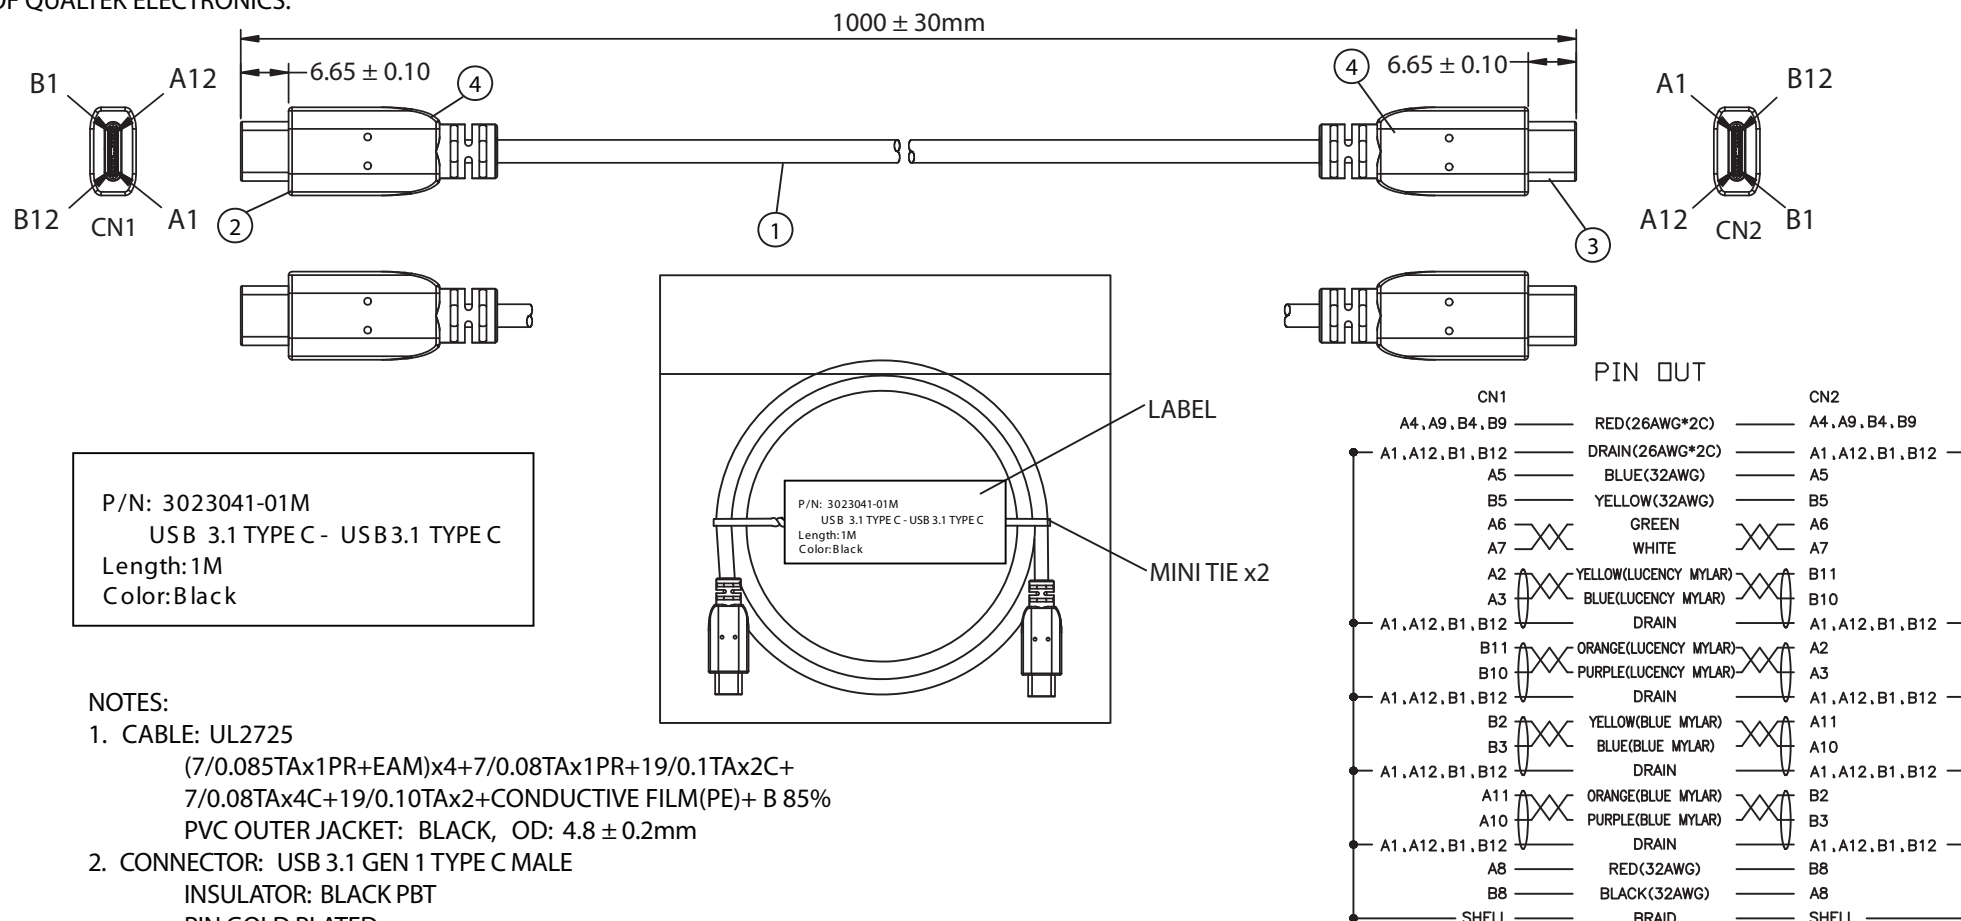

P/N: 3023041-01M
USB 3.1 TYPE C - USB 3.1 TYPE C
Length: 1M
Color: Black

NOTES:

- CABLE: UL2725
(7/0.085TAx1PR+EAM)x4+7/0.08TAx1PR+19/0.1TAx2C+
7/0.08TAx4C+19/0.10TAx2+CONDUCTIVE FILM(PE)+ B 85%
PVC OUTER JACKET: BLACK, OD: 4.8 ± 0.2mm
- CONNECTOR: USB 3.1 GEN 1 TYPE C MALE
INSULATOR: BLACK PBT
PIN GOLD PLATED
NICKEL PLATED SHELL
PCB WITH E-MARKED
- CONNECTOR: USB 3.1 GEN 1 TYPE C MALE
INSULATOR: BLACK PBT
PIN GOLD PLATED
NICKEL PLATED SHELL
- PVC MOLDED: COLOR V398 45P BLACK
- ELECTRICAL TEST:
<1>.100% OPEN SHORT & MISS WIRE TEST
- DATA TRANSFER RATE UP TO 5Gbps (NOMINAL)
- CURRENT RATING UP TO 5A (NOMINAL)
- VOLTAGE RATING UP TO 12V (NOMINAL)
- PACKING: 1PC/POLYBAG W/ LABEL

CONTROLLED

Dim range (mm)		Tolerance +/- (mm)		Qualtek Electronics Corp. WCI DIVISION		
0-1		0.15		Part Number: 3023041-01M RoHS Compliant		
1-6		0.20		Description: USB 3.1(C)/M - USB 3.1 (C)/M		
6-18		0.30		UNIT: mm		
18-50		0.50		UNIT: mm		
50-120		0.70		Drawn / Date	Checked / Date	Approved / Date
120-250		0.90		R. Nuti 08-24-15	08-24-15	LY / 08-24-15
250-500		1.20				