
ITEM NO.	PART NUMBER	DESCRIPTION	QTY.	COMPONENT NOTES
1	30-00946	Wire, 10C BC, 20 AWG, UL20280, 300V, 80C, 8.5 mm, braided shield, FT2, TPU	1	

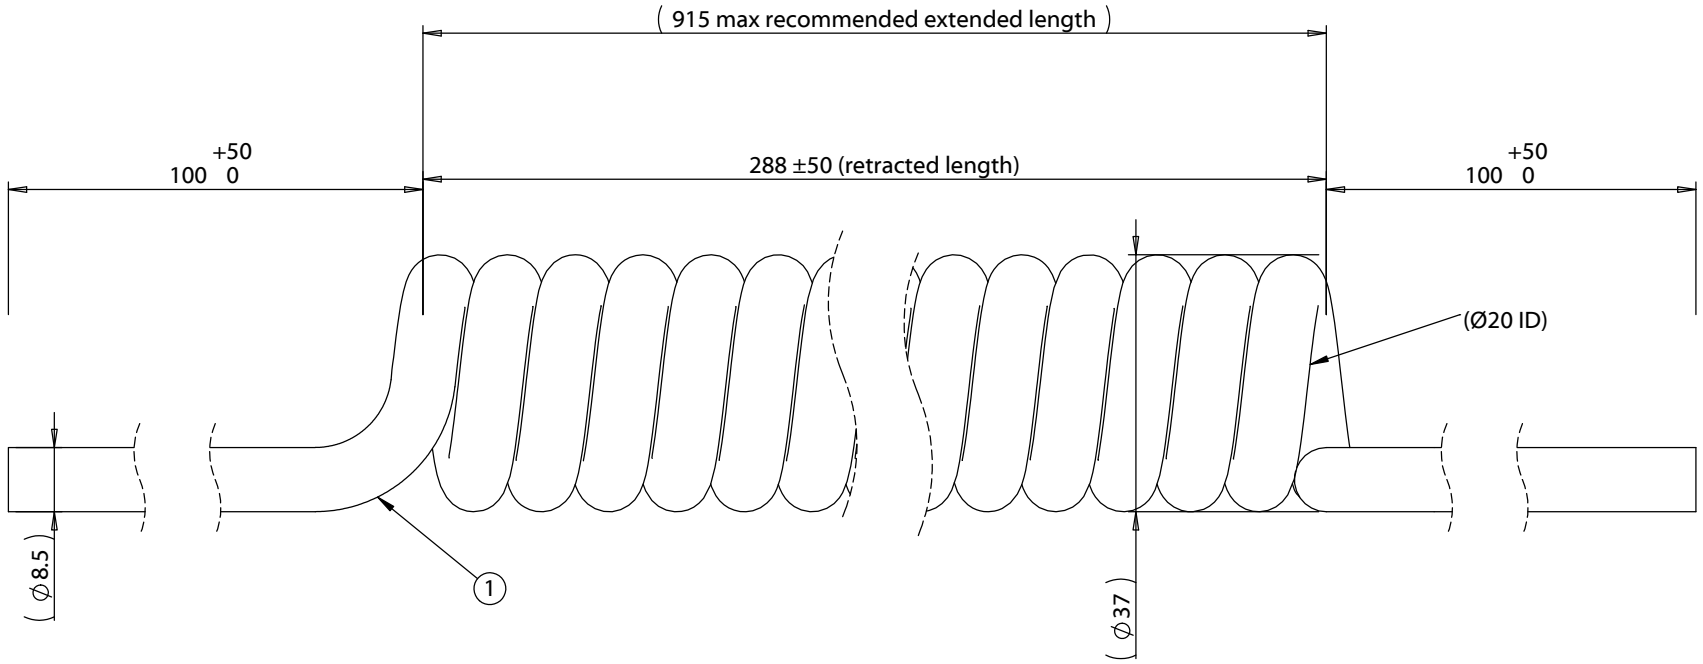

Notes:
Total wire length for resistance calculation: 3250 mm

Revision:	Date:	Description:
A	10/18/2018	Initial release

Prepared: AW Digitally signed by AW Date: 2018.10.18 12:14:24 -07'00'

Verified: RS Digitally signed by RS Date: 2018.10.18 16:12:08 -07'00'

Dimensions are in millimeters.
Tolerances:
X: ± 0.5 mm
X.X: ± 0.3 mm
X.XX: ± 0.05 mm

Notes:

RoHS and REACH compliant
Phthalate and halogen free
Function test: no open, no short circuit, no intermittent

Description:

Coiled cable, 1115 mm, 10C blunt cut to same, 20 AWG, 8.5 mm, TPU, shielded, 30-00946 wire

TENSILITY

tel 1.541.323.3228 *800* 877.670.7118
fax 1.541.323.4202 *web* tensility.com

Size: A

Part number: 31-00147

Scale: 1:1

Sheet 1 of 1

5 4 3 2 1

To see a custom version of this cable assembly, call Tensility at 541-323-3228 or email engineering@tensility.com