


REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	04/20/18	C.E.



PANEL CUT OUT



	inches	
	Maxi	mini
A	.198	.192
B	.183	.177

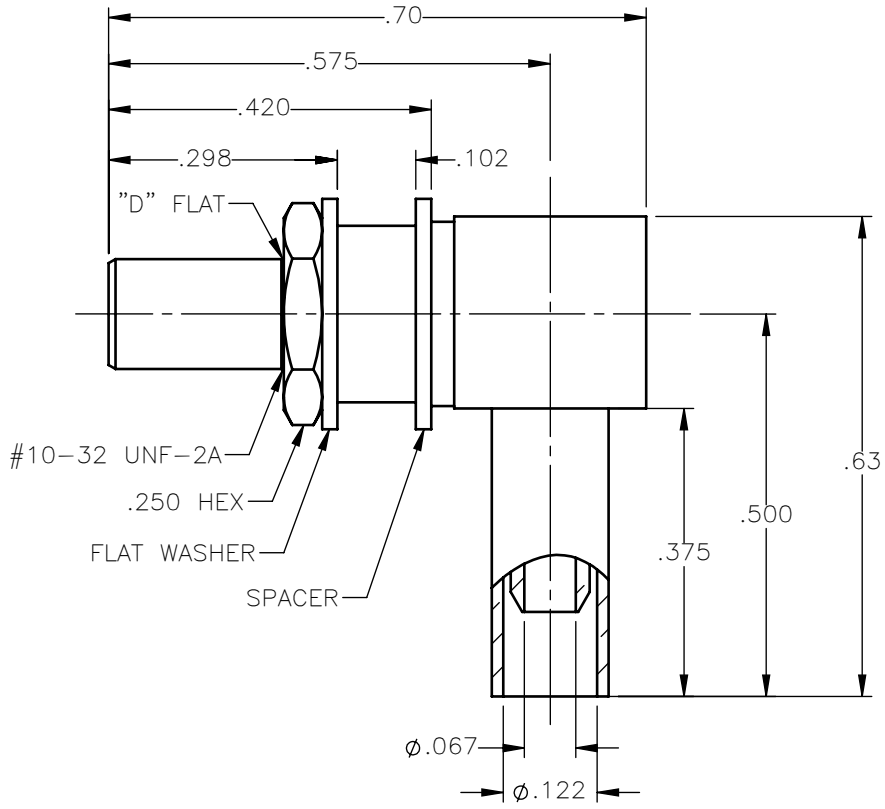

NOTES:

MATERIALS:

1. INSULATORS = VIRGIN WHITE TEFLON PER ASTM D1710, GRADE 1, TYPE I, CLASS "B".
2. LOCKWASHER = PHOSPHOR BRONZE PER ASTM B139, COPPER ALLOY C53400, TEMPER H04.
3. CRIMP SLEEVE = SEAMLESS LOWLEAD BRASS TUBE, ALLOY 330, SOFT ANNEAL TEMPER, .025/.060 GRAIN SIZE OR SEAMLESS COPPER TUBE PER ASTM B75, TYPE C12000, TEMPER: LIGHT ANNEAL O50 EXCEPT YIELD STRENGTH.
4. ALL OTHER METAL PARTS = BRASS PER ASTM B16, ALLOY C36000, TEMPER H02.

FINISHES:

1. CONTACT = GOLD PLATE PER ASTM B488–11, TYPE II, 50µin MIN, GRADE C, OVER 100 TO 200µin STRESS FREE SULFAMATE NICKEL PER AMS–QQ–N–290.
2. ALL OTHER METAL PARTS = NICKEL PLATE PER AMS–QQ–N–290, CLASS 1, GRADE G, EXCEPT 100 TO 200µin THICK OVER 50 TO 100µin THICK COPPER PER AMS 2418.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ON

DECIMAL | ANGLE

DWN: C.E. DATE 04/20/18

CHKD: D.N. DATE 04/20/18

APVD: J.M. DATE 04/20/18

AEP a RADIALL company

Property of Radiall
This document cannot be reproduced or communicated to a third party without prior written permission of RADIALL.

SLB RIGHT ANGLE MALE JACK BULKHEAD/FLOAT MOUNT CRIMP TYPE FOR RG–316 & SIMILAR CABLES

REFERENCE:

ORIGINATED: C.E.
DATE: 04/20/18

MATERIALS & FINISHES:

SEE NOTES

SIZE	FSCM NO.	DWG NO.	REV
A	19505	3106–7521–703	A

SCALE 4:1 | THIRD ANGLE PROJECTION | SHEET 1 OF 1

3106–7521–703