SPRING-LOADED CONNECTORS

SERIES 319, 330 • .100" GRID TARGET CONNECTORS FOR SPRING-LOADED ASSEMBLIES • SINGLE ROW STRIPS

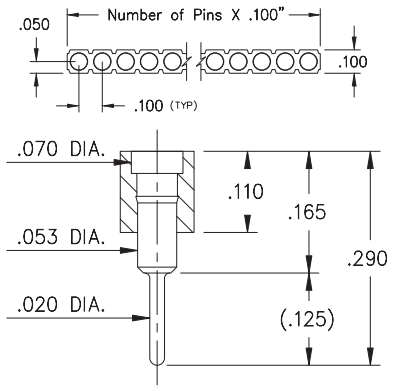


FIG. 1

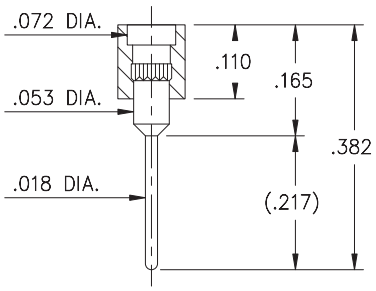


FIG. 2

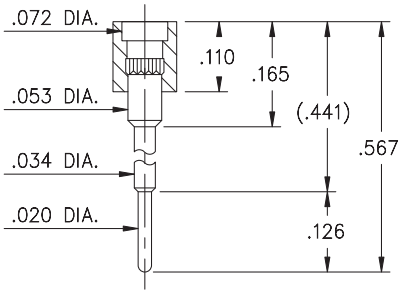


FIG. 3


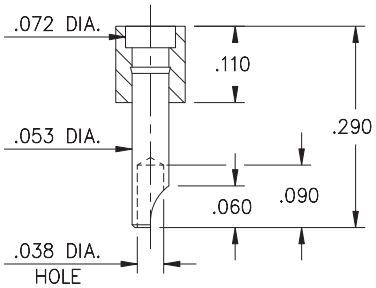


FIG. 4

- Series 319 and 330 Spring Target Connectors, supplied in single row strips. Available in through-hole and wire termination configurations
- Target Connectors provide an excellent gold-plated conductive mating surface for spring loaded connectors. These series are offered with a flat face for making contact with our standard .042" dia. spring pin plungers
- Target connectors use MM #1938, #1940, #1942 and #3024 pins. See page 218 for details
- Insulators are high temperature thermoplastic

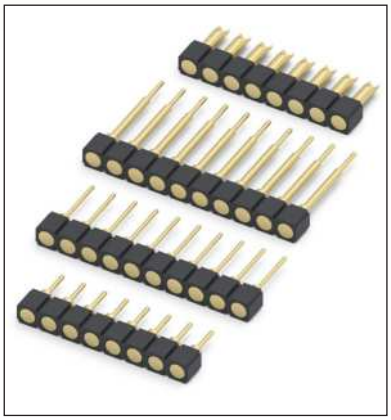

ORDERING INFORMATION

FIG. 1	**Series 319...001**	**Standard Solder Tails**
	319-10-1__-00-001000 **Specify number of pins** ← 01-64	
FIG. 2	**Series 319...002**	**Long Solder Tails**
	319-10-1__-00-002000 **Specify number of pins** ← 01-64	
FIG. 3	**Series 319...005**	**Elevated with Solder Tails**
	319-10-1__-00-005000 **Specify number of pins** ← 01-64	
FIG. 4	**Series 330...240**	**Solder Cups**
	330-10-1__-00-240000 **Specify number of pins** ← 01-64	

RoHS-2 2011/65/EU

XX=Plating Code See Below

For Electrical, Mechanical & Enviromental Data, See page 264

SPECIFY PLATING CODE XX=	10 ◆			
Pin Plating	10 µ" Au			

Mill-Max Mfg. Corp. • 190 Pine Hollow Road, P.O. Box 300, Oyster Bay, NY 11771 • 516-922-6000 • Fax: 516-922-9253 • www.mill-max.com