THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART NUMBER	STUD SIZE	DIMENSIONS in.				
		A ±.03	W ±.01	C ±.02	M ±.03	H ±.01
PN14-6FN	#6	.79 (20.07)	.24 (6.10)	.19 (4.83)	.65 (16.51)	.15 (3.81)
PN14-6F	#6	.79 (20.07)	.28 (7.11)	.19 (4.83)	.65 (16.51)	.15 (3.81)
PN14-8F	#8	.85 (21.59)	.31 (7.87)	.23 (5.84)	.67 (17.02)	.17 (4.32)
PN14-10F	#10	.87 (22.10)	.34 (8.64)	.24 (6.10)	.71 (18.03)	.20 (5.08)
PN14-10FN	#10	.87 (22.10)	.31 (7.87)	.24 (6.10)	.71 (18.03)	.20 (5.08)
PN14-14F	1/4"	1.02 (25.91)	.44 (11.18)	.32 (8.13)	.77 (19.56)	.27 (6.86)

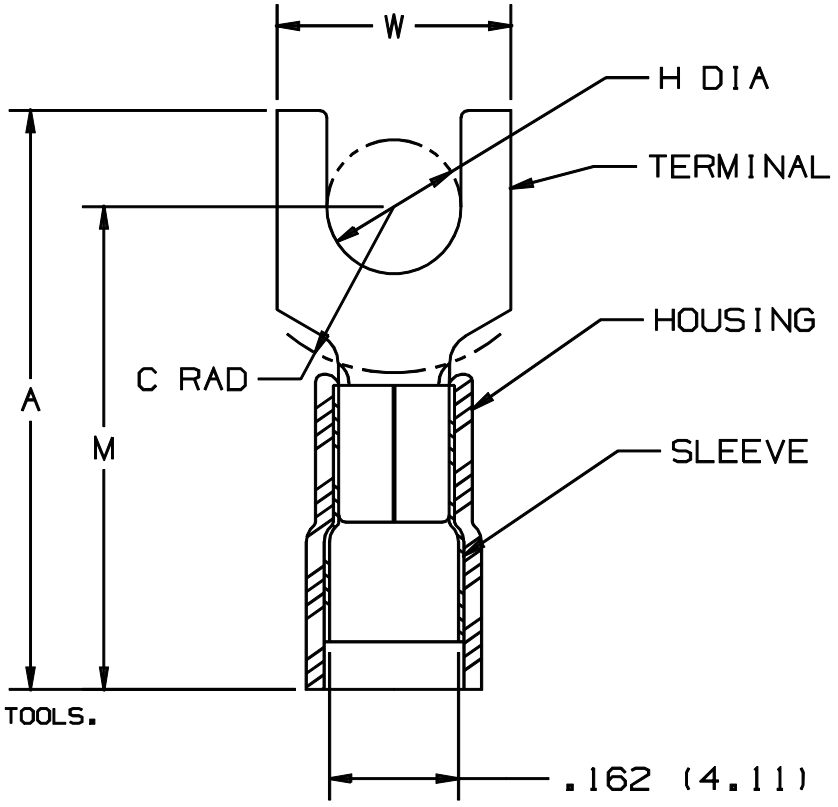

NOTES:

1. UL LISTED AND CSA CERTIFIED FOR:
   A. 600V. MAX. BLDG WIRE (1000 V. MAX IN SIGNS, FIXTURES & LUMINAIRES),
   B. #18-14 AWG SOLID OR STRANDED COPPER WIRE WITH THE CT-550, CT-500,CT-1550,CT-1551 CT-460 (UL ONLY) AND CT-400 (UL ONLY) INSTALLATION TOOLS.
   C. #16-14 AWG SOLID OR STRANDED COPPER WIRE WITH THE CT-100 AND CT-250 INSTALLATION TOOLS.
   D. 221°F (105°C) MAX TEMP. RATING
2. MATERIAL:
   A. STAMPING - .032" (.81) THK COPPER, TIN PLATED
   B. HOUSING - NYLON, BLUE
   C. SLEEVE - BRASS, TIN PLATED
3. STRIP LENGTH - 7/32 $^{+1/32}_{-0}$
4. PACKAGE QTY:
   -C=100
   -M=1000
5. DIMENSIONS IN BRACKETS ARE IN MILLIMETERS

LISTED 587H E52164

CERTIFIED LR31212

A41192_03

REV	DATE	BY	CHK	DESCRIPTION	ECN#	CUST	PM
03	1/01	KMD		CAD FILE SPEC. WAS N41192AA_PCD_02			
02	1/97	JAMB		ADDED DIM."MIN. WIRE INSULATION DIA." UPDATE NOTES	05380		
01	6/95	MS	RLS	UPDATED NOTES AND DIMENSIONS	03405	LA	KRS
00	3/88	FS	LM	RELEASED		LA	JB

PANDUIT CORP. TINLEY PARK, ILLINOIS

3PC. NYLON INSULATED, 16-14 BARREL, FORKS

DRAWN BY	CH'D	SCALE	DRAWING NO.
FES	LA	NONE	A41192