

NOTE: REFERENCE STANDARD IEC60169-11	332101		REVISIONS			
	DRAWING NO.	REV	DESCRIPTION	DATE	ECO	APPR
	THIRD ANGLE PROJ. 	A	RELEASE TO MFG.	03-Oct-13	--	AAP/BG

I. ELECTRICAL PERFORMANCE -

NOMINAL IMPEDANCE	: 50 ±2 Ω
FREQUENCY RANGE	: DC-3.0 GHz
VSWR	: 1.08 MAX.
INSERTION LOSS	: 0.05 dB MAX. (@ 3.0 GHz)
P1M	: -165 dBc MAX. (2x43dBm)
INSULATION RESISTANCE	: 5000 MΩ MIN.
D.W.V	: 2500 VRMS
CONDUCTOR RESISTANCE	: OUTER CONDUCTOR 0.5 mΩ MAX. INNER CONDUCTOR 1.0 mΩ MAX.

II. MECHANICAL PERFORMANCE

RETENTION	: 4 N MIN.
INNER CONDUCTOR TORQUE	: 0.2 N-m
MATING CYCLES	: 500 MIN.


III. MATERIAL AND PLATING -

INNER CONDUCTOR	: SPRING COPPER ALLOY, PLATING = Ag (5µm MIN.)
OUTER CONDUCTOR	: BRASS, PLATING = COPPER-TIN-ZINC (2µm MIN.)
INSULATOR	: PTFE




IV. ENVIRONMENTAL -

TEMP. RANGE	: -40°C TO +85°C
WEATHER STANDARD	: IEC 60068 40/ 85/ 21
THERMAL SHOCK	: MIL-STD 202, METHOD 107, CONDITION B
VIBRATION	: MIL-STD 202, METHOD 204, CONDITION B
SHOCK	: MIL-STD 202, METHOD 213, CONDITION I
WATERPROOFING STANDARD	: IP 67

V. ROHS COMPLIANT

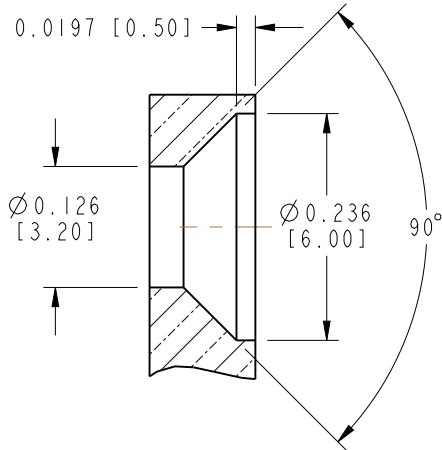

SECTION B-B
SCALE 5.000

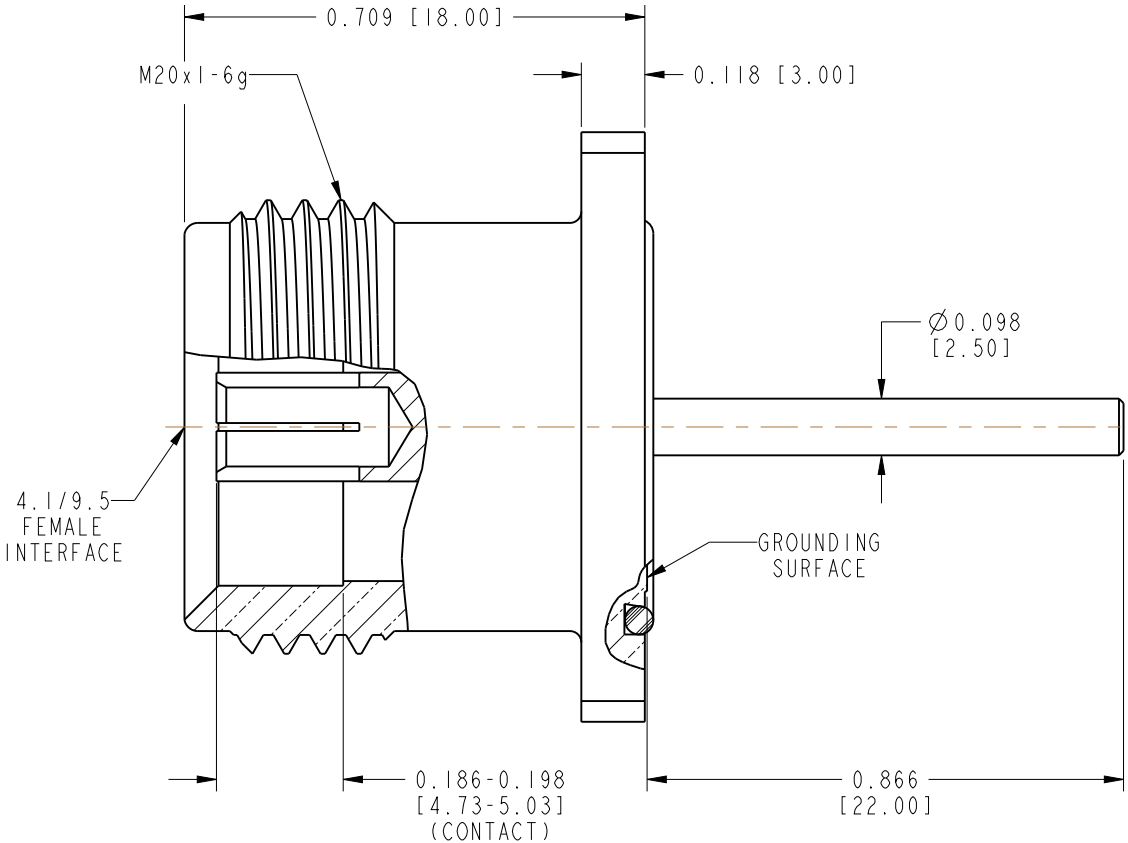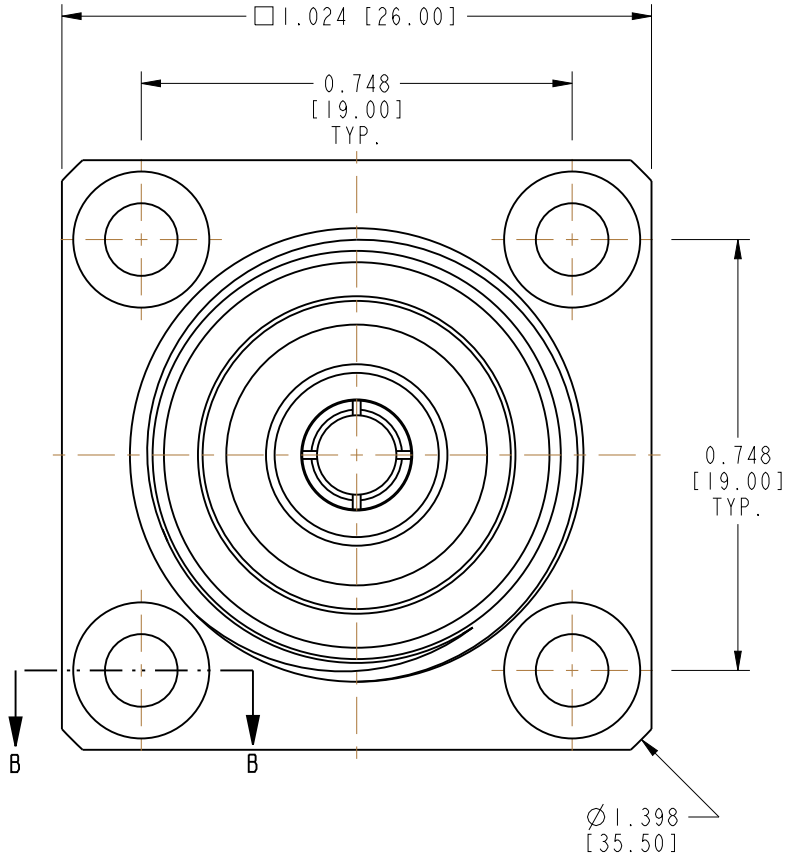

SCALE 1.000

CUSTOMER OUTLINE DRAWING
ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES AND TOLERANCES ARE: 2 PLACE DECIMAL 3 PLACE DECIMAL ANGLES ±.015 (0,381 mm) ±.005 (0,127 mm) ± 1°	MATERIAL SEE NOTES	DRAWN A ARUN PRABU	DATE 12-Sep-13	TITLE 4.1/9.5 FEMALE PANEL		Amphenol Connex	
		ENGINEER A ARUN PRABU	DATE 12-Sep-13				
	REFERENCE	APPROVED B.C. GLEISSNER	DATE 03-Oct-13	SCALE: 3.0:1		SHEET	1 OF 1
		CAD FILE			DWG SIZE B	DRAWING NO. 332101	REV A