


Number of contacts

9–50



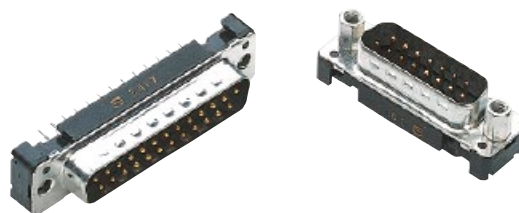


Turned solder pins, straight without grounding-pins

Identification	No. of contacts	Part number	
Performance levels Explanations see page 05.04 Other performance levels on request		Performance level 3	Performance level 2
Male connector metal shell with dimples			
available on request	9	09 66 121 770 .	09 66 121 670 .
	15	09 66 221 770 .	09 66 221 670 .
	25	09 66 321 770 .	09 66 321 670 .
	37	09 66 421 770 .	09 66 421 670 .
	50	09 66 521 770 .	09 66 521 670 .
Please insert digit for flange thread or fitted female screw locks M3 ▶ 1 4-40 UNC ▶ 2 fitted screw locks 4-40 UNC ▶ 3			




Male connector

9-37 50

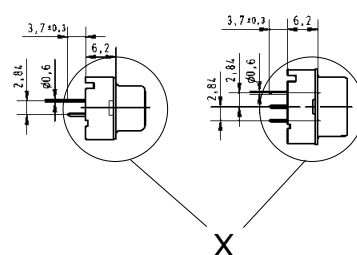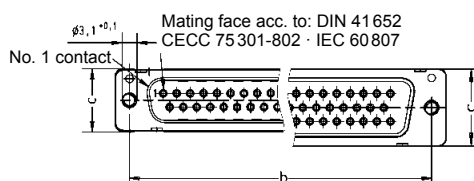

	a	b ± 0.1	c	g	h
9	30.9	25.0	12.9	4 x $2.74 = 10.96$	3 x $2.74 = 8.22$
15	39.2	33.3	12.9	7 x $2.74 = 19.18$	6 x $2.74 = 16.44$
25	53.1	47.0	12.9	12 x $2.76 = 33.12$	11 x $2.76 = 30.36$
37	69.4	63.5	12.9	18 x $2.76 = 49.68$	17 x $2.76 = 46.92$
50	67.0	61.1	15.7	16 x $2.76 = 44.16$	15 x $2.76 = 41.40$

Board drillings

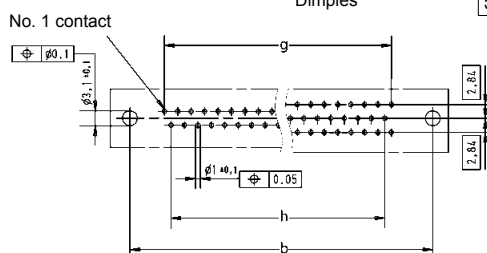M3 or
4-40 UNCfitted screw locks
4-40 UNC

Dimensions in mm

Mating conditions see page 05.04