
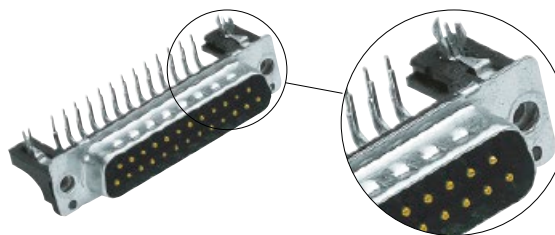


Number of contacts

Mounting height

Low-Profile Versions

9–37
50



Turned solder pins, angled with snap-in-clips and grounding board locks

Identification

No. of contacts

Part number

Performance levels


Explanations see page 05.04

Other performance levels on request

Performance level
3Performance level
2

Male connector

metal shell with dimples



available
on request

9
15
25
37
50

2.54 mm pitch

09 66 162 781 .
09 66 262 781 .
09 66 362 781 .
09 66 462 781 .
09 66 562 781 .

2.54 mm pitch

09 66 162 681 .
09 66 262 681 .
09 66 362 681 .
09 66 462 681 .
09 66 562 681 .

Please insert digit for flange thread
or fitted female screw locks

M3 ▶ 5

4-40 UNC ▶ 6

fitted screw locks 4-40 UNC ▶ 7