# Precision Test Adapters

## 2.4 mm(M) to 3.5 mm(M)

withwave
*Versatile RF & MW Test Solutions*

***Withwave's Precision Test Adapters*** are designed based on precision microwave interconnection technologies.
This 2.4 mm(M) to 3.5mm(M) adapter is manufactured to precise
Microwave specifications and constructed with male gender on side 1 and male gender side 2.
The precision microwave connector interfaces ensure an excellent microwave performance up to 34 GHz



## Features

- Frequency range : DC to 34 GHz
- VSWR : 1.25 : 1(Max) @ 34 GHz

## Specification


| Scope | Specification | AD02M04MS1 |
|---|---|---|
| Electrical | Impedance(Ohm) | 50 |
| | Operation Freq.(GHz) | DC to 34 GHz |
| | VSWR (Max) | 1.25: 1 |
| Material | Dielectric | Ultem1000 |
| | Center Contact | Brass with gold plated |
| | Body | Passivated Stainless Steel |

** RoHS Compliant*

## ■ *Drawing*

**Part No.: AD02M04MS1**

Unit : mm[inch]

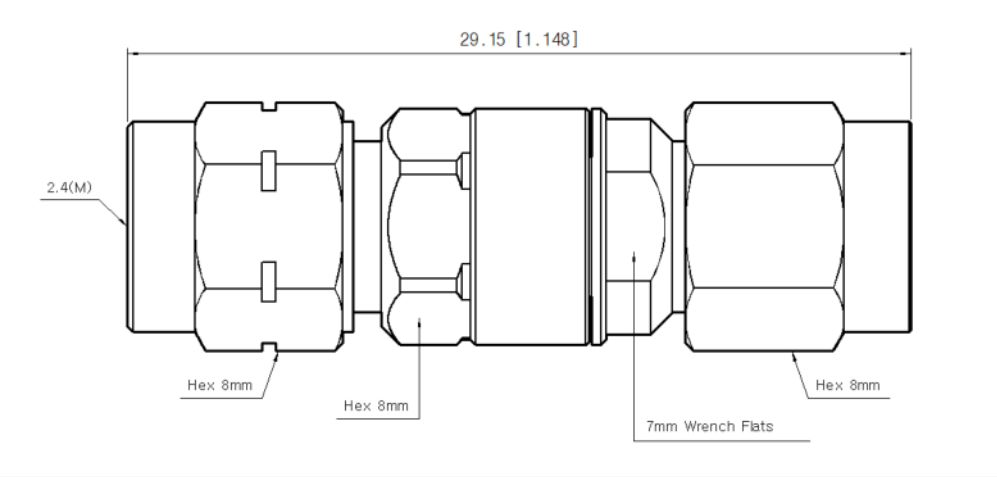


## ■ *Test Result*

▪ **Frequency : 10 MHz to 34 GHz**

