

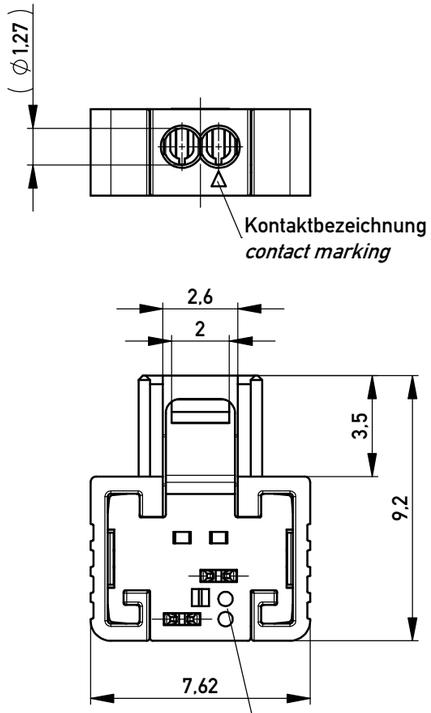





mit aufgesetzter Kabelführung (Anlieferungszustand)
with cable guide mounted (state at time of supply)

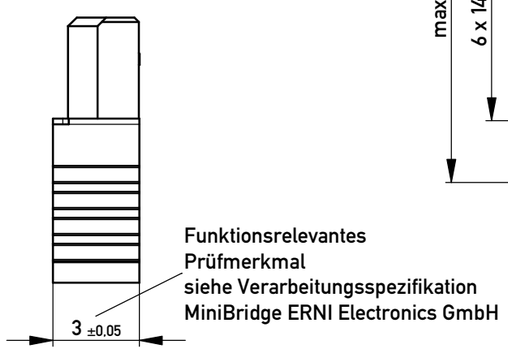



Kabelführung verpresst
(cable guide pressed on)

Verpackt in Tray - *tray packaging*
Verpackungseinheit 280 Stück - *packaging unit 280 pcs*

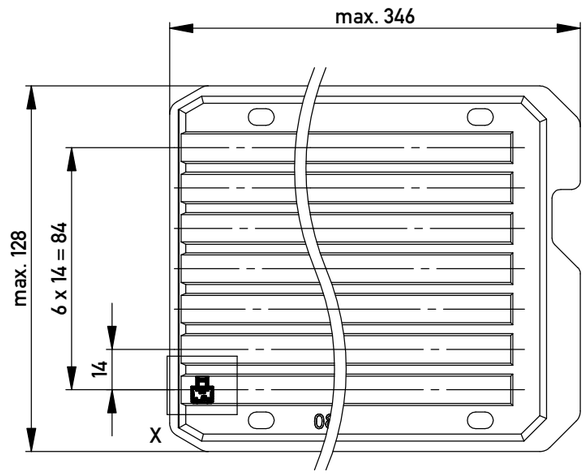

Einzelheit X - *detail X*
M 2:1



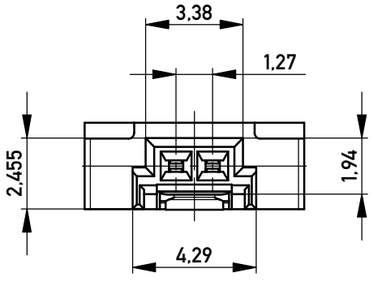

Federkontakt AWG 22 - *Female Contact AWG 22*
Kabelführung Ø1,27 - *cable guide Ø 1,27*

nur mit Hilfsmittel lösbar, für Einzeladern, für die Anforderung nach PG 9 der LV214 (Koshiri-Sicherheit)

only with tool unlockable, for single conductors, for the requirement of the LV214 PG 9 (Koshiri-security)

Information:

Tolerances

All Dimensions in mm

Scale 5:1

All rights reserved.
Only for Information.
To ensure that this is the latest version of this drawing, please contact one of the ERNI companies before using.

Subject to modification without prior notice.
Drawing will not be updated.

Designation

F 1,27 SRC A IDC 02-pin KS

d=1,27 AWG 22 Positive Lock

www.ERNI.com

474141

I

A3

Index		Date	
b		19.05.2015	

Class SRCA

Copyright by ERNI GmbH
Proprietary notice pursuant to ISO 16016 to be observed.