

# Model 4969 & 4970
# BNC (Female & Male) To
# 20 AWG Leads

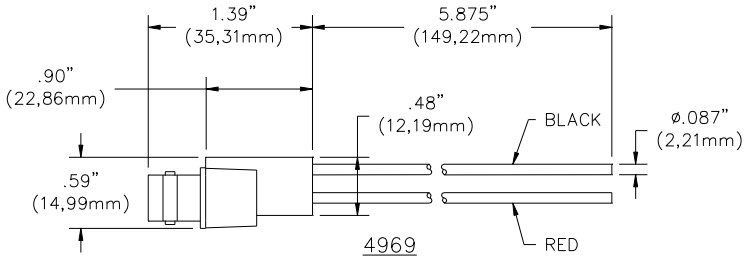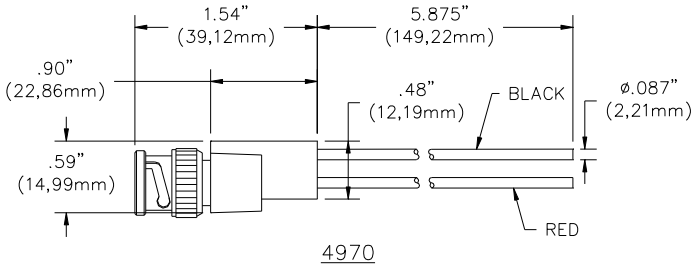


**FEATURES:**

- Breakout quickly converts a BNC cable to flying leads
- Lead ends can be attached to terminal strips or customized
- BNC connector is molded directly to the wire for pull strength durability and dust and moisture resistance
- BNC center contact is gold plated Beryllium Copper for corrosion resistance, low contact resistance and long insertion life
- Black lead is connected to BNC shell, red lead to BNC center contact

**MATERIALS:**

BNC: Nickel plated brass
Center Contact: Gold plated Beryllium Copper
Wire: 20 AWG, PVC
Marking: "POMONA 4969" or "POMONA 4970"

**RATINGS:**

Operating Voltage: 500 VRMS
Operating Temperature: +55°C (+131°F) Max.

**ORDERING INFORMATION:** Model 4969 or 4970

BNC breakouts with banana plugs, spade lugs, alligators and Minigrabber test clips are also available
*Custom lengths are available, contact Pomona Technical support: 800-241-2060 (Technicalsupport@pomonatest.com)

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (,51 mm), .xxx = ± .005" (,127 mm).
All specifications are to the latest revisions. Specifications are subject to change without notice.
Registered trademarks are the property of their respective companies.

Sales: 800-490-2361 Fax: 888-403-3360 Technical Assistance: 800-241-2060
For "Where to Buy" information, visit the Pomona web site at www.pomonaelectronics.com

Rev: 100
D1094293