



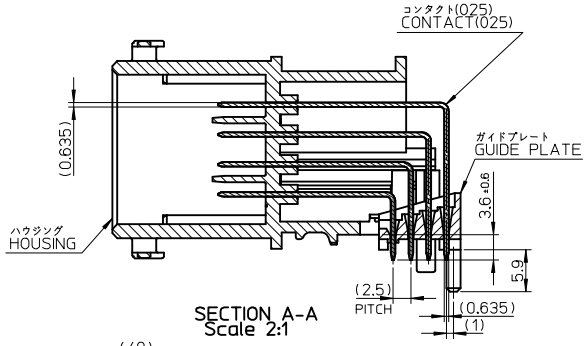


SECTION A-A
Scale 2:1

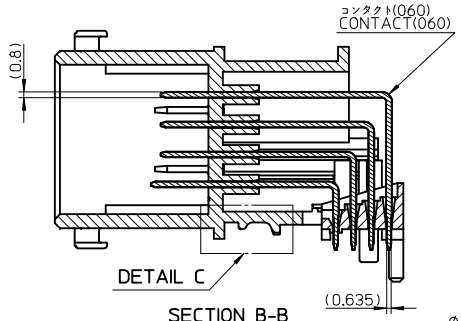



DETAIL C


SECTION B-B
Scale 2:1




DETAIL C
Scale 5:1

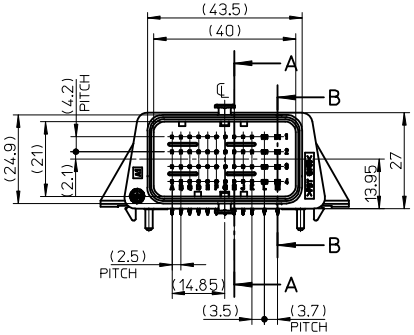










DETAIL E
Scale 5:1

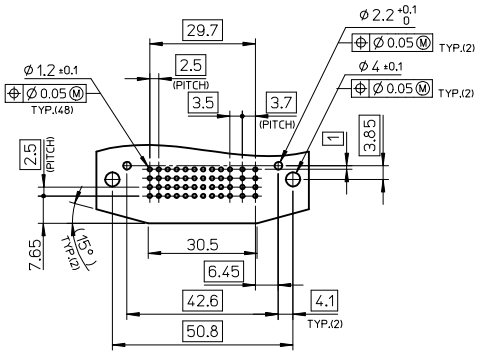

基板穴推奨寸法（部品実装面）
RECOMMENDED PCB LAYOUT (COMPONENT SIDE)






ガイドプレート位置
GUIDE PLATE POSITION


DETAIL D
Scale 5:1


注記
NOTES

1. ハウジング,ガイドプレート材料 ： PBT-GF30%（黒色）
   HOUSING,GUIDE PLATE MATERIAL : PBT-GF30%(BLACK)
2. 端子(025,060)材料 ： 銅合金
   CONTACT(025,060) MATERIAL : COPPER ALLOY
3. 端子(025,060)のめっき処理 ： 錫めっき（接点部、テール部）,下地Niめっき
   CONTACT(025,060) PLATING : Sn PLATING(CONTACT, SOLDERING AREA),OVER Ni PLATING
4. 推奨基板厚 ： 1.6±0.1mm
   RECOMMENDED P.C.B. THICKNESS : 1.6±0.1mm
5. 製品仕様書 ： PS-64319-001参照
   PRODUCT SPECIFICATION: REFER TO PS-64319-001



KEY OPTION	
BLACK	BROWN
500762-0481	500762-0483





GENERAL TOLERANCES (UNLESS SPECIFIED)	
10 UNDER	±0.2
10 OVER 30 UNDER	±0.25
30 OVER	±0.3
ANGULAR ±2 °	

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

REV	DESCRIPTION	
A	REVISED EC NO:	2014/04/30
	DRWN:KINOUE02	2013/08/29
	CHKD:SANDO	2013/08/23
	APPR:MAYAMAMOTO	

BROWN	500762-0483
BLACK	500762-0481
KEY OPTION	MATERIAL NO.

DIMENSION STYLE: MM ONLY	SCALE: 1:1	DESIGN UNITS: METRIC	THIRD ANGLE PROJECTION
DRAWN BY: H.TANAKA DATE: 2006/5/22	TITLE: CMC HEADER 48PIN		
CHECKED BY: MA.YAMAMOTO DATE: 2006/5/22			
APPROVED BY: A.KANESHIGE DATE: 2006/5/22	molex		
MATERIAL NO.: SEE TABLE	DOCUMENT NO.: SD-500762-001	SHEET NO.: 1 OF 1	

SIZE A2

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION