




MP6P6C

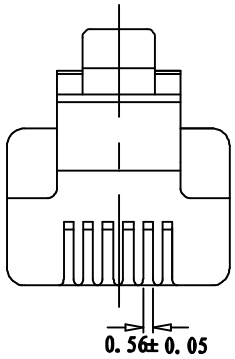

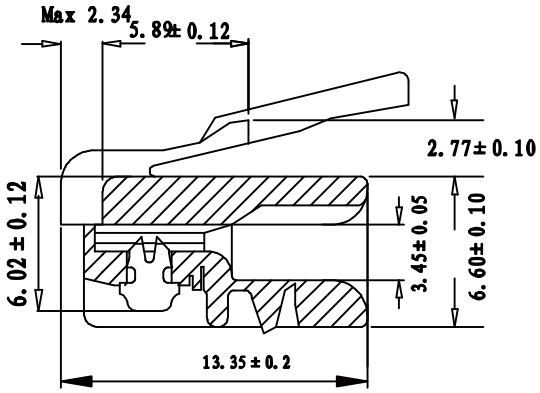

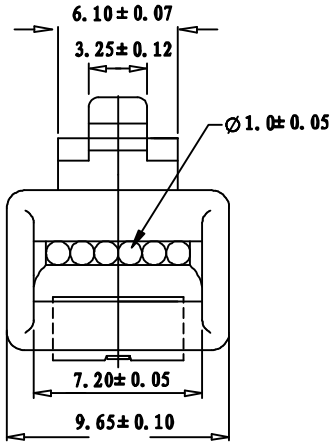

SPECIFICATIONS

HOUSING	POLY CARBONATE(PC) UL94V2 NO. E919153
CONTACT BLADE	HIGH STRENGTH COPPER ALLLOY
MATERIAL	100 MICRON NICKEL UCNDERPLATED
PLATING TYPE	8% PHOSPHOR BRONZE
PLATING THICKNESS:	GOLD PLATED FU"
OPERATING TEMP	-40° C TO 125° C
CURRENT RATING	250V AC MAX AT 2A
DIELECTRIC	500V AC
INSULATION RES	500MEGAOHMS
COMPLIES WITH FCC68/F	

"RoHS Compliance"

REVISE	VERSION	LT#	CONTENTS
12-02-23	A/0	T0222B	NEW DRAWING

CnC Tech, LLC

Industrial Cable and Connector Technology

REV.NO: ISSUE (A/0)		CUSTOMER:L-671
DRAWING NO: 671-362-FU-001		PART NO: 5010-FU0066-001
ITEM NO: MP6P6C PLUG(F)		
UNIT:MM | DRAWN:	ENGINEER:	SALES DEPT:
DATE:12-02-23	QA:	SALES MANAGER: