

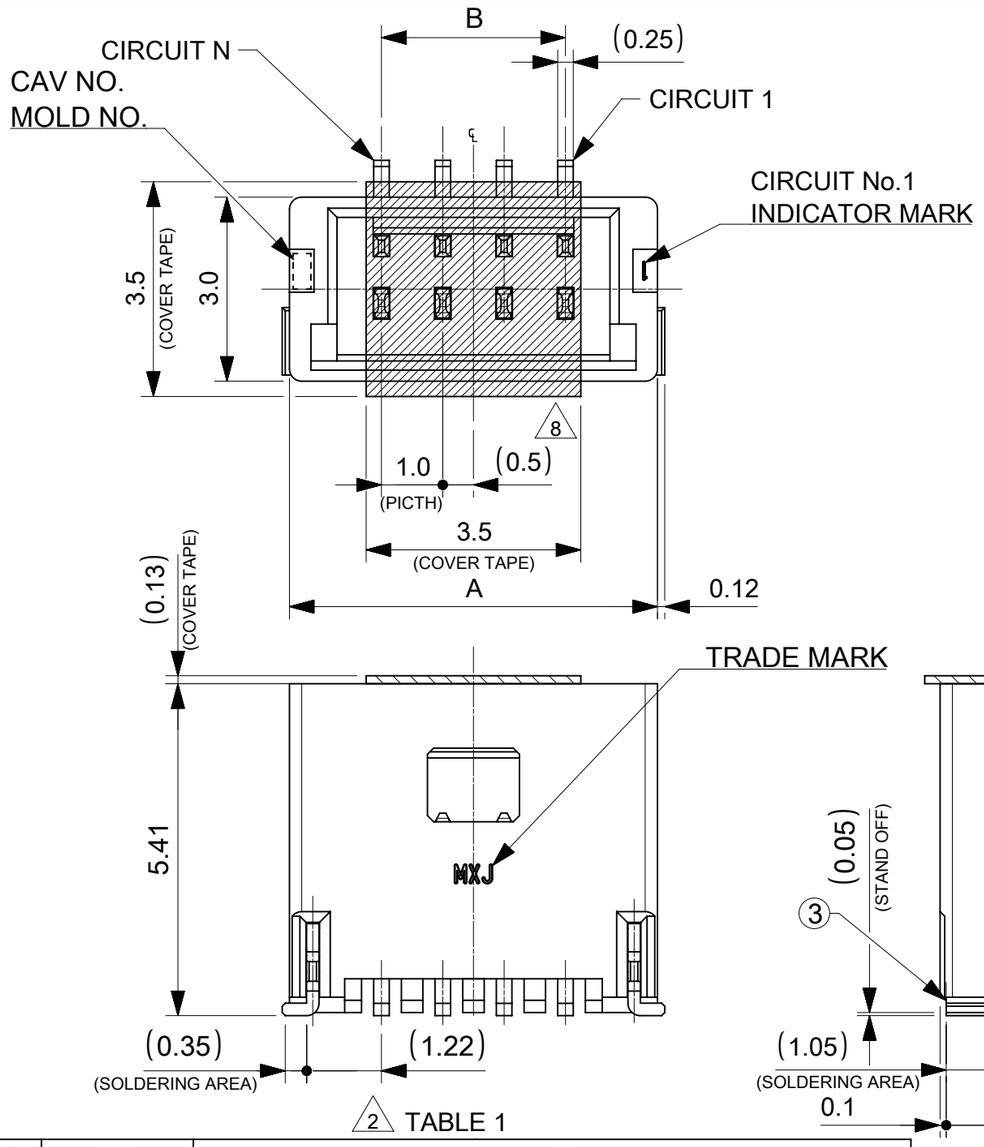


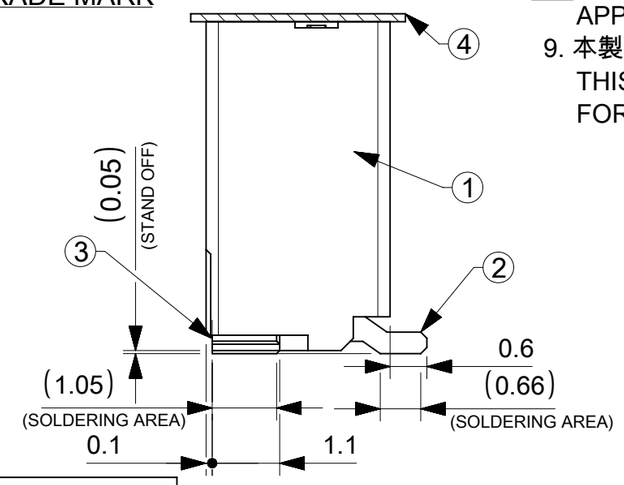

2 TABLE 1

番号 NO.	部品 PART	材質 MATERIAL	
①	ウエハー WAFER	ポリアミド(PA), UL94V-0, 色：SEE SHEET 6 POLYAMIDE(PA), UL94V-0, COLOR : SEE SHEET 6	
②	ソルダーピン SOLDER PIN	リン青銅 PHOSPHOR BRONZE	
		接点部 CONTACT AREA	錫めっき： 1.0 MICRO-METER MIN. MATTE TIN PLATING
		テール部 TAIL AREA	錫めっき： 1.0 MICRO-METER MIN. MATTE TIN PLATING
		下地めっき UNDER PLATING	ニッケルめっき：1.0 MICRO-METER MIN. NICKEL
③	ネイル NAIL	リン青銅 PHOSPHOR BRONZE	
		テール部 TAIL AREA	錫めっき： 1.0 MICRO-METER MIN. MATTE TIN PLATING
		下地めっき UNDER PLATING	ニッケルめっき：1.0 MICRO-METER MIN. NICKEL
④	カバーテープ COVER TAPE	ポリイミドテープ POLYIMIDE TAPE	

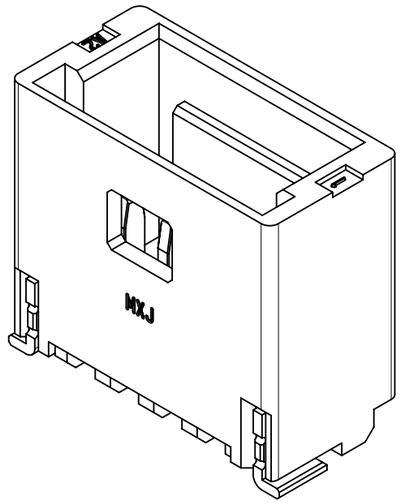

NOTES

1. 本製品は極数によって、ロック形状が変わりますので御注意願います。
   THE LOCK SHAPE OF THIS PRODUCT CHANGES ACCORDING TO THE NUMBER OF CIRCUIT.
   2~5 CIRCUITS：フリクションロック FRICTION LOCK
   6~15 CIRCUITS：インナーポジティブロック INNER POSITIVE LOCK
2. 材料及び仕上げ(めっき仕様)：TABLE 1,2 参照
   MATERIAL AND FINISHES : SEE TABLE 1 AND 2
3. 製品仕様書：5013300000-PS 001
   PRODUCT SPECIFICATION:
4. 梱包形態：SEE SHEET 4
   PACKAGING INFORMATION:
5. 嵌合相手：501330 シリーズ
   MATES WITH:501330 SERIES
6. アプリケーション仕様書(コネクタ取扱い説明書)：5013300000-AS A00(JAPANESE)/-A01(ENGLISH)
   APPLICATION SPECIFICATION(CONNECTOR MANUAL):
7. ソルダーピン及びネイルの平坦度:0.1 MAX.
   SOLDER PIN AND NAIL COPLANARITY: 0.1 MAX.
8. 偶数極に適応
   APPLY FOR EVEN CIRCUIT
9. 本製品は錫めっき品である。金めっき品は以下の図面を御参照下さい。
   THIS PRODUCT IS A TIN PLATING. PLEASE REFER TO THE FOLLOWING DRAWING FOR GOLD PLATING VERSION.

GOLD PLATING THICKNESS [micro-meter MIN.]	SERIES No.	DRAWING No.
0.1	504449	5044490000-SD PSD 000
0.38	203556	2035560000-SD PSD 000
0.76	203557	2035570000-SD PSD 000

4.0	7.0	5
3.0	6.0	4
2.0	5.0	3
1.0	4.0	2
B	A	極数 CIRCUIT SIZE

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

DIMENSION UNITS	mm
SCALE	NTS
GENERAL TOLERANCES (UNLESS SPECIFIED)	
ANGULAR TOL ±	3.0 °
4 PLACES ±	0.2
3 PLACES ±	0.2
2 PLACES ±	0.2
1 PLACE ±	0.2
0 PLACES ±	0.2
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	

CURRENT REV DESC:

EC NO: 614886
DRWN: AISHIKAWA 2019/02/18
CHK'D: AIDA 2019/04/03
APPR: KOMURAKAMI 2019/04/05

INITIAL REVISION:
DRWN: AISHIKAWA 2019/02/18
APPR: KOMURAKAMI 2019/04/05

molex

PICO-CLASP 1.0 W/B
SINGLE ROW VT SMT INNER LOCK TIN PLATING


PRODUCT CUSTOMER DRAWING


DOCUMENT NUMBER	DOC TYPE	DOC PART	REVISION
5013310000-SD	PSD	000	A


THIRD ANGLE PROJECTION	DRAWING	SERIES	MATERIAL NUMBER	CUSTOMER	SHEET NUMBER
	A3-SIZE	501331	SEE SHEET 6		1 OF 6

DOCUMENT STATUS	P1	RELEASE DATE	2019/04/05 01:07:45

FORMAT: tb-prod-A3
REVISION: H
DATE: 2018/01/18

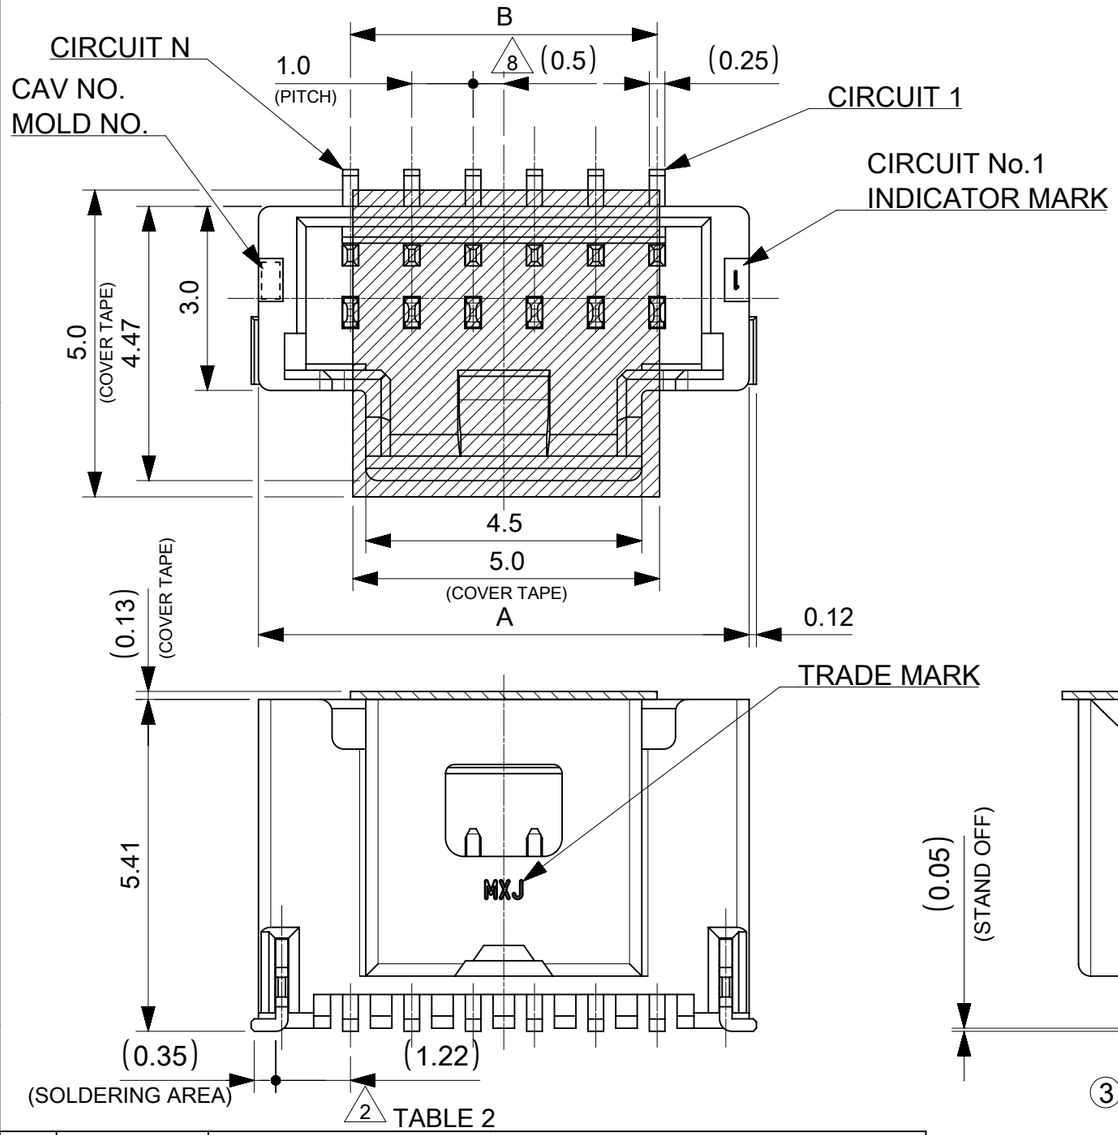

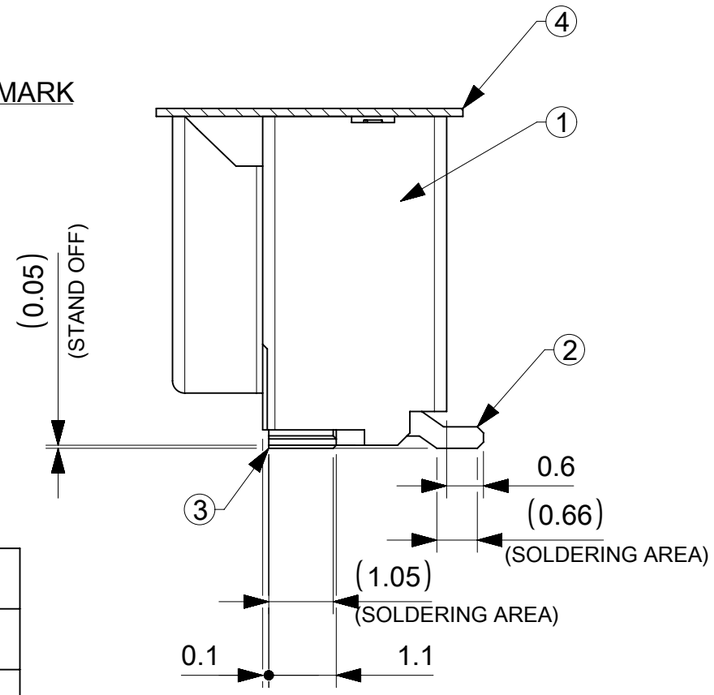

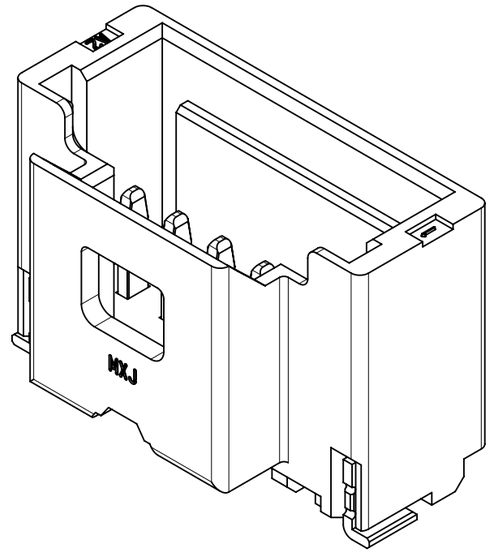

番号 NO.	部品 PART	材質 MATERIAL	
①	ウエハー WAFER	ポリアミド(PA), UL94V-0, 色 : SEE SHEET 6 POLYAMIDE(PA), UL94V-0, COLOR : SEE SHEET 6	
②	ソルダーピン SOLDER PIN	リン青銅 PHOSPHOR BRONZE	
		接点部 CONTACT AREA	錫めっき： 1.0 MICRO-METER MIN. MATTE TIN PLATING
		テール部 TAIL AREA	錫めっき： 1.0 MICRO-METER MIN. MATTE TIN PLATING
		下地めっき UNDER PLATING	ニッケルめっき：1.0 MICRO-METER MIN. NICKEL
③	ネイル NAIL	リン青銅 PHOSPHOR BRONZE	
		テール部 TAIL AREA	錫めっき： 1.0 MICRO-METER MIN. MATTE TIN PLATING
		下地めっき UNDER PLATING	ニッケルめっき：1.0 MICRO-METER MIN. NICKEL
④	カバーテープ COVER TAPE	ポリイミドテープ POLYIMIDE TAPE	

14.0	17.0	15
13.0	16.0	14
12.0	15.0	13
11.0	14.0	12
10.0	13.0	11
9.0	12.0	10
8.0	11.0	9
7.0	10.0	8
6.0	9.0	7
5.0	8.0	6
B	A	極数 CIRCUIT SIZE

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

DIMENSION UNITS: mm | SCALE: NTS

GENERAL TOLERANCES (UNLESS SPECIFIED)

ANGULAR TOL	±	3.0 °
4 PLACES	±	0.2
3 PLACES	±	0.2
2 PLACES	±	0.2
1 PLACE	±	0.2
0 PLACES	±	0.2

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

CURRENT REV DESC:

EC NO: 614886
DRWN: AISHIKAWA 2019/02/18
CHK'D: AIDA 2019/04/03
APPR: KOMURAKAMI 2019/04/05

INITIAL REVISION:
DRWN: AISHIKAWA 2019/02/18
APPR: KOMURAKAMI 2019/04/05

molex

PICO-CLASP 1.0 W/B
SINGLE ROW VT SMT INNER LOCK TIN PLATING


PRODUCT CUSTOMER DRAWING

DOCUMENT NUMBER	DOC TYPE	DOC PART	REVISION
5013310000-SD	PSD	000	A


THIRD ANGLE PROJECTION | DRAWING: A3-SIZE | SERIES: 501331 | MATERIAL NUMBER: SEE SHEET 6 | CUSTOMER | SHEET NUMBER: 2 OF 6

DOCUMENT STATUS	P1	RELEASE DATE	2019/04/05 01:07:45

FORMAT: master-lb-prod-A3
REVISION: H
DATE: 2018/01/18

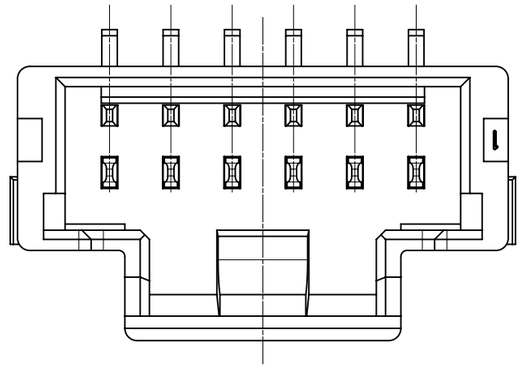

製品レイアウト(参考：6~15 CIRCUITS)
PRODUCT LAYOUT(REFERENCE: 6~15 CIRCUITS)

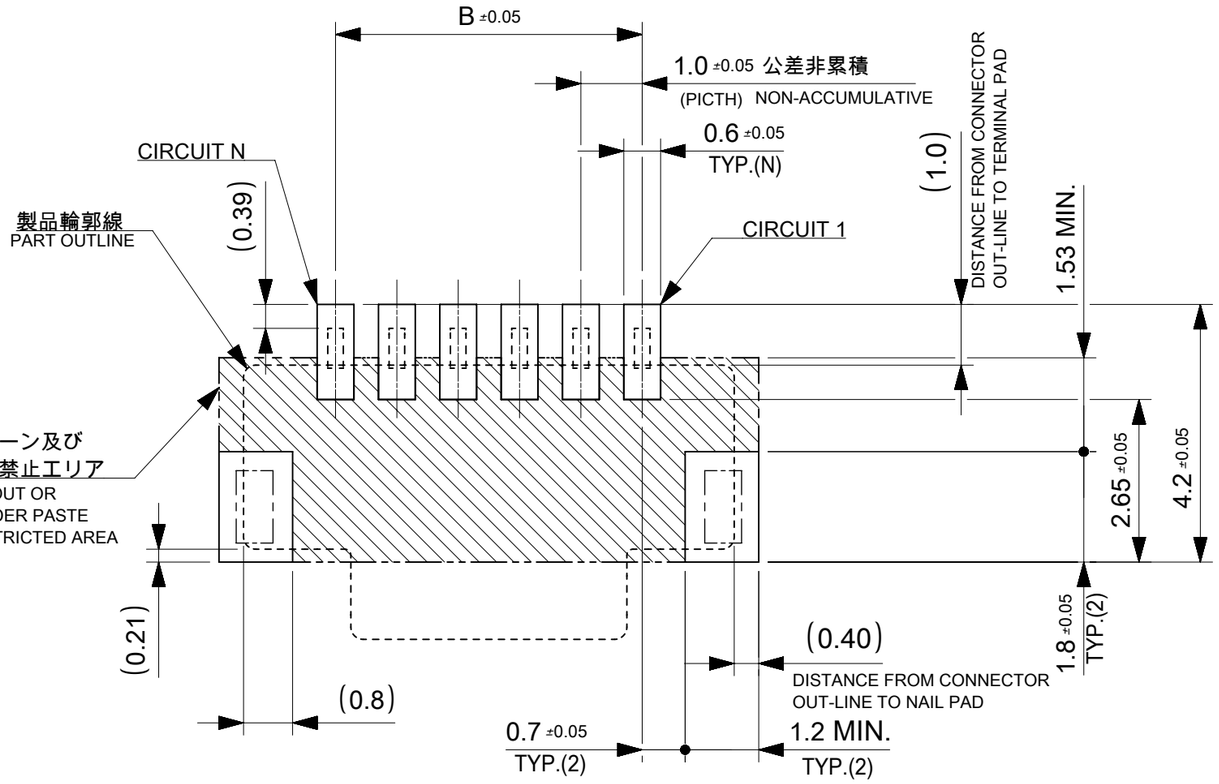


推奨基板レイアウト(全極数適応)：実装面側
(参考：基板厚 1.0mm, メタルマスク厚さ 0.12mm, マスク開口率100%)


POLARIZED RECOMMENDED PCB LAYOUT(APPLY TO ALL CIRCUIT) : COMPONENT SIDE
(REFERENCE: PCB THICKNESS 1.0mm, STENCIL THICKNESS 0.12mmm, APERTURE RATIO 100%)

:パターン禁止エリア
RESTRICTED AREA
NO PCB COMPONENTS ALLOWED

△5 嵌合相手：501330 シリーズ
MATE WITH : 501330 SERIES

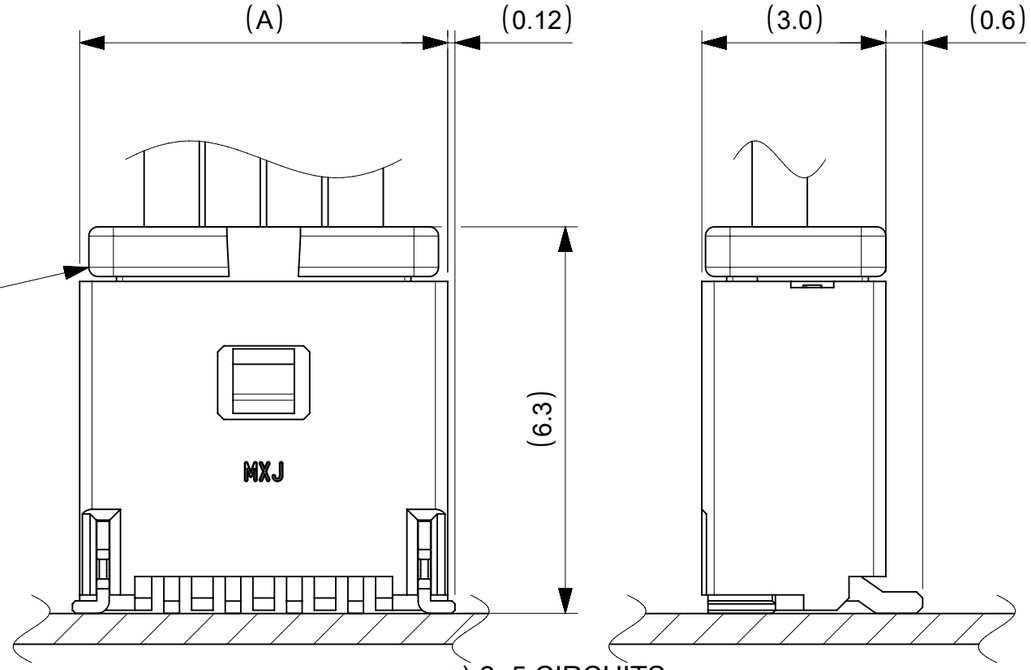

a) 2~5 CIRCUITS

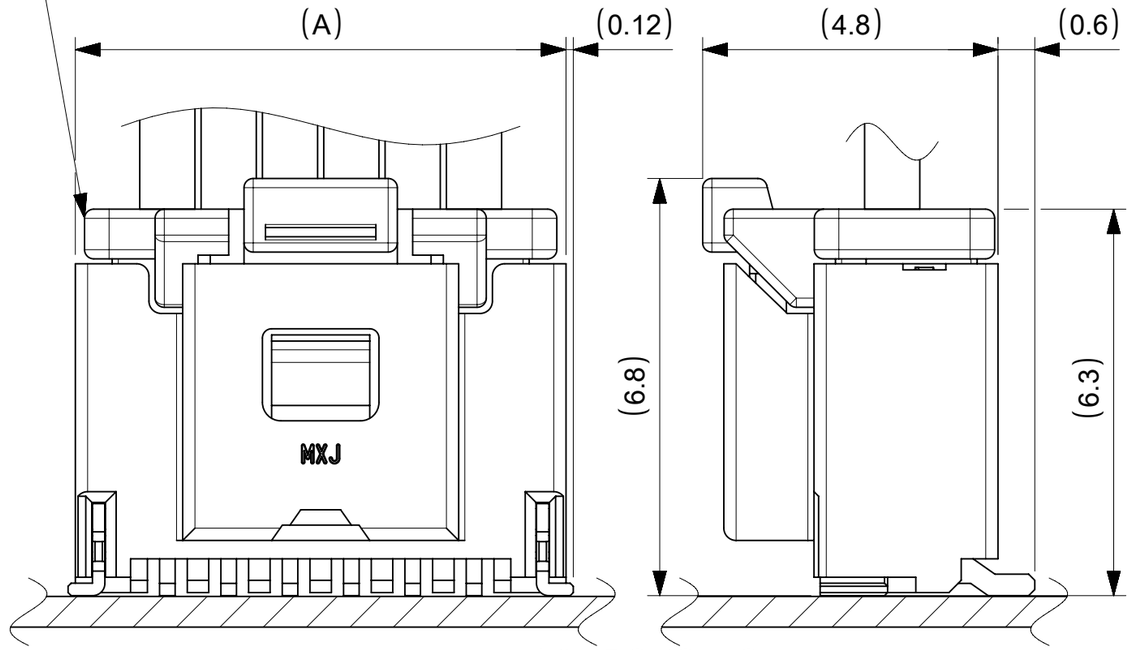

b) 6~15 CIRCUITS

嵌合図
MATED CONNECTORS

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

DIMENSION UNITS	mm
SCALE	NTS
GENERAL TOLERANCES (UNLESS SPECIFIED)	
ANGULAR TOL	± 3.0 °
4 PLACES	± 0.2
3 PLACES	± 0.2
2 PLACES	± 0.2
1 PLACE	± 0.2
0 PLACES	± 0.2
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	

CURRENT REV DESC:

EC NO: 614886
DRWN: AISHIKAWA 2019/02/18
CHK'D: AIDA 2019/04/03
APPR: KOMURAKAMI 2019/04/05

INITIAL REVISION:
DRWN: AISHIKAWA 2019/02/18
APPR: KOMURAKAMI 2019/04/05

molex

PICO-CLASP 1.0 W/B
SINGLE ROW VT SMT INNER LOCK TIN PLATING


PRODUCT CUSTOMER DRAWING


DOCUMENT NUMBER	DOC TYPE	DOC PART	REVISION
5013310000-SD	PSD	000	A

THIRD ANGLE PROJECTION	DRAWING	SERIES	MATERIAL NUMBER	CUSTOMER	SHEET NUMBER
	A3-SIZE	501331	SEE SHEET 6		3 OF 6

DOCUMENT STATUS	P1	RELEASE DATE	2019/04/05 01:07:45

FORMAT: master-lb-prod-A3
REVISION: H
DATE: 2018/01/18

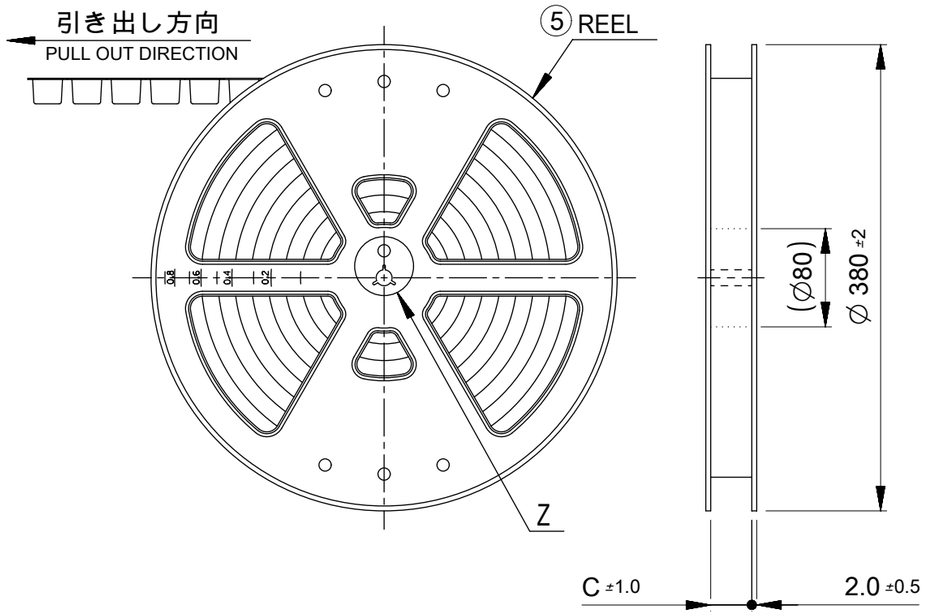


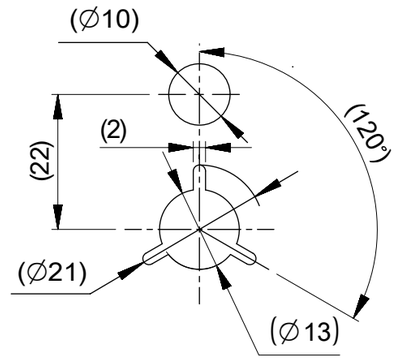

DETAIL Z

NOTES

10. 梱包数量:1100個/リール
    NUMBER OF CONNECTORS : 1100 PIECES/REEL
11. リードテープ長さ
    LEAD TAPE LENGTH

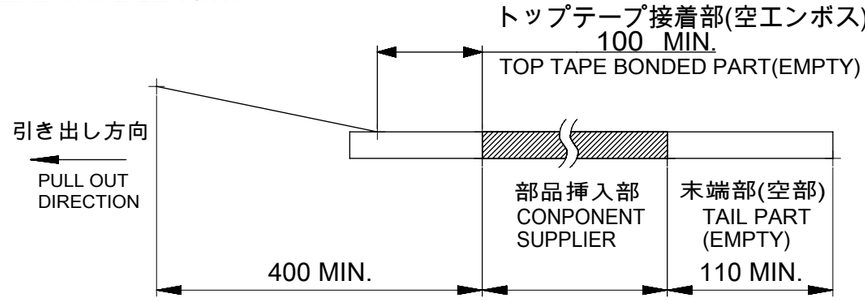

12. トップテープの剥離強度はIEC60286-3に準拠。
    TOP TAPE PEELING FORCE IS DEFINED BY IEC60286-3.
△13 2~5極品は乾燥剤入り、ハイバリア梱包による納品となります。
    2~5 CIRCUITS IS DELIVERED IN A HIGH BARIER PACKAGE WITH DESOCCANT.
14. 梱包仕様書：SPK-501331-001
    PACKAGE SPECIFICATION:
△15 発注番号：SHEET 6 参照
    ORDER No.：PLEASE REFER TO SHEET 6 FOR PRODUCT LIST.

501331 ** * *

極数 CIRCUIT SIZE	ハウジングカラー HOUSING COLOR	製品識別番号 IDENTIFICATION NUMBER
	0:NATURAL(BEIGE)	7:EMBOSSED PACKAGE

33.4	15
	14
	13
25.4	12
	11
	10
	9
	8
	7
	6
17.5	5
	4
	3
	2
C	極数 CIRCUIT SIZE

番号 NO.	部品 PART	材質 MATERIAL
⑤	リール REEL	ポリスチレン(PS) <リサイクル材を含む> POLYSTYRENE(PS) <RECYCLE MATERIAL CONTAINED>

DOCUMENT STATUS | P1 | RELEASE DATE | 2019/04/05 01:07:45

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

DIMENSION UNITS	SCALE
mm	NTS

GENERAL TOLERANCES (UNLESS SPECIFIED)

ANGULAR TOL	±	3.0 °
4 PLACES	±	0.2
3 PLACES	±	0.2
2 PLACES	±	0.2
1 PLACE	±	0.2
0 PLACES	±	0.2

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

CURRENT REV DESC:

EC NO: 614886
DRWN: AISHIKAWA 2019/02/18
CHK'D: AIDA 2019/04/03
APPR: KOMURAKAMI 2019/04/05

INITIAL REVISION:
DRWN: AISHIKAWA 2019/02/18
APPR: KOMURAKAMI 2019/04/05

THIRD ANGLE PROJECTION | DRAWING: A3-SIZE | SERIES: 501331

molex

PICO-CLASP 1.0 W/B
SINGLE ROW VT SMT INNER LOCK TIN PLATING

PRODUCT CUSTOMER DRAWING


DOCUMENT NUMBER	DOC TYPE	DOC PART	REVISION
5013310000-SD	PSD	000	A

MATERIAL NUMBER	CUSTOMER	SHEET NUMBER
SEE SHEET 6		4 OF 6


FORMAT: master-tb-prod-A3
REVISION: H
DATE: 2018/01/18


引き出し方向
PULL OUT DIRECTION

2~5 CIRCUITS




SECTION Y-Y

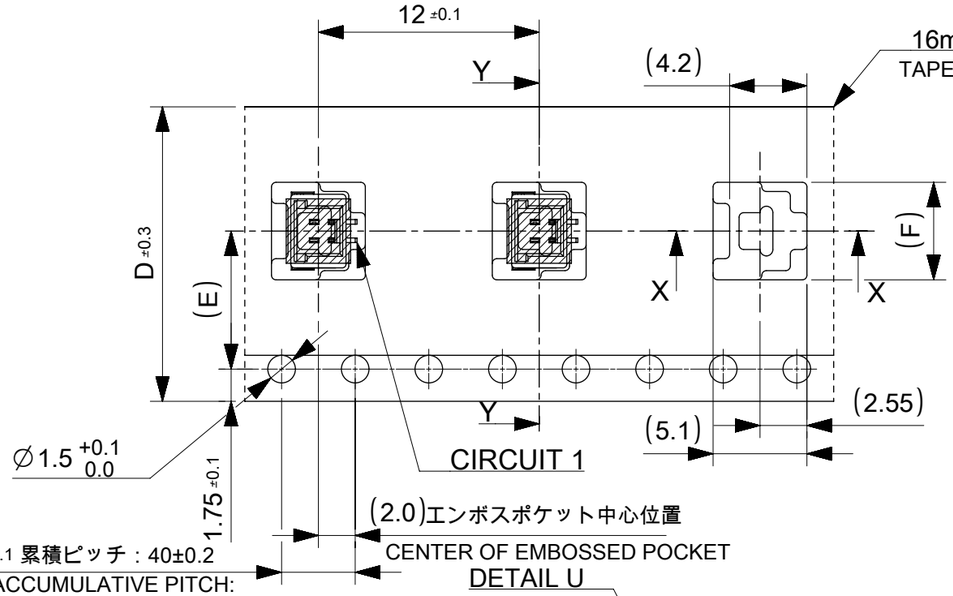


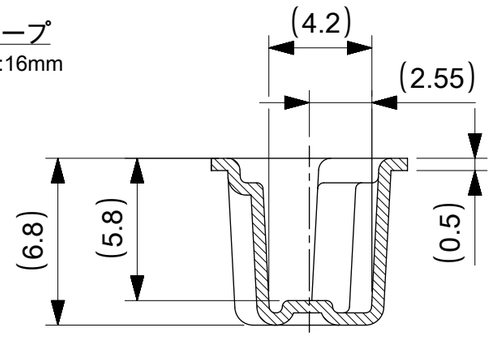

SECTION X-X

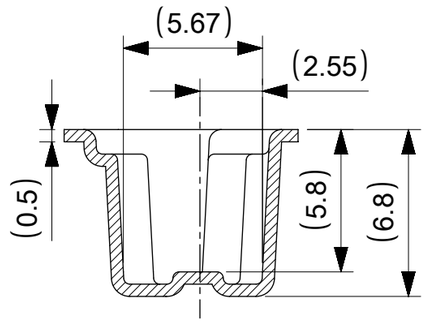



SECTION V-V

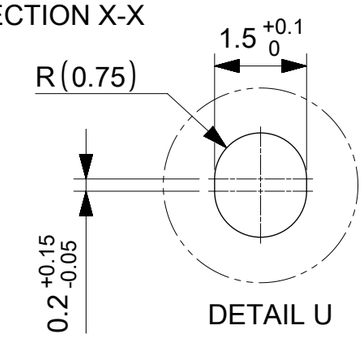

DETAIL U

6~15 CIRCUITS

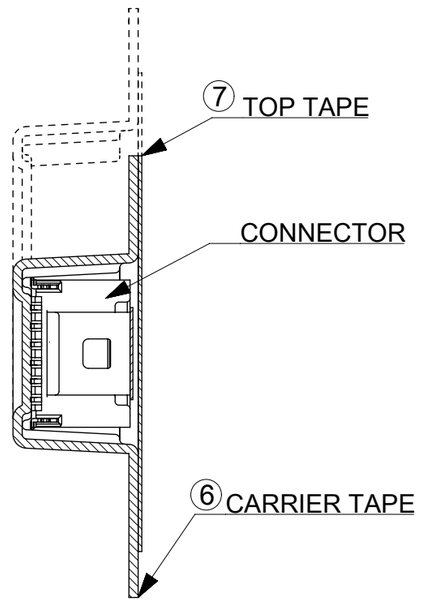

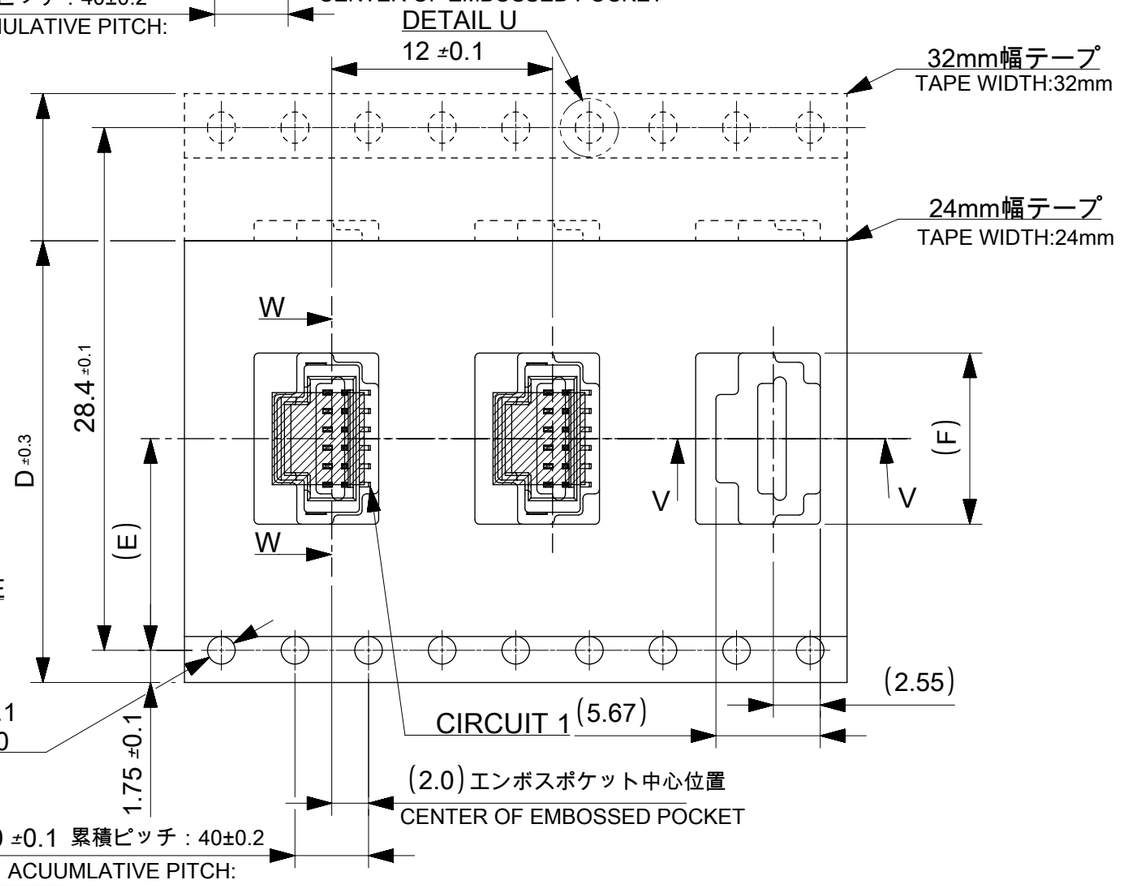

SECTION W-W

番号 NO.	部品 PART	材質 MATERIAL
⑥	キャリアテープ CARRIER TAPE	ポリプロピレン(PP)、その他 POLYPROPYLEN(PP), etc
⑦	トップテープ TOP TAPE	ポリエチレン(PE)、その他 POLYETHYLENE(PE), etc

DOCUMENT STATUS	P1	RELEASE DATE	2019/04/05 01:07:45

18.3	14.2	32	15
17.3			14
16.3			13
15.3	11.5	24	12
14.3			11
13.3			10
12.3			9
11.3			8
10.3			7
9.3			6
8.3	7.5	16	5
7.3			4
6.3			3
5.3			2
F	コネクタ中心位置 E SENTER OF CONNECTOR	エンボステープ幅 D WIDTH OF TAPE	極数 CIRCUIT SIZE

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

DIMENSION UNITS: mm
SCALE: NTS
GENERAL TOLERANCES (UNLESS SPECIFIED)
ANGULAR TOL ± 3.0 °
4 PLACES ± 0.2
3 PLACES ± 0.2
2 PLACES ± 0.2
1 PLACE ± 0.2
0 PLACES ± 0.2
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

CURRENT REV DESC:
EC NO: 614886
DRWN: AISHIKAWA 2019/02/18
CHK'D: AIDA 2019/04/03
APPR: KOMURAKAMI 2019/04/05
INITIAL REVISION:
DRWN: AISHIKAWA 2019/02/18
APPR: KOMURAKAMI 2019/04/05

THIRD ANGLE PROJECTION
DRAWING: A3-SIZE
SERIES: 501331

molex

PICO-CLASP 1.0 W/B
SINGLE ROW VT SMT INNER LOCK TIN PLATING

PRODUCT CUSTOMER DRAWING

DOCUMENT NUMBER	DOC TYPE	DOC PART	REVISION
5013310000-SD	PSD	000	A

MATERIAL NUMBER: SEE SHEET 6
CUSTOMER:
SHEET NUMBER: 5 OF 6

FORMAT: master-tb-prod-A3
REVISION: H
DATE: 2018/01/18

△13 △15 製品一覧 PRODUCT LIST

HOUSING COLOR	
NATURAL(BEIGE)	
501331 1507	15
△ 1407	14
1307	13
1207	12
1107	11
1007	10
0907	9
0807	8
0707	7
0607	6
0507	5
0407	4
▽ 0307	3
501331 0207	2
発注番号 ORDER No.	極数 CIRCUIT SIZE
梱包形態：エンボスリール PACKAGE:EMBOSSED REEL	

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

DIMENSION UNITS	SCALE
mm	NTS

GENERAL TOLERANCES (UNLESS SPECIFIED)	
ANGULAR TOL	± 3.0 °
4 PLACES	± 0.2
3 PLACES	± 0.2
2 PLACES	± 0.2
1 PLACE	± 0.2
0 PLACES	± 0.2

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

CURRENT REV DESC:

EC NO: 614886
DRWN: AISHIKAWA 2019/02/18
CHK'D: AIDA 2019/04/03
APPR: KOMURAKAMI 2019/04/05

INITIAL REVISION:
DRWN: AISHIKAWA 2019/02/18
APPR: KOMURAKAMI 2019/04/05

molex

PICO-CLASP 1.0 W/B
SINGLE ROW VT SMT INNER LOCK TIN PLATING

PRODUCT CUSTOMER DRAWING


DOCUMENT NUMBER	DOC TYPE	DOC PART	REVISION
5013310000-SD	PSD	000	A


THIRD ANGLE PROJECTION	DRAWING	SERIES	MATERIAL NUMBER	CUSTOMER	SHEET NUMBER
	A3-SIZE	501331	SEE SHEET 6		6 OF 6

DOCUMENT STATUS	P1	RELEASE DATE	2019/04/05 01:07:45

FORMAT: master-tb-prod-A3
REVISION: H
DATE: 2018/01/18

CONFIDENTIAL

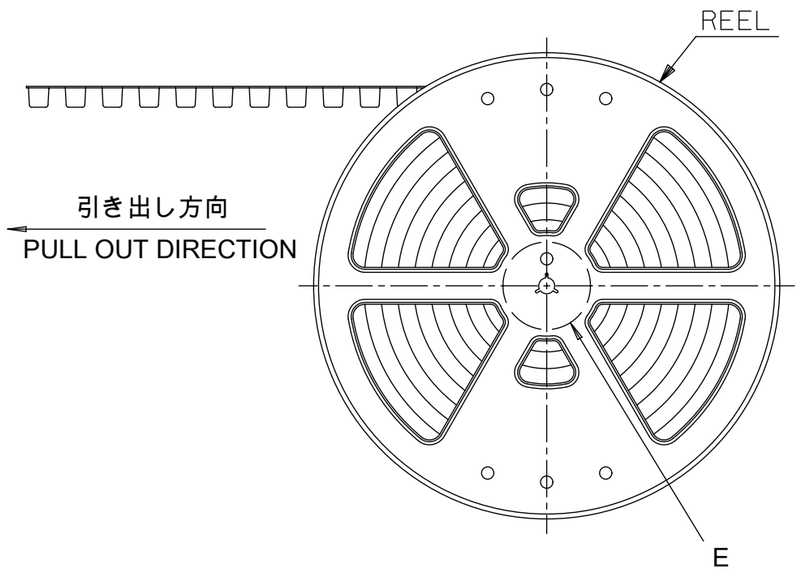

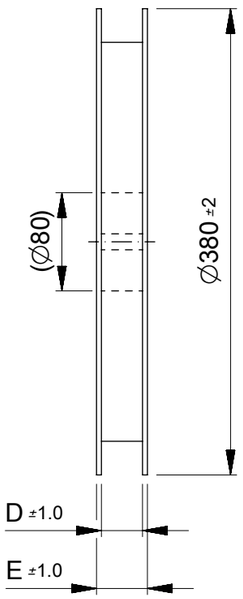


NOTES.


1．製品詳細寸法については製品単体図面を参照ください.
ABOUT DETAILED DIMENSION, SEE PRODUCT DRAWING.

2．梱包数量：１１００個 / リール
NUMBER OF CONNECTORS : 1100PIECES/REEL

3．リードテープ長さ
LEAD TAPE LENGTH

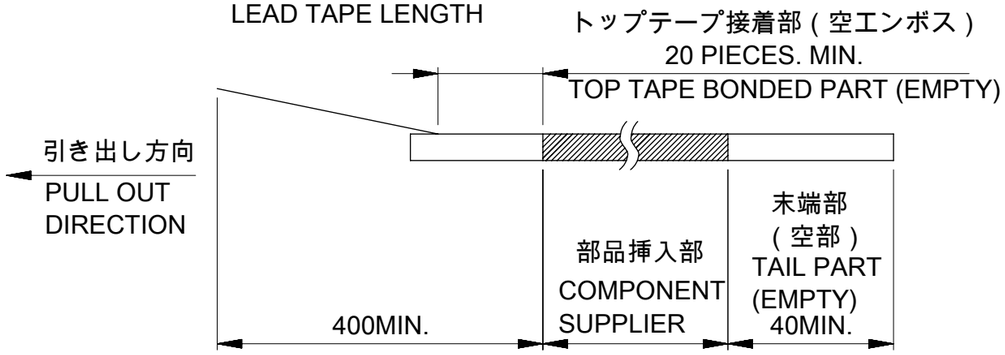

4．材料
MATERIAL
キャリアテープ：ポリプロピレン
CARRIER TAPE : POLYPROPYLENE
トップテープ：ＰＥＴ,ＰＥ,ＲＥＦ
TOP TAPE
リール：ポリスチレン（リサイクル材を含む）
REEL : POLYSTYLENE (RECYCLE MATERIAL CONTAINED)

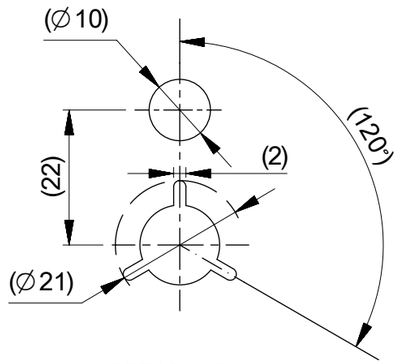

DETAIL "E"

緑 GREEN	青 BLUE	赤 RED	黒 BLACK	自然色 NATURAL	色 COLOR
5013311562	5013311542	5013311522	5013311512	501331 1507	15
5013311462	5013311442	5013311422	5013311412	501331 1407	14
5013311362	5013311342	5013311322	5013311312	501331 1307	13
5013311262	5013311242	5013311222	5013311212	501331 1207	12
5013311162	5013311142	5013311122	5013311112	501331 1107	11
5013311062	5013311042	5013311022	5013311012	501331 1007	10
5013310962	5013310942	5013310922	5013310912	501331 0907	9
5013310862	5013310842	5013310822	5013310812	501331 0807	8
5013310762	5013310742	5013310722	5013310712	501331 0707	7
5013310662	5013310642	5013310622	5013310612	501331 0607	6
EMBOSSED PACKAGE	EMBOSSED PACKAGE	EMBOSSED PACKAGE	EMBOSSED PACKAGE	EMBOSSED PACKAGE	極数 CIRCUTIS
△10 オーダー番号 ORDER NO.	△10 オーダー番号 ORDER NO.	△10 オーダー番号 ORDER NO.	△10 オーダー番号 ORDER NO.	△10 オーダー番号 ORDER NO.	

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

RELEASED
EC NO: 120301 2017/08/03
DRWN: QHE31 2017/08/04
CHK'D: SAKIYAMA 2017/08/04
APPR: TKANEKO

GENERAL TOLERANCES (UNLESS SPECIFIED)
ANGULAR TOL ± 3.0 °
4 PLACES ± 0.2
3 PLACES ± 0.2
2 PLACES ± 0.2
1 PLACE ± 0.2
0 PLACES ± 0.2
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

REV A

DIMENSION UNITS: MM
SCALE: ⧺
DRWN BY: QHE31 DATE: 2017/08/03
CHK'D BY: SAKIYAMA DATE: 2017/08/04
APPR BY: TKANEKO DATE: 2017/08/04
DRAWING SIZE: A3
THIRD ANGLE PROJECTION

molex®

PICO-CLASP 1.0 W/B SINGLE-ROW ST EMBSTP PKG WAFER ASS'Y

PRODUCT CUSTOMER DRAWING


SERIES	MATERIAL NUMBER	CUSTOMER
501331	SEE TABLE OF SHEET 1	


DOCUMENT NUMBER	DOC TYPE	DOC PART	SHEET NUMBER
5013310612-SD	PSD	000	1 OF 3

RELEASE STATUS	P1	RELEASE DATE	04.08.2017 10:10:40

FORMAT: tb-prod-A3
REVISION: G
DATE: 2017/02/06

CONFIDENTIAL

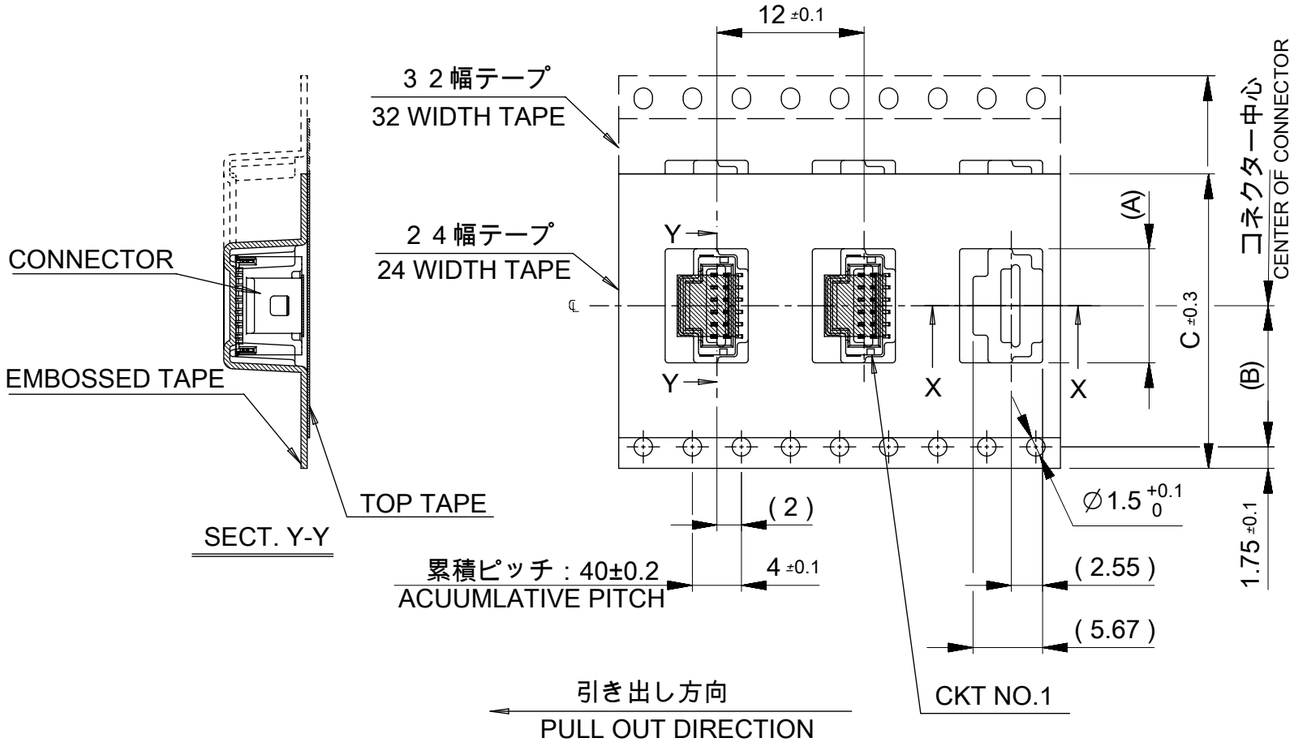

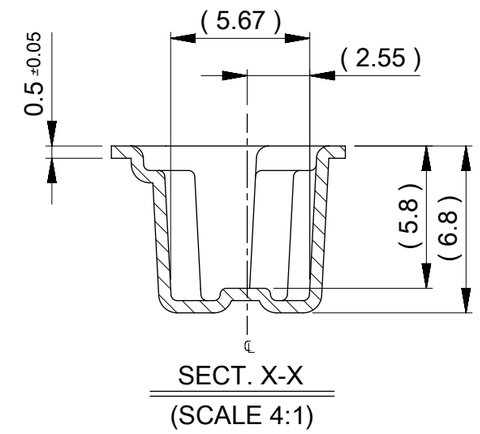

37.4	33.4	32	14.2	18.3	15
				17.3	14
				16.3	13
29.4	25.4	24	11.5	15.3	12
				14.3	11
				13.3	10
				12.3	9
				11.3	8
				10.3	7
				9.3	6
E	D	C	(B)	(A)	極数 CIRCUITS

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

RELEASED
EC NO: 120301 2017/08/03
DRWN: QHE31 2017/08/04
CHK'D: SAKIYAMA 2017/08/04
APPR: TKANEKO

GENERAL TOLERANCES (UNLESS SPECIFIED)		
ANGULAR TOL ±	3.0	°
4 PLACES	±	0.2
3 PLACES	±	0.2
2 PLACES	±	0.2
1 PLACE	±	0.2
0 PLACES	±	0.2

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

REV
A

DIMENSION UNITS: MM
SCALE: 1:1
DRWN BY: QHE31 DATE: 2017/08/03
CHK'D BY: SAKIYAMA DATE: 2017/08/04
APPR BY: TKANEKO DATE: 2017/08/04
DRAWING SIZE: A3
THIRD ANGLE PROJECTION

molex®

PICO-CLASP 1.0 W/B SINGLE-ROW ST EMBSTP PKG WAFER ASS'Y

PRODUCT CUSTOMER DRAWING


SERIES	MATERIAL NUMBER	CUSTOMER
501331	SEE TABLE OF SHEET 1	


DOCUMENT NUMBER	DOC TYPE	DOC PART	SHEET NUMBER
5013310612-SD	PSD	000	2 OF 3

RELEASE STATUS	P1	RELEASE DATE	04.08.2017 10:10:40


FORMAT: master-tb-prod-A3
REVISION: G
DATE: 2017/02/06


CONFIDENTIAL

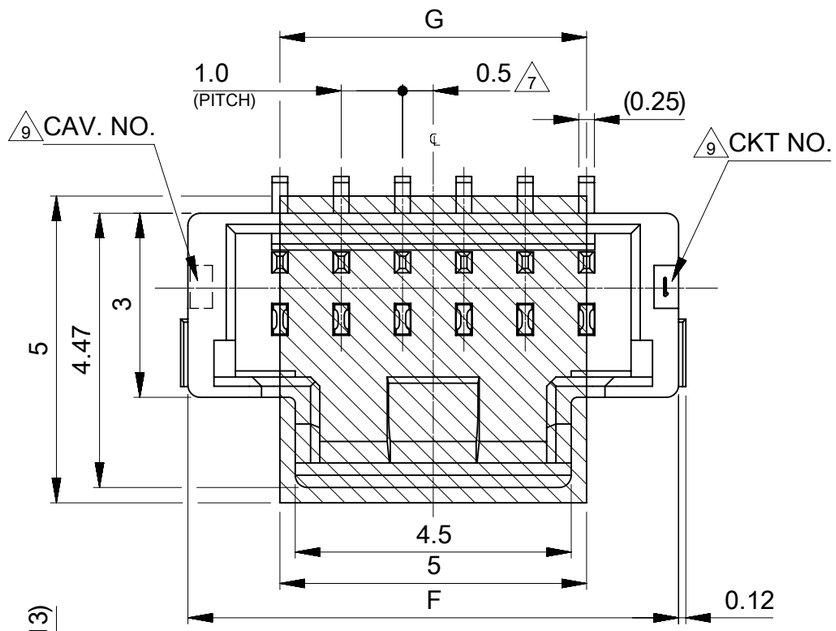

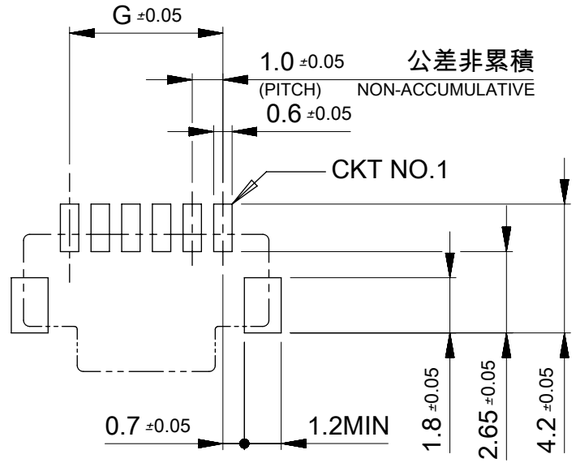

参考パターンレイアウト
RECCOMENDED PATTERN DIM. (REF)
SCALE:5:1

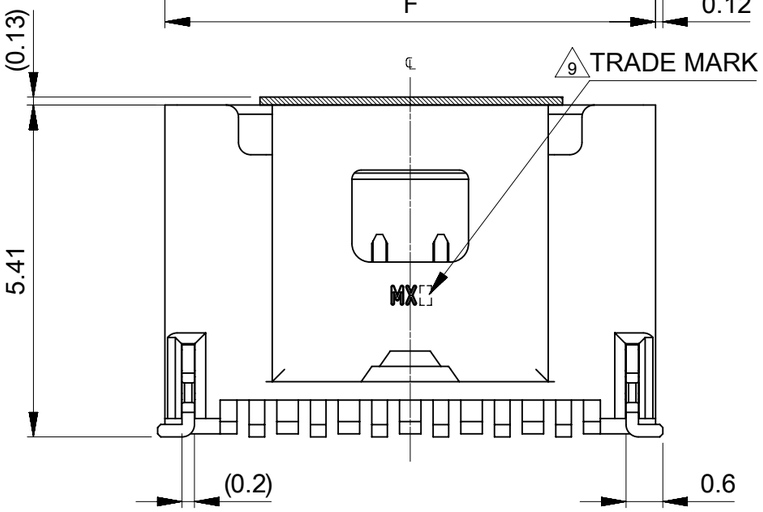

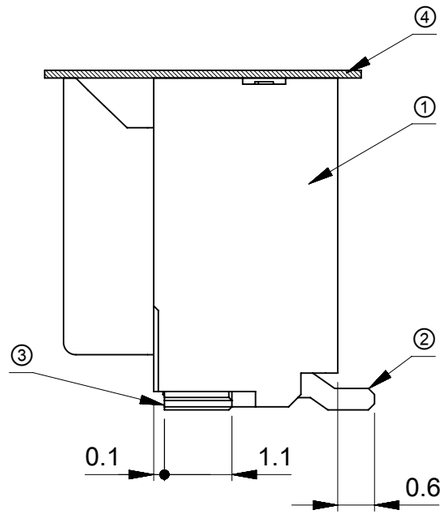

番号 NO.	部品 PART	材質 MATERIAL
①	ウエハー WAFER	10 耐熱ナイロン樹脂 ,色：表参照 HEAT RESISTANCE NYLON , COLOR : SEE TABLE UL94V-0
②	ソルダーピン SOLDER PIN	りん青銅 PHOSPHOR BRONZE 錫メッキ:1.0μmＭＩＮ． TIN ニッケルメッキ（下地）:1.0μmＭＩＮ． NICKEL(UNDER PLATING)
③	ネイル NAIL	りん青銅 PHOSPHOR BRONZE 錫メッキ:1.0μmＭＩＮ． TIN ニッケルメッキ（下地）:1.0μmＭＩＮ． NICKEL(UNDER PLATING)
④	カバーテープ COVER TAPE	ポリイミドテープ POLYIMIDE TAPE

10 オーダー番号 ORDER NO.

501331 * * * *

極数 CIRCUIT SIZE　　色 COLOR

HSG COLOR		No.
自然色	NATURAL	07
黒	BLACK	12
赤	RED	22
青	BLUE	42
緑	GREEN	62

G	F	極数 CKT.
14.0	17.0	15
13.0	16.0	14
12.0	15.0	13
11.0	14.0	12
10.0	13.0	11
9.0	12.0	10
8.0	11.0	9
7.0	10.0	8
6.0	9.0	7
5.0	8.0	6

NOTES.

5. 嵌合相手：501330****
MATE WITH : 501330****
6. ソルダーピン及びネイル平坦度は,0.1ＭＡＸ．
SOLDER PIN AND NAIL COPLANARITY TO BE 0.1MAX.
7 極数 = 偶数に適用
APPLY FOR CKT SIZE=EVEN
8. ２～５極は, 5013310400-SD を参照下さい.
REFER TO 5013310400-SD ABOUT 2-5CKT.
9 トレードマーク：MXプラス1文字の製造工場を示すアルファベットにて構成
但し,"J"はJAPANを示す.
キャビティー番号：1桁から2桁の数字で表示
金型番号：アルファベット1文字にて構成.
FORMED BY MX AND 1 MORE LETTER OF ALPHABET WHICH MEAN
THE MANUFACTORY, BUT "J" MEANS JAPAN. (TO TRADE MARK)
AND BY I DIGIT NUMBER (TO CAVITY NO.)
AND BY I LETTER OF ALPHABET (TO MOLD NO.)

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

RELEASED
EC NO: 120301 2017/08/03
DRWN: QHE31 2017/08/04
CHK'D: SAKIYAMA 2017/08/04
APPR: TKANEKO

REV: A

GENERAL TOLERANCES (UNLESS SPECIFIED)
ANGULAR TOL ± 3.0 °

4 PLACES	±	0.2
3 PLACES	±	0.2
2 PLACES	±	0.2
1 PLACE	±	0.2
0 PLACES	±	0.2

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION UNITS: MM
SCALE: 10:1
DRWN BY: QHE31 DATE: 2017/08/03
CHK'D BY: SAKIYAMA DATE: 2017/08/04
APPR BY: TKANEKO DATE: 2017/08/04
DRAWING SIZE: A3
THIRD ANGLE PROJECTION

molex®

PICO-CLASP 1.0 W/B SINGLE-ROW ST
EMBSTP PKG WAFER ASS'Y

PRODUCT CUSTOMER DRAWING

SERIES	MATERIAL NUMBER	CUSTOMER
501331	SEE TABLE OF SHEET 1	

DOCUMENT NUMBER	DOC TYPE	DOC PART	SHEET NUMBER
5013310612-SD	PSD	000	3 OF 3

RELEASE STATUS	P1	RELEASE DATE	04.08.2017 10:10:40

FORMAT: master-lb-prod-A3
REVISION: G
DATE: 2017/02/06