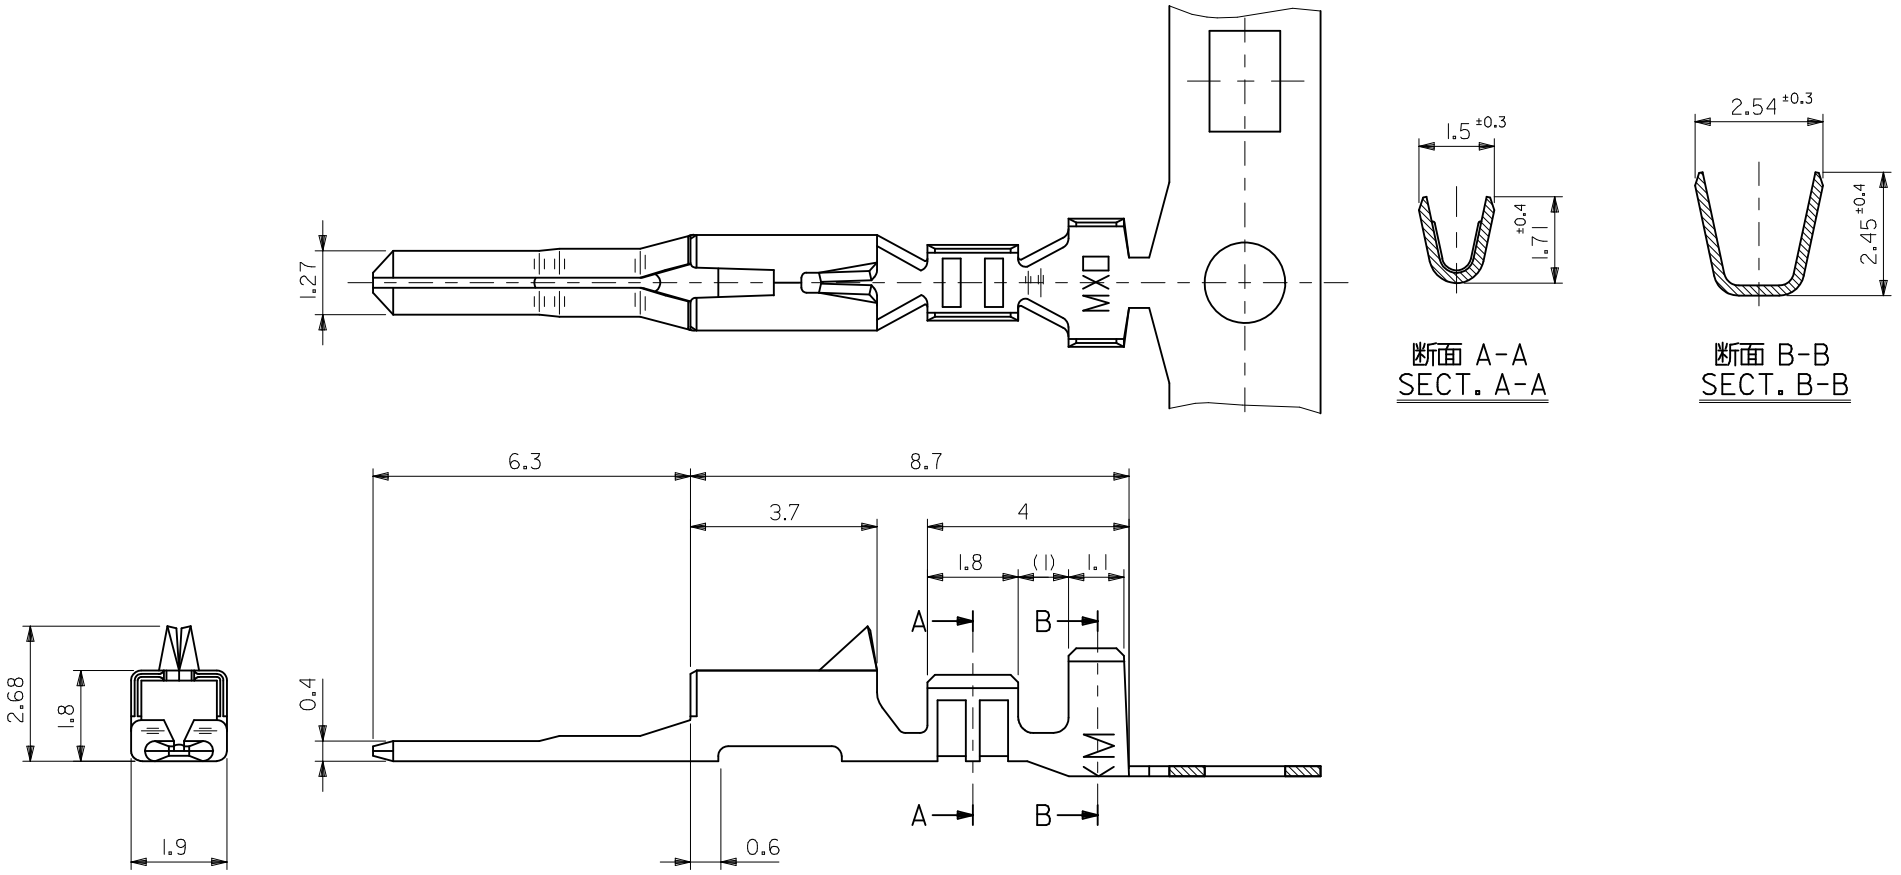


断面 A-A
SECT. A-A

断面 B-B
SECT. B-B

注記
NOTES

1. 適合ハウジング：5111 2シリーズ
   APPLICABLE HOUSING：5111 2 SERIES
2. 材料 MATERIAL
   りん青銅（t = 0.2）
   PHOSPHOR BRONZE
   錫メッキ 0.9 μm 以上 リフロー処理（前めっき）
   TIN 0.9 μm MIN. REFLOW TREATMENT (PRE-PLATED)
3. 適用電線サイズAWG #22-28
   被覆外径：1.15~1.8mm
4. ELV及びRoHS適合品
   ELV AND RoHS COMPLIANT

PLASTIC BAG	50398-8100	バラ状 LOOSE
REEL	50398-8000	連鎖状 CHAIN
PACKAGING SPEC.	オーダー番号 ORDER NO.	形態 FORM

CONNECTOR SERIES NO. 50398-8*00

RELEASED
EC NO: J2010-1818
DRWN:NYOSHIKAWA 2010/03/10
CH'KD:KASAKAWA 2010/03/10
APPR:NUKITA 2010/03/11
DESCRIPTION
REV 0

GENERAL TOLERANCES (UNLESS SPECIFIED)

10 UNDER	±0.2
10 OVER 30 UNDER	±0.25
30 OVER	±0.3
ANGULAR ±3 °	

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE: MM ONLY
SCALE: 10:1
DESIGN UNITS: METRIC
THIRD ANGLE PROJECTION

DRAWN BY: NYOSHIKAWA DATE: 2010/03/10
CHECKED BY: KASAKAWA DATE: 2010/03/10
APPROVED BY: NUKITA DATE: 2010/03/10

TITLE: 2.5 WIRE TO WIRE CONN. CRIMP PIN

MOLEX INCORPORATED

MATERIAL NO.: SEE TABLE
DOCUMENT NO.: SD-50398-001
SHEET NO.: 1 OF 1
SIZE: A3

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION